


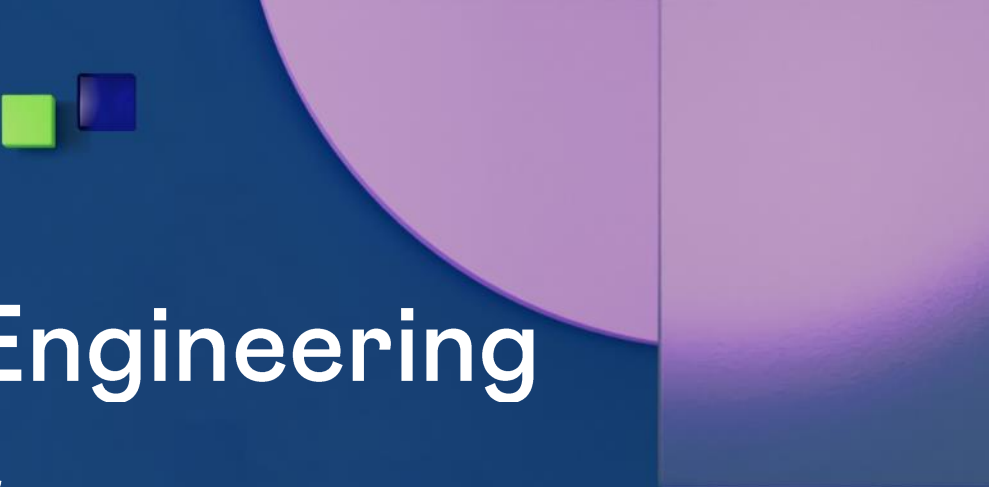

M240UAN01.0 Engineering Change Request

GDBU

01th FEB.Y23

AUO Display Plus Engineering Change Request

➤ Engineering Change item

Item	Reflector
As is	TCJ18N
To Be	EST188P

Because the Toray TCJ18N raw material has been EOL , ADP suggest to change reflector from TorayTCJ18N to EST188P

➤ Material Comparison

	As is	To be
Thickness(mm)	0.233	0.228
Front side optics	100%	←
Rear side optics (sensor hole)	100%	135%
Friction test	PASS	←
Stress test (500g & 1000g)	PASS	←

AUO Display Plus Engineering Change Request

➤ Optics→PASS

Optical Measurement Report													
Originator	chun li		Model/PCS		M240UAN01.0/5PCS				Date	2023/1/25			
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk												
Test System	Detector	Inverter		DC Voltage					Warm up time				
FPM-520-2	SR-3	NA		12V					30 min				
【Test Reason】													
M240UAN01.0(長陽反射片驗證)													
【Judgement】													
PASS													
Test Items	unit	PSS			23.0°C	23.0°C	23.0°C	23.0°C	23.0°C	-4σ	mean	+4σ	
					2023/1/23 15:53	2023/1/23 16:55	2023/1/23 17:05	2023/1/23 17:30	2023/1/23 17:56				
					B2AA6P7LJZZZ301C	B2A313KEZZZS01C	B2A8308BHZZZS01C	B2A82U3YMZZZS01C	B2A8725UFZZZS01C				
		min	typ	max									
Center Brightness	cd/m ²	240	300		328.0	321.0	324.8	309.6	328.7	291.268	322.4	353.572	
Darkness (L0)					0.27	0.24	0.26	0.24	0.25	0.202	0.25	0.297	
Contrast Ratio(CR)	---	600	1000		1236.8	1347.6	1254.1	1288.4	1339.4	1094.916	1293.3	1491.603	
Brightness(5P Ave.)	cd/m ²				300.4	303.8	303.1	298.9	301.6	293.734	301.6	309.410	
Chromaticity													
	Wx	---	0.283	0.313	0.343	0.319	0.316	0.318	0.319	0.323	0.310	0.319	0.328
	Wy	---	0.299	0.329	0.359	0.338	0.333	0.338	0.337	0.342	0.323	0.337	0.351
	Rx	---	0.629	0.659	0.689	0.661	0.661	0.661	0.660	0.661	0.660	0.661	0.661
	Ry	---	0.302	0.332	0.362	0.332	0.332	0.333	0.333	0.333	0.332	0.332	0.333
	Gx	---	0.275	0.305	0.335	0.304	0.305	0.304	0.303	0.305	0.302	0.304	0.307
	Gy	---	0.596	0.626	0.656	0.617	0.616	0.616	0.616	0.616	0.613	0.616	0.619
	Bx	---	0.118	0.148	0.178	0.145	0.144	0.144	0.145	0.144	0.143	0.144	0.145
	By	---	0.023	0.053	0.083	0.063	0.062	0.064	0.063	0.065	0.058	0.063	0.069
	NTSC	---	---	72	---	76.9	76.8	76.5	76.6	76.2	75.644	76.604	77.565
	CCT	---	---	---	---	6143	6303	6174	6148	5955	5646.820	6144.792	6642.763
Uniformity													
	5P					1.203	1.164	1.175	1.141	1.191	1.078	1.175	1.271
	9P	White		1.250	1.333	1.225	1.180	1.269	1.182	1.240	1.065	1.219	1.373

RA test

Reliability→PASS



RA Test Summary Report

保管單位 Storage	RA
保存年限 Retention Period	依產品適用範圍保存(參照：AUQP-05-002 紀錄管制流程)

Product No	M240UAN01.0		Part No	97.24M13.0G0		Applicant/Dept		包棟琴/RRPBF3		Judgement	
Test Purpose	M240UAN01.0(長陽反射片驗證)					Application Date		2023/01/06		PASS	
						Input Date		2023/01/12			
RA No	R230111022		Product Stage	MVT		Issue Date					
Test Item	Test Condition	Test Panel					Test Result				
THB	50°C 80% 300h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	Judgement	Judgement
		R2301110220001		2b2ab141cmzzs01g0		OK	OK	OK	OK	PASS	
		R2301110220002		2d2a8725ujzzs01g0		OK	OK	OK	OK	PASS	
		R2301110220003		2b2a8308nbzzs01g0		OK	OK	OK	OK	PASS	
TST	-20°C(30min) ~ 60°C(30min), 100cycles judge, 200cycles reference, 200cycles	No	Chip_Id	Shipping_No		C0★	C100★	C200		Judgement	Judgement
		R2301110220004		2b2a82u3yezzs01g0		OK	OK	OK		PASS	
		R2301110220005		2b2ab143nazzs01g0		OK	OK	OK		PASS	
		R2301110220006		2b2a8308blzzs01g0		OK	OK	OK		PASS	
Remark		「★ 為 Judge Point · 非 Judge Point 的 Defect Alarm 請參考以下 Defect Description」									

EC plan



- Current Plan: EC sample will be shipped on 2/B, ADP looks forward to getting customer agreement by the end of 05/2023 and running the EC phase-in.



Tap Into The Possibilities