

Two small squares, one green and one blue, are positioned above the main title.


EC Notice

G270ZAN01.501 to 503

2024/06/25

Summary


➤ Plan schedule:

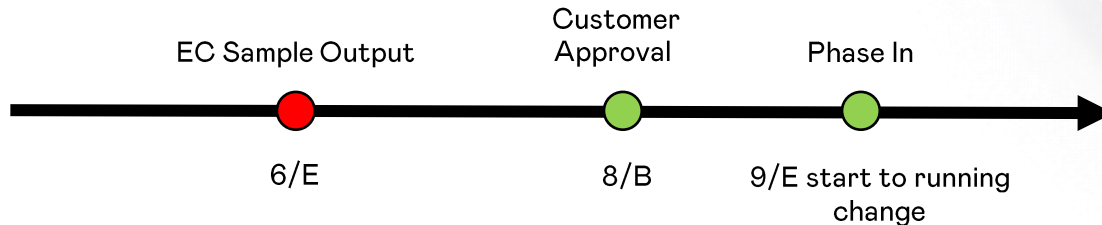

Item	EC item	Current	New	Background and Purpose
1	Reflector vendor	Toray (TCJ22N)	Toray (TCJ18N)	Toray reflector (TCJ22N) will be EOL. In order to keep supply smoothly, we would like to adopt Toray (TCJ18N) reflector.
2	Polarizer film	BMC (RTT5XX)	BMC (RTT2XX with HC)	Downer hard coating polarizer film: for scratch improvement

EC Item 2 : Polarizer film

- To reduce the scratch defect, we add the surface treatment (**Hard Coating**) on the Polarizer

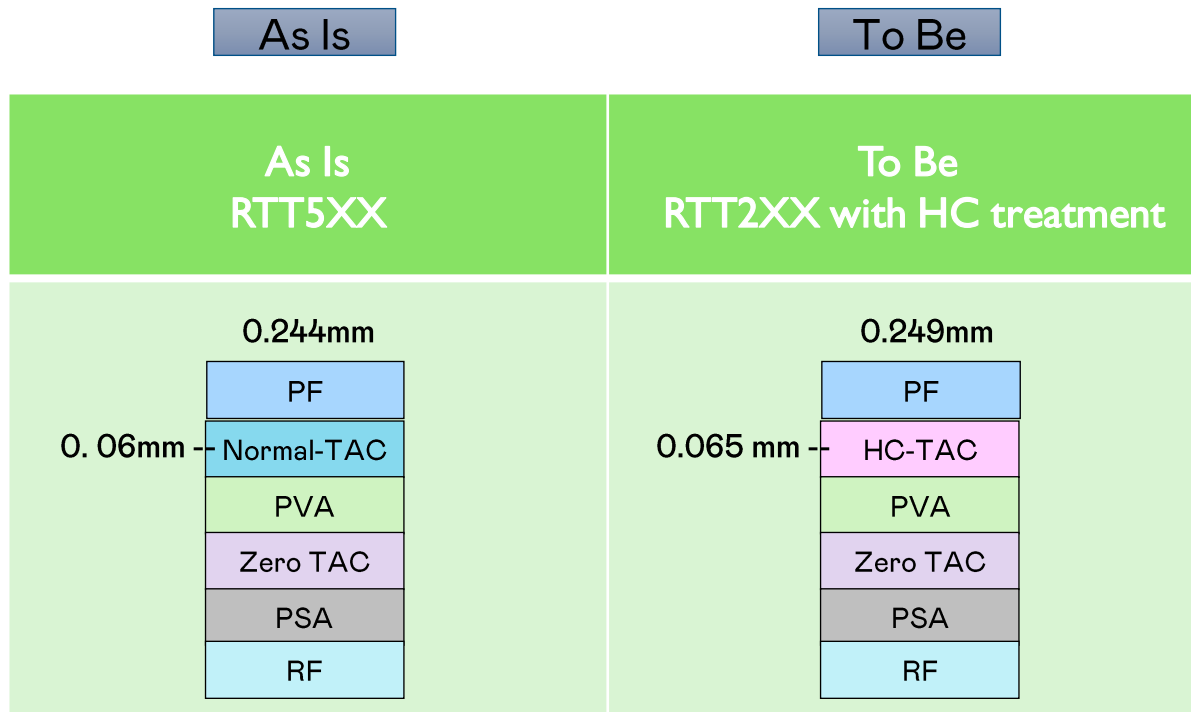

◆ Material structure comparison

RA Optical result

➤ RA for reflector change : Pass

Optical Measurement Report												
Originator	chun li			Model/PCS		G270ZAN01.5 /5pcs				Date	2024/6/24	
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker											
Test System	Detector		Invert er		DC Voltage						Warm up time	
FPM-520-1	SR-UL1R	NA			24V						30 min	
【Test Reason】												
G270ZAN01.503 TCJ-18反射片驗證 (DVT1-2) + 下偏加硬之EC (RTT2XX with HC)												
【Judgement】												
PASS												
Test Items	unit	PSS			23.0°C 2024/6/24 上午 08:05:09	23.0°C 2024/6/24 上午 08:36:59	23.0°C 2024/6/24 上午 09:19:01	23.0°C 2024/6/24 上午 10:13:13	23.0°C 2024/6/24 上午 10:24:16	-4σ	mean	+4σ
					703B20Z1YEZZS0103	703B20Z1EFZZS0103	703B21R03EZZS0103	703B21Q4BCZZS0103	703B20D7CFZZS0103			
		min	typ	max	D159D27G010114509E2P0181007600	D159D27G010114509E2P0181004000	D159D27G010114509E2P0181007300	D159D27G010114509E2P0181007000	D159D27G010114509E2P0181002800			
Center Brightness	cd/m ²	400	500		492.9	502.6	492.7	488.2	539.3	419.596	503.1	586.684
Darkness (L0)					0.41	0.43	0.40	0.56	0.44	0.191	0.45	0.702
Contrast Ratio(CR)	---	700	1000		1211.9	1178.2	1232.4	877.3	1218.8	542.613	1143.7	1744.784
Brightness (5P Ave.)	cd/m ²				490.8	508.4	488.9	497.3	540.3	420.862	505.1	589.418
Chromaticity												
Wx	---	0.283	0.313	0.343	0.316	0.323	0.316	0.318	0.310	0.297	0.316	0.336
Wy	---	0.299	0.329	0.359	0.326	0.334	0.330	0.327	0.330	0.317	0.330	0.342
Rx	---	0.644	0.674	0.704	0.676	0.676	0.675	0.675	0.673	0.671	0.675	0.679
Ry	---	0.280	0.310	0.340	0.311	0.311	0.311	0.311	0.312	0.310	0.311	0.312
Gx	---	0.235	0.265	0.295	0.265	0.267	0.264	0.265	0.266	0.261	0.265	0.270
Gy	---	0.630	0.660	0.690	0.660	0.660	0.661	0.660	0.662	0.657	0.661	0.664
Bx	---	0.123	0.153	0.183	0.150	0.150	0.150	0.150	0.150	0.149	0.150	0.151
By	---	0.024	0.054	0.084	0.045	0.048	0.045	0.046	0.046	0.042	0.046	0.050
NTSC	---				92.5	92.0	92.7	92.2	92.1	91.168	92.305	93.443
CCT	---				6348	5935	6341	6251	6670	5258.637	6308.783	7358.929



Tap Into The Possibilities

