




G213UAN01.0/1 ECR

2025/08/11

Summary

➤ Plan schedule:

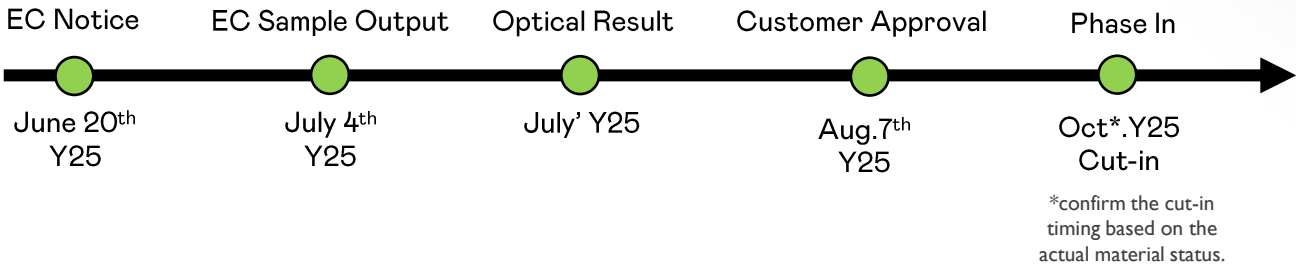

Item	EC item	Current	New	Background and Purpose
1	Reflector	TORAY TCJ-18N	TOREY E6DY-188	The original reflector material is discontinued, Need switch to a new material and we will also validate alternative material. from TCJ-18N change to E6DY-188. Expect LTB quantity will last until the end of 2025.

Optical Test Result

➤ G213UAN01.0 : Optical Test
PASS

Optical Measurement Report												
Originator	yongde		Model/PCS		G213UAN01.0/5pcs				Date	2025/7/17		
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker											
Test System	Detector	Inverter			DC Voltage					Warm up time		
FPM-520-1	SR-UL1R	NA			24V					30 min		
【Test Reason】												
G213UAN01-0/02 RA实验												
【Judgement】												
PASS												
Test Items	unit	PSS			23.0°C	23.0°C	23.0°C	23.0°C	23.0°C	-4σ	mean	+4σ
		min	typ	max								
Center Brightness	cd/m ²	400	500		599.2	596.1	592.8	586.2	587.0	569.669	592.3	614.851
Darkness (L0)					0.34	0.34	0.30	0.34	0.33	0.254	0.33	0.400
Contrast Ratio(CR)	---	1260	1800		1758.2	1773.1	2006.8	1747.8	1795.1	1384.120	1816.2	2248.244
Brightness(5P Ave.)	cd/m ²				584.1	574.4	572.4	565.5	574.0	547.606	574.1	600.570
Chromaticity												
	Wx	---	0.269	0.299	0.329	0.309	0.311	0.311	0.308	0.310	0.305	0.310
	Wy	---	0.285	0.315	0.345	0.327	0.325	0.328	0.328	0.328	0.323	0.327
	Rx	---	0.626	0.656	0.686	0.656	0.657	0.659	0.659	0.659	0.652	0.658
	Ry	---	0.300	0.330	0.360	0.332	0.331	0.331	0.331	0.331	0.330	0.331
	Gx	---	0.285	0.315	0.345	0.314	0.314	0.315	0.313	0.313	0.311	0.314
	Gy	---	0.610	0.640	0.670	0.639	0.639	0.639	0.641	0.640	0.637	0.640
	Bx	---	0.120	0.150	0.180	0.148	0.148	0.148	0.148	0.148	0.147	0.148
	By	---	0.029	0.059	0.089	0.065	0.065	0.065	0.065	0.065	0.064	0.065
	SRGB	%		100		99.1%	99.2%	99.1%	99.3%	99.3%	0.987	0.992
											0.997	

Optical Test Result

➤ G213UAN01.1: Optical Test PASS

Optical Measurement Report												
Originator	yongde		Model/PCS		G213UAN01.0/5pcs				Date	2025/7/17		
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker											
Test System	Detector	Inverter			DC Voltage					Warm up time		
FPM-520-1	SR-UL1R	NA			24V					30 min		
【Test Reason】												
G213UAN01-0/02 RA实验												
【Judgement】												
PASS												
Test Items	unit	PSS			23.0°C	23.0°C	23.0°C	23.0°C	23.0°C	-4σ	mean	+4σ
					5H1AV5MFZZS01	5H2AN9AEZZS01	5H2AP6JAZZS01	5H2BN7DAZZS01	5H2AP6JCZZS01			
		G0700856KBG4P01	G0700856KBG4P01	G0700856KBG4P01	G0700856KBG4P01	G0700856KBG4P01						
		min	typ	max								
Center Brightness	cd/m ²	400	500		599.2	596.1	592.8	586.2	587.0	569.669	592.3	614.851
Darkness (L0)					0.34	0.34	0.30	0.34	0.33	0.254	0.33	0.400
Contrast Ratio(CR)	---	1260	1800		1758.2	1773.1	2006.8	1747.8	1795.1	1384.120	1816.2	2248.244
Brightness(5P Ave.)	cd/m ²				584.1	574.4	572.4	565.5	574.0	547.606	574.1	600.570
Chromaticity												
	Wx	---	0.269	0.299	0.329	0.309	0.311	0.311	0.308	0.310	0.305	0.310
	Wy	---	0.285	0.315	0.345	0.327	0.325	0.328	0.328	0.323	0.327	0.331
	Rx	---	0.626	0.656	0.686	0.656	0.657	0.659	0.659	0.652	0.658	0.663
	Ry	---	0.300	0.330	0.360	0.332	0.331	0.331	0.331	0.330	0.331	0.332
	Gx	---	0.285	0.315	0.345	0.314	0.314	0.315	0.313	0.311	0.314	0.317
	Gy	---	0.610	0.640	0.670	0.639	0.639	0.639	0.641	0.637	0.640	0.642
	Bx	---	0.120	0.150	0.180	0.148	0.148	0.148	0.148	0.147	0.148	0.148
	By	---	0.029	0.059	0.089	0.065	0.065	0.065	0.065	0.064	0.065	0.066
SRGB %				100		99.1%	99.2%	99.1%	99.3%	99.3%	0.987	0.992
© AUO Display Panel Production Procedure												

RA Test Result

- RA test result : 2025/8/E

