



P370IVN02.2 DB Connector EC Report



SJ Ji

PHIAA0





Date: 2024/12/03

Connector EC Proposal

- Purpose : Utilize lock type connector for enhanced stability and fixation.
- EC item : DB connector, DB to LB Wire
- EC date & mode : 2025/1 running change
- EC comparison: shown as below pictures,
The EC will be converted from normal type to lock type.

- RA test item: Vehicle Vibration Test(Follow EN 61373)

RA test item	Condition	Result
Vibration	Random (0.21Grms 5~150Hz), 5hr /X axis Random (0.434Grms 5~150Hz), 5hr/ Y axis Random (0.281Grms 5~150Hz), 5hr / Z axis * One time each direction	PASS

EC item	P/N	
DB	P/N unchanged, version updated	
Wire	New P/N	
Connector	Before	After (Lock type)
DB Receptacle		
Wire Plug		

Vehicle Vibration Test



友达光电(厦门)有限公司实验室
Laboratory of AUO Corporation(Xiamen)

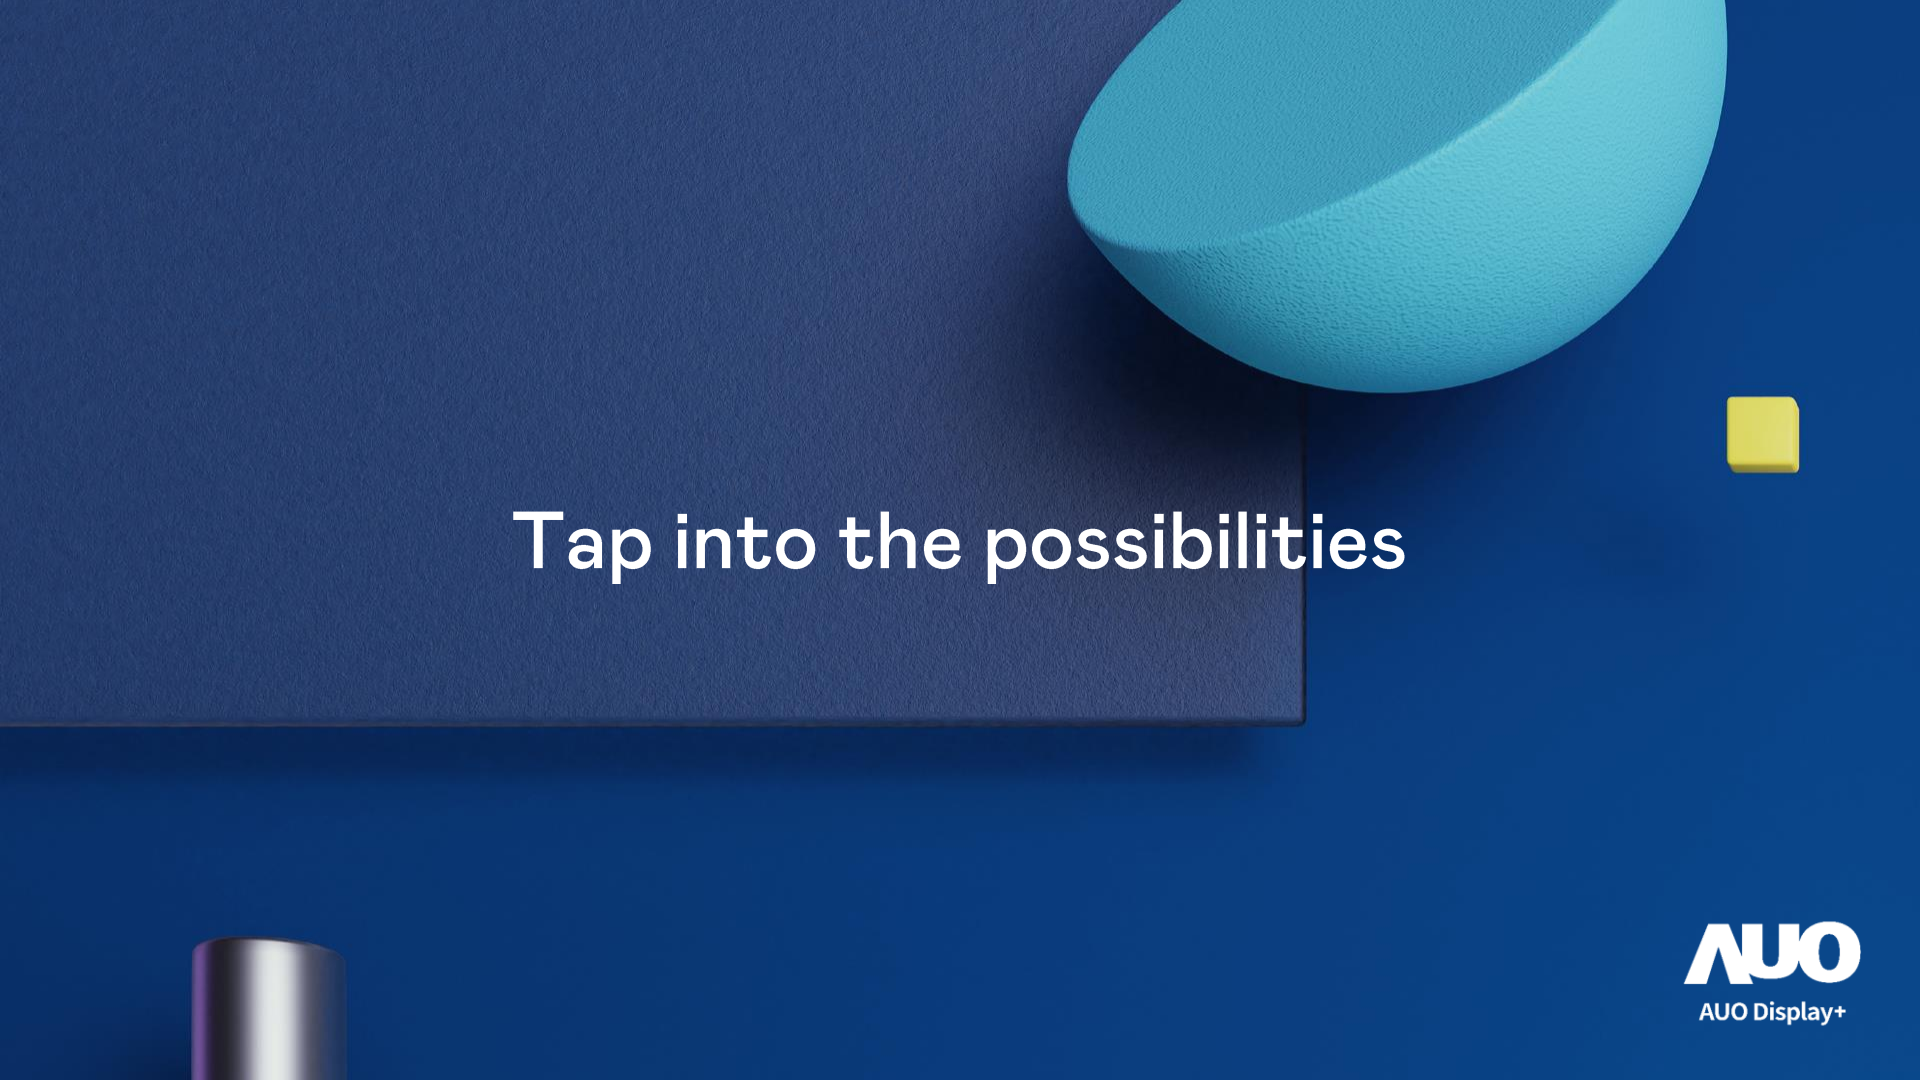
P370IVN02.2 Reliability Test Report

Test Object :	DB&LB Wire CNT增加lock type验证
Test Results :	PASS
Model Type :	P370IVN02.2
Issue date:	2024/12/2
Part No.:	97.37P03.201-S13
RA No. :	R241129005

Test Result (Summary)

Test Item	Test Condition	Q'ty	Test Date	Judge
Vibration	车载震动: Random (0.21Grms 5~150Hz), 5hr /X axis , Random (0.434Grms 5~150Hz), 5hr/ Y axis , Random (0.281Grms 5~150Hz), 5hr / Z axis	3	2024/11/27~12/2	PASS

Test Item	No.	Model	S/N
Vibration	1	P370IVN02.2	FH3CCNY6LHZZZS1301
	2		F43CAPT4VFZZZS1301
	3		F43C68J4ALZZZS1301



Tap into the possibilities