




G185HAN01.000 EC Report

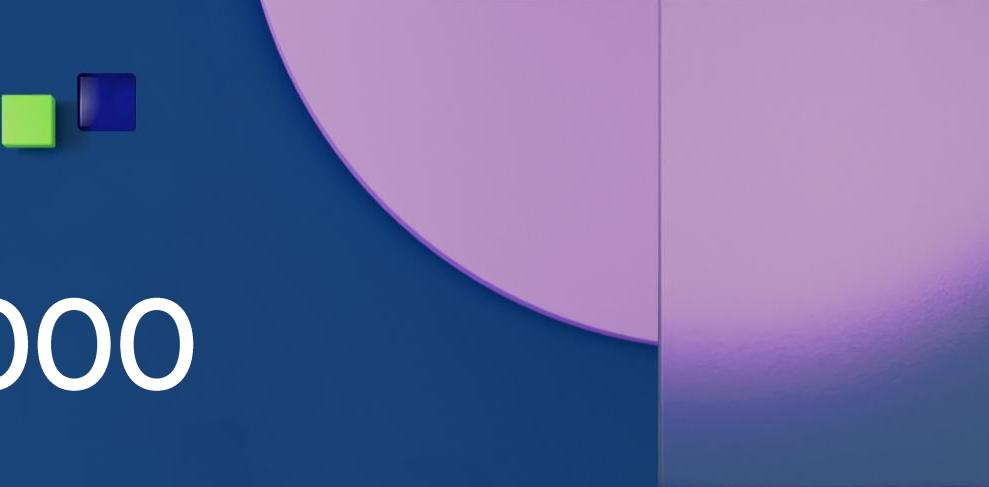

2023/06/09

G185HAN01.0 EC Notice

Purpose :

Since Tcon IC (12304 Z03) will be EOL. In order to keep supply smoothly, ADP will launch a replaced model, including new cell, PCBA(Tcon IC 12303 Z09) and BLU for longevity support.

Replacement model :

G185HAN01.000=> G185HAN01.004, new product specification need to be changed as below.

- Display Characteristics
- EC Change
 - T con IC
 - LC
 - BLU
 - PCBA

Verification schedule:

1. Verification samples will come out at the 2023/07.
2. RA / EMI / ESD all test passed
3. Customer Approval : 2023/12
4. Phase in => 2024/Q1

General Display Characteristics

Panel supplier	MP (now)	EC model
Mode	AHVA	AHVA
Model name	G185HAN01.000	G185HAN01.004
Resolution	1920 x 1080	1920 x 1080
Active Area(mm)	408.96 x 230.04	408.96 x 230.04
Outline dimension(mm) (W x H x D)	430.4 x 254.6 x 12	430.4 x 254.6 x 12
Treatment	Antiglare (Haze25%) / (3H)	Antiglare (Haze 25%) / (3H)
Contrast Ratio (Typ.)	1000:1	1000:1
Viewing Angle (CR≥10) (Typ.)	89/89/89/89	89/89/89/89
Response Time (Tr+Td) (Typ.)	20ms	20ms
Brightness (cd/m ²) (Typ.)	350	350
NTSC	72%	72%
Weight (g)	1200g	1750g
Interface	LVDS / True 8 bit	LVDS / True 8 bit
Operating Temperature	-20~70 °C	-30~80 °C
Storage Temperature	-20~70 °C	-30~80 °C
LED life time	50K	50K
LED driver board	Y	Y
Color Coordinates	x:0.299 ; Wy:0.315	x:0.299 ; Wy:0.315


EC Change

Items	Before (G185HAN01.000)	After (G185HAN01.004)
Tcon IC	AUO 12304 Z03	AUO 12303 Z09
LC	ZAU-5396XX	LCT-16-193I
BLU	AL5052	SGLC
	E6QD-225	EST225P

PCBA Change

- Keep outline and same mounting hole.
- PCBA size change, and connector position move up 15mm.


G185HAN01.000

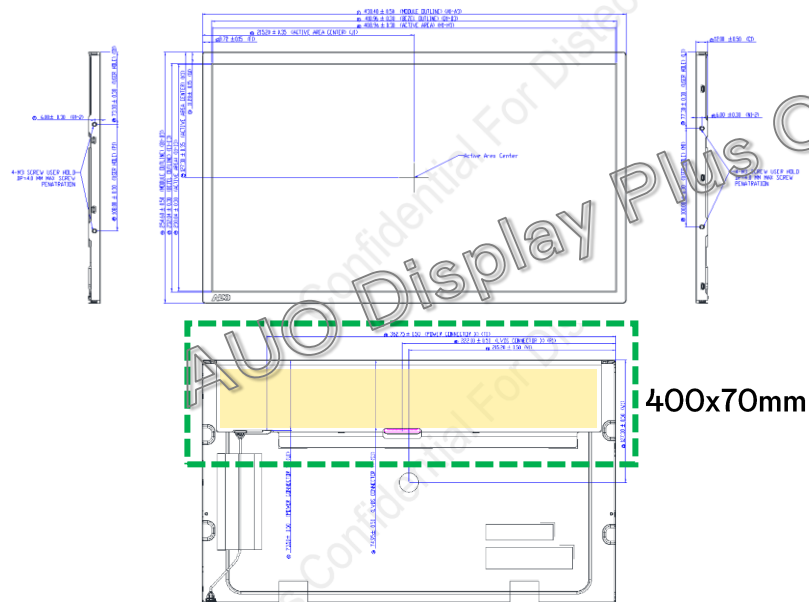

400x70mm



G185HAN01.004

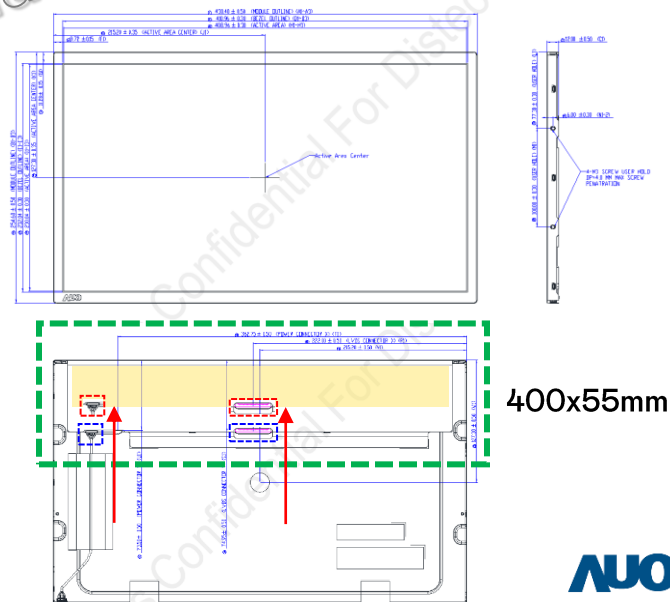

400x55mm

RA report-1

Product No	G185HAN01.0		Part No	97.18G03.004		Judgement					
Test Purpose	G185HAN01.004 EC					PASS					
RA No	D221216008		Product Stage	DVT							
Test Item	Test Condition	Test Panel			Test Result						
THB	50°C 80% 500h	No	Chip_Id	Shipping_No	T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		D2212160080001		112B94M1ZMZZS0104	OK	OK	OK	OK	OK	PASS	PASS
		D2212160080002		112B94M12LZZS0104	OK	OK	OK	OK	OK	PASS	
		D2212160080003		112B94M14BZZS0104	OK	OK	OK	OK	OK	PASS	
HTO	80°C 500h	No	Chip_Id	Shipping_No	T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		D2212160080004		112B94M14LZZS0104	OK	OK	OK	OK	OK	PASS	PASS
		D2212160080005		112B94M1XDZZS0104	OK	OK	OK	OK	OK	PASS	
		D2212160080006		112B94M1UHZZS0104	OK	OK	OK	OK	OK	PASS	
HTS	80°C 500h	No	Chip_Id	Shipping_No	T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		D2212160080007		112B94M12CZZS0104	OK	OK	OK	OK	OK	PASS	PASS
		D2212160080008		112B94M1WGZZS0104	OK	OK	OK	OK	OK	PASS	
		D2212160080009		112B94M1UAZZS0104	OK	OK	OK	OK	OK	PASS	
TST	-20°C/30min, 60°C/30min, 100 cycles judge 100cycles	No	Chip_Id	Shipping_No	C0★	C100★				Judgement	Judgement
		D2212160080010		112B94M12EZZS0104	OK	OK				PASS	PASS
		D2212160080011		112B94M13GZZS0104	OK	OK				PASS	
		D2212160080012		112B94M1WFZZS0104	OK	OK				PASS	
LTO	-30°C 500h	No	Chip_Id	Shipping_No	T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		D2212160080013		112B94M11JZZS0104	OK	OK	OK	OK	OK	PASS	PASS
		D2212160080014		112B94M11LZZS0104	OK	OK	OK	OK	OK	PASS	
		D2212160080015		112B94M1VMZZS0104	OK	OK	OK	OK	OK	PASS	
LTS	-30°C 500h	No	Chip_Id	Shipping_No	T0★	T100★	T200★	T300★	T500	Judgement	Judgement
		D2212160080016		112B94M1VGZZS0104	OK	OK	OK	OK	OK	PASS	PASS
		D2212160080017		112B94M1WBZZS0104	OK	OK	OK	OK	OK	PASS	
		D2212160080018		112B94M1XLZZS0104	OK	OK	OK	OK	OK	PASS	


RA report-2

Optical Measurement Report												
Originator	chongfeng			Model/PCS		G185HAN01.0/5PCS			Date		2023/4/1	
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker											
Test System	Detector		Inverter		DC Voltage					Warm up time		
FPM-520-2	SR-UL1R		NA		12V					30 min		
【 Test Reason 】												
G185HAN01.004 EC RA test												
【 Judgement 】												
PASS												
Test Items	unit	PSS			23.5°C	23.5°C	23.5°C	23.5°C	23.5°C	-4σ	mean	+4σ
					2B94M11XAZZS01	2B94M11UKZZS01	2B94M11ZAZZS01	2B94M112KZZS01	2B94M114HZZS01			
		min	typ	max								
Center Brightness	cd/m ²	280	350		429.4	433.0	429.4	437.3	423.7	410.447	430.6	450.673
Darkness (L0)					0.25	0.24	0.24	0.24	0.24	0.230	0.24	0.255
Contrast Ratio(CR)		800	1000		1742.7	1815.5	1757.7	1798.8	1758.8	1651.176	1774.7	1898.245
Brightness(5P Ave)	cd/m ²				414.6	416.3	413.0	418.7	407.7	397.582	414.1	430.546
Chromaticity												
Wx	---	0.249	0.299	0.349	0.301	0.300	0.301	0.301	0.298	0.296	0.300	0.304
Wy	---	0.265	0.315	0.365	0.322	0.322	0.322	0.321	0.320	0.318	0.321	0.324
Rx	---	0.596	0.646	0.696	0.647	0.646	0.647	0.646	0.646	0.644	0.646	0.648
Ry	---	0.283	0.333	0.383	0.333	0.333	0.333	0.333	0.333	0.332	0.333	0.334
Gx	---	0.255	0.305	0.355	0.296	0.297	0.297	0.297	0.296	0.295	0.296	0.298
Gy	---	0.565	0.615	0.665	0.610	0.609	0.609	0.609	0.608	0.606	0.609	0.612
Bx	---	0.105	0.155	0.205	0.147	0.147	0.147	0.148	0.147	0.147	0.147	0.148
By	---	0.010	0.060	0.110	0.074	0.074	0.074	0.073	0.076	0.070	0.074	0.078
NTSC	---	---	72%	---	72.3	72.2	72.2	72.3	71.7	71.153	72.131	73.109
CCT	---	---	---	---	7316	7321	7292	7316	7482	7036.444	7345.352	7654.260

EMI / ESD report

EMI

PASS

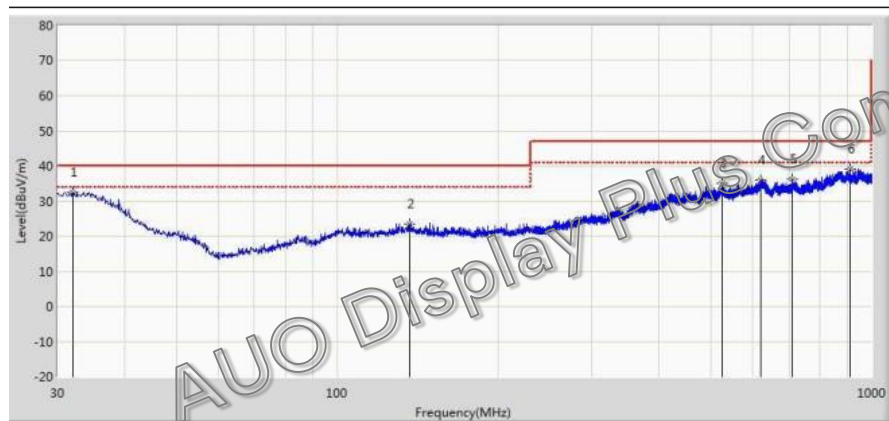

ESD

PASS

Contact Discharge			Air Discharge		
IEC Level	Test Voltage	Result	IEC Level	Test Voltage	Result
1	±2kV	A	1	±2kV	A
2	±4kV	A	2	±4kV	A
3	±6kV	B	3	±8kV	B
4	±8kV	B	4	±15kV	B



Tap Into The Possibilities