




IO male pin output soldered into circuit board.





Resistor. By convention they are all 10kΩ, but they only need to be equal for each channel.

Micro-USB port



+ 5V DC

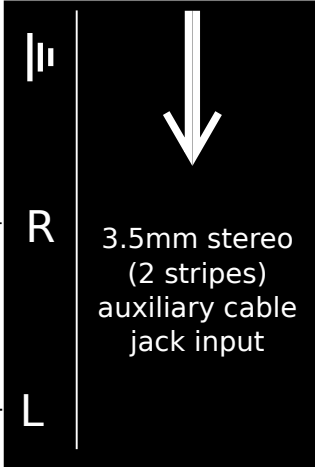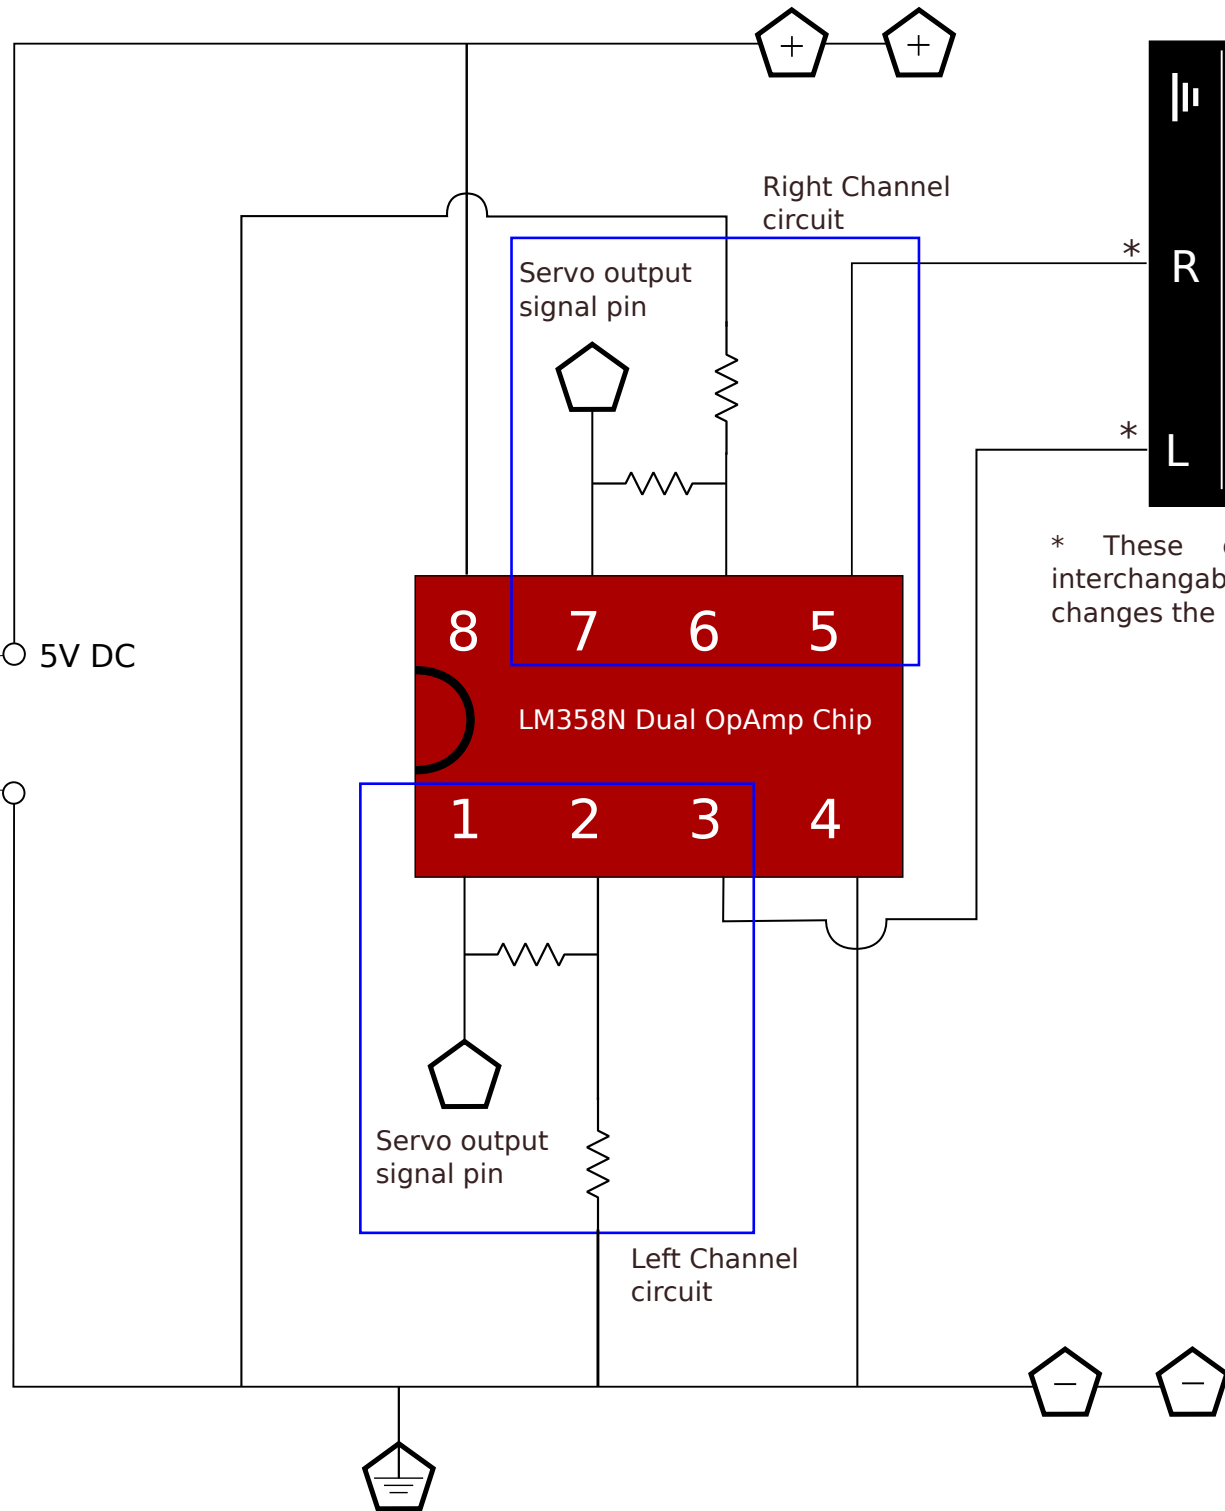

* These connections are interchangeable, just that it changes the output terminals.