

Important Reminder

The measurement of NPK adopts the general rapid detection method, so there are certain error, Use with caution for planting reference.

However, the sensor supports the function of writing NPK data. You can use standard instruments to measure NPK then write in to provide data for monitoring system.

Measuring and Logging Soil Moisture Temperature Humidity EC PH NPK Sensor with HMI touch screen

CWT-SOIL sensor is for soil temperature and moisture, PH, conductivity (EC), measurement, compared with the original German high-precision sensors and soil drying method of weighing the actual calibration, high precision, fast response, stable output. By the soil salt content of small, suitable for all kinds of soil. Long-term buried in the soil, resistant to long-term electrolysis, corrosion resistance, vacuum potting, completely waterproof.



Note: we will send EU/US/AU/UK power adapter according to delivery address





Note: this product does not has inside battery. It must be powered by external power source.

if you need it with inside battery, take a look at this one:

Click below image to view more



7 in 1



Soil parameters measuring

Measure items	Parameters
Temperature	- Measuring range: -40°C-80°C - Accuracy: ±5°C (25°C) - Long-term stability: ≤0.1%/y - Response time: ≤15s
Humidity	- Measuring range: 0-100%RH - Accuracy: 2% within 0-50%, 3% within 50-100% - Long-term stability: ≤1%RH/y - Response time: ≤4s
Conductivity (EC)	- Measuring range: 0-20000us/cm - Accuracy: ±3% (0-10000 us/cm); ±5% (10000-20000 us/cm) - Long-term stability: ≤1uS/cm - Response time: ≤1s
PH	- Measuring range: 3-9 PH - Accuracy: ±0.3PH - Long-term stability: ≤5%/year - Response time: ≤10S
Nitrogen Phosphorus Potassium	- Measuring range: 1-1999 mg/kg(mg/L) - Resolution: 1 mg/kg(mg/L) - Response time: <1S



Basic parameters

Power supply	DC4.5-30V
Max Power consumption	0.5W@24V DC
Protection class	IP68, long-term immersion in water use
Cable length	Default is 2m (can be customized)
Operating environment	-40°C-80°C
Overall dimensions	45* 15 * 123mm
Output	RS485

Functions and Features

- (1) The sensor compact design, easy to carry, installation, operation and maintenance.
- (2) reasonable structure design, stainless steel probe life assurance.
- (3) soil less affected areas are widely used.
- (4) High measurement accuracy, reliable performance, ensure proper operation
- (5) fast response, high data transmission efficiency.

Applicable to the field of water-saving irrigation, greenhouse vegetables, flowers, gardening, grass pastures, soil-speed measurement, plant cultivation, scientific testing.

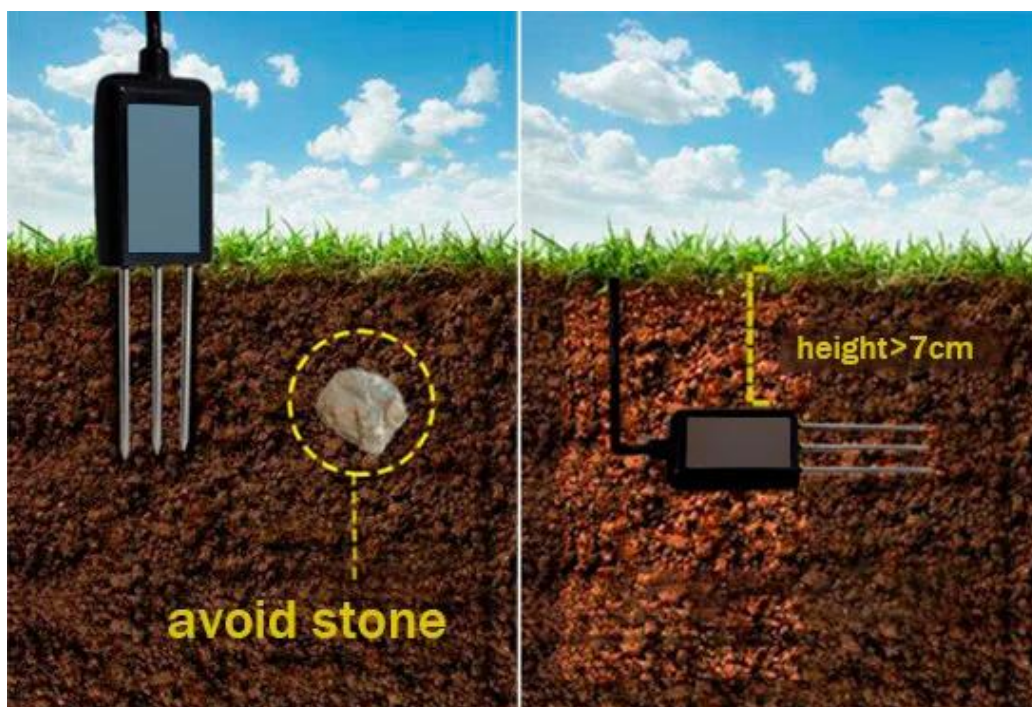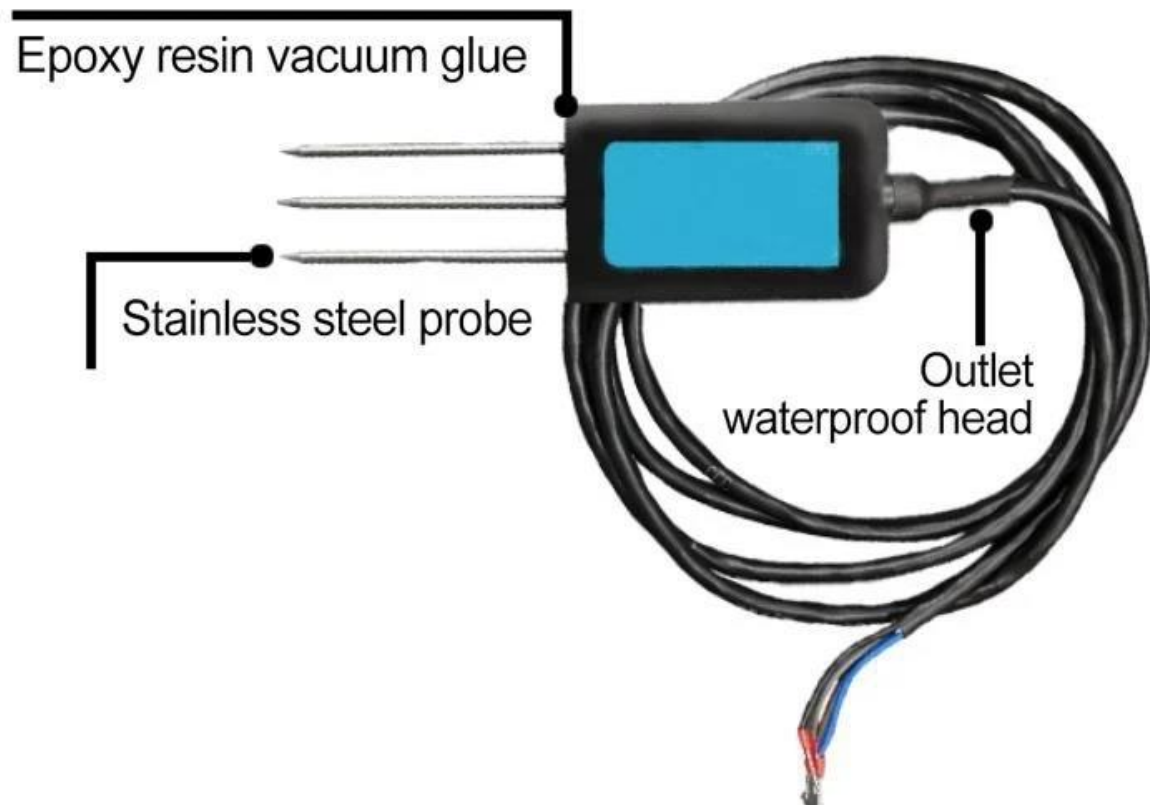





4.3 inch HMI Touch Screen features:

- ① 4.3 inch HMI Touch Screen, 480*272 resolution.
- ② Power: 9-30V DC.
- ③ Connect only one RS485 soil sensor, work with H-S, TH-S, THC-S, THPH-S, CPH-S, THCPH-S, NPKTHPH-S, NPKTHC-S, NPKPH-S, NPKPHC-S, NPKPHCTH-S (don't work with PH-S, NPK-S).
- ④ Dashboard and curve for monitoring of soil sensor.
- ⑤ Support set calibration on screen.
- ⑥ Support 1900 logs, settable interval v of logging, can export logs to SD card.

Dashboard



Realtime curve




Data logging, can export to SD card



Set calibration



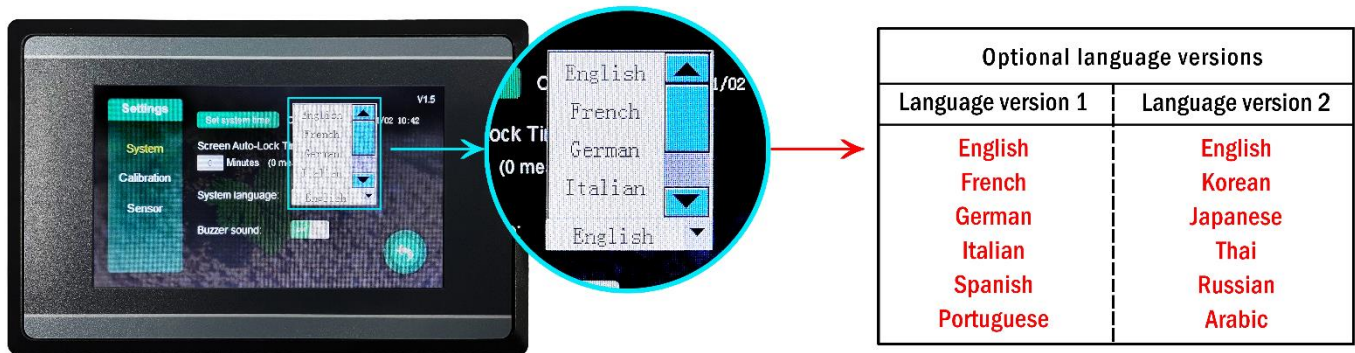

Can setup system language:

Language version 1: Support **English, French, German, Italian, Spanish, Portuguese.**

Language version 2 : Support **English, Korean, Japanese, Thai, Russian, Arabic.**

It can also be customized in other system languages.

4.3 inch HMI Touch Screen features:

1. 4.3 inch HMI Touch Screen, 480*272 resolution
2. Power: 9-30V DC
3. Dashboard and curve for monitoring of soil sensor
4. Support set calibration on screen
5. Support 1900 logs, settable interval of logging, can export log to SD card
6. Can setup system language:

Language version 1: Support English, French, German, Italian, Spanish, Portuguese

Language version 2 : Support English, Korean, Japanese, Thai, Russian, Arabic

It can also be customized in other system languages.