


LL249 Slim LED Trunking/Linear Light






Features


- High efficiency: up to 140lm/w
- UGR<19 (80°), Basic (110°)
- Flexible: Interconnect/Stand-alone
- Fast and easy
- 5 years warranty

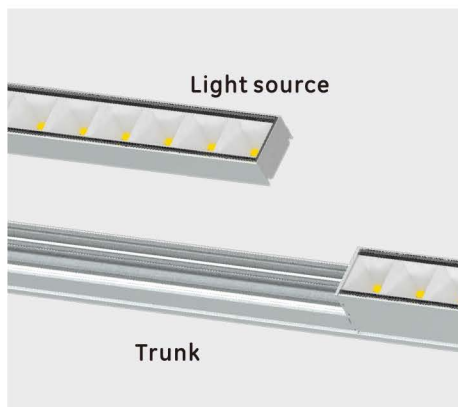

Trunking

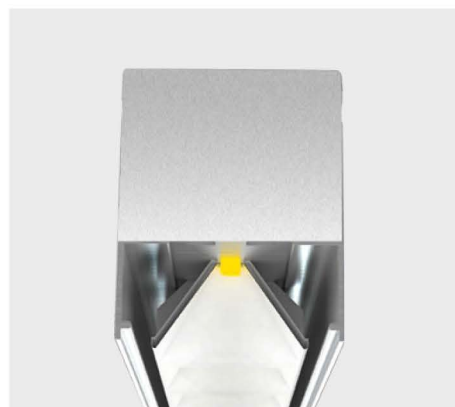

**Anti-glare design
UGR<19**

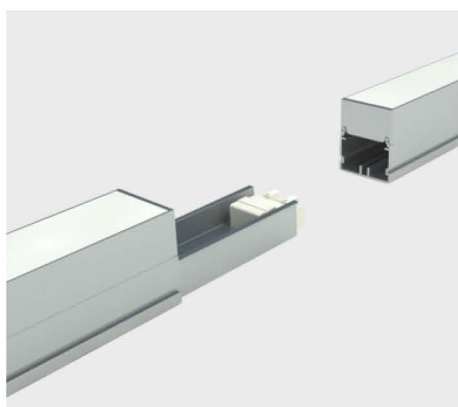

Gapless Linkable




Stand-alone


Blind module

A VARIETY OF SOLUTIONS


Interconnection



"L" type




"T" type



"+" type



Track Linear Light

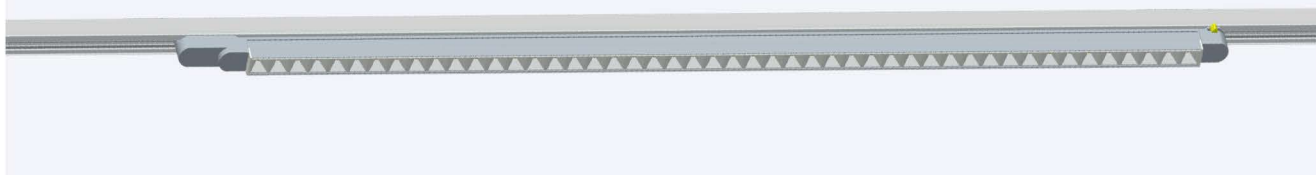



Type

Interconnect

UGR<19





Basic-Frosted



Stand-alone


UGR<19



Basic-Frosted





Linkable version

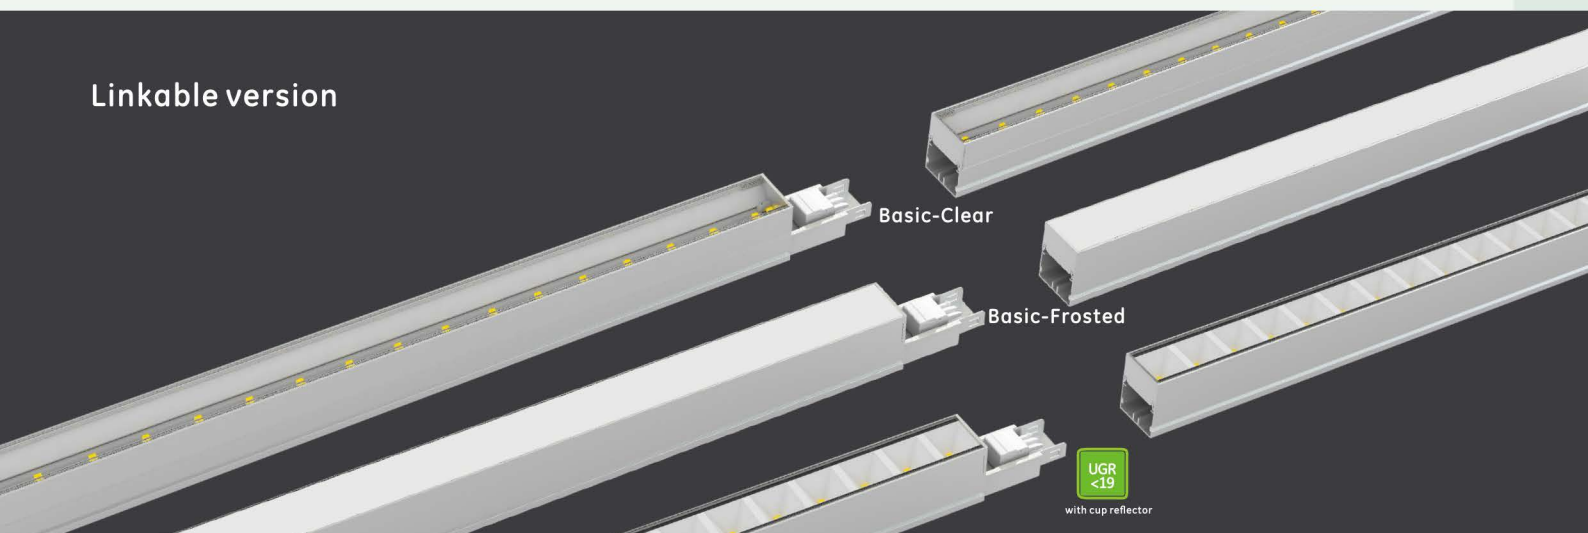

Basic

CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 50000Hrs





Parameter

Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC
249-0001	1200	25	3250	Epistar2835	110°	Frosted
249-0002	1200	50	6500	Epistar2835	110°	Frosted
249-0003	1500	30	3900	Epistar2835	110°	Frosted
249-0004	1500	60	7800	Epistar2835	110°	Frosted

UGR<19

CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 90000Hrs




Parameter

Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC
249-0005	1200	20	2400	Samsung3030	80°	Clear
249-0006	1500	25	3000	Samsung3030	80°	Clear

MAXIMUM INTERCONNECTION QTY



Wire Diameter		1.5mm ²	1.5mm ²	1.5mm ²
Voltage		110V	230V	277V
Power	QTY			
20W		49pcs	103pcs	124pcs
25W		39pcs	82pcs	99pcs
30W		33pcs	69pcs	83pcs
50W		19pcs	41pcs	49pcs
60W		16pcs	34pcs	41pcs

Independent version

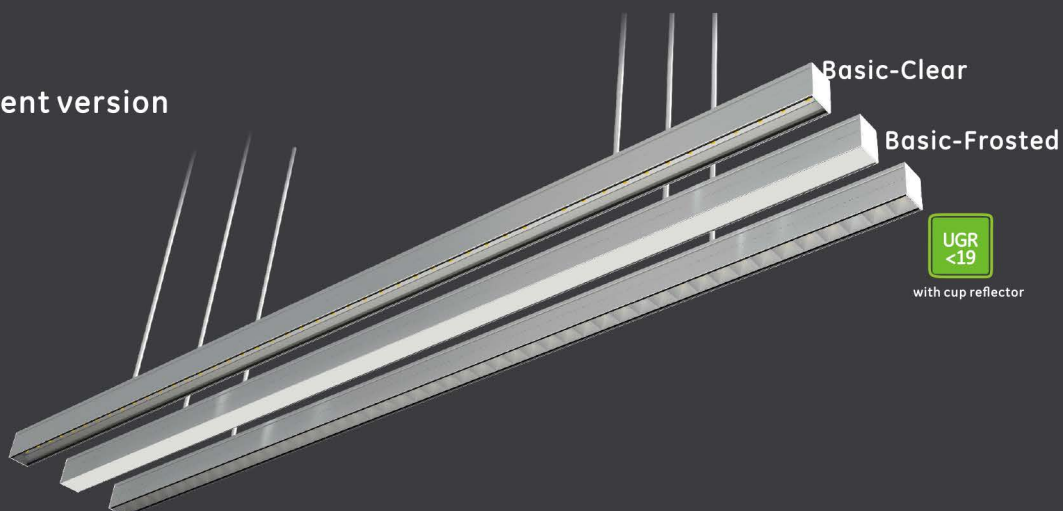

Basic



CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 50000Hrs



Parameter							
Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC	
249-0007	1200	25	3250	Epistar2835	110°	Frosted	
249-0008	1200	50	6500	Epistar2835	110°	Frosted	
249-0009	1500	30	3900	Epistar2835	110°	Frosted	
249-0010	1500	60	7800	Epistar2835	110°	Frosted	

UGR<19


CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 90000Hrs




Parameter							
Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC	
249-0011	1200	20	2400	Samsung3030	80°	Clear	
249-0012	1500	25	3000	Samsung3030	80°	Clear	

Installation


Surface mounted (clips)

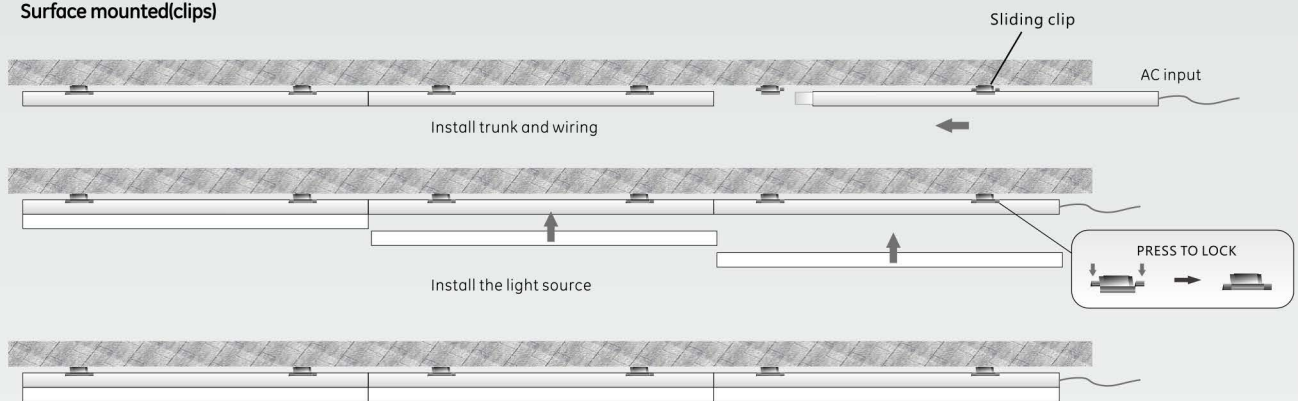

Surface mounted (screw)

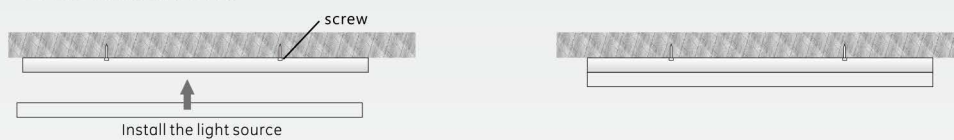

Suspending

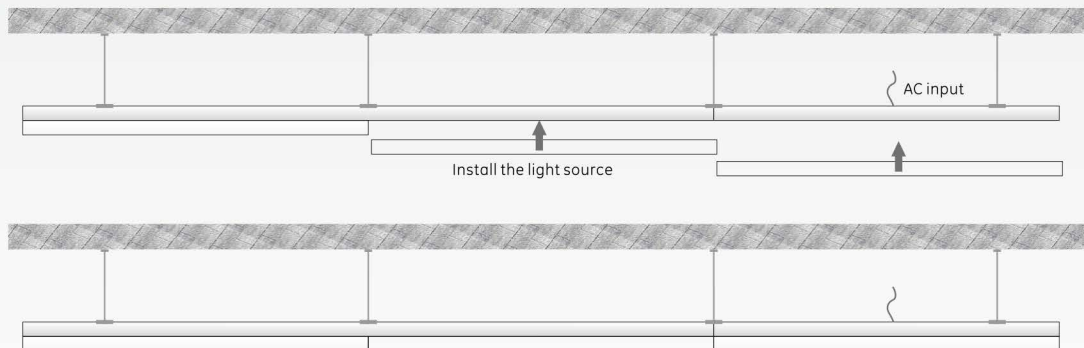

Recessed



About us

11 YEARS LED Experience

Zhengzhou Inledco Lighting Co., LTD, located in Zhengzhou city, Henan Province, China, is a leading LED lights manufacturer with professional R&D teams. We started researching and designing LED lights from 2006 and have been exporting 100% of our products to North America and Europe ever since. We are committed to innovation and development of LED lights. Several series of innovative products have been developed and patented, some of which are even leading the trend in the market.

Zhengzhou inledco Lighting Co., LTD
Add: High Technology Development Zone, Zhengzhou Henan China
Tel: +86-371-86549719
Postcode: 450000
E-mail: info@ledinpro.com
Website: www.ledinpro.com