


Trunk Go Flex/LL249 Slim LED Trunking & Linear Light




Type

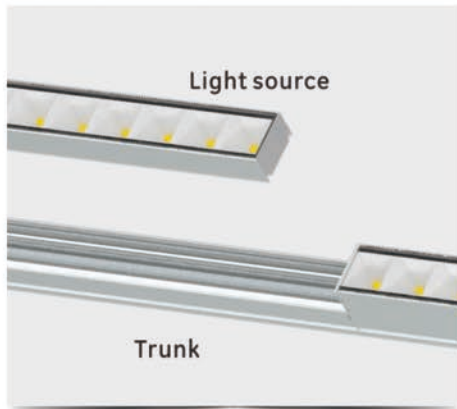

Trunking




UGR<19(80°)

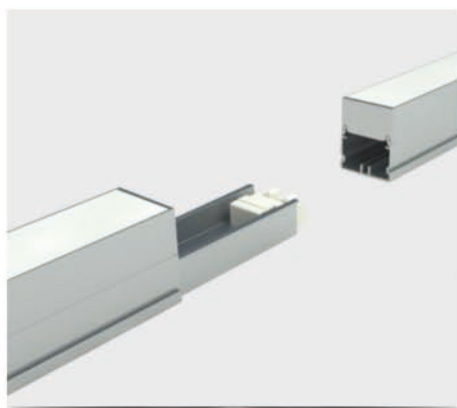

Linkable




Independent

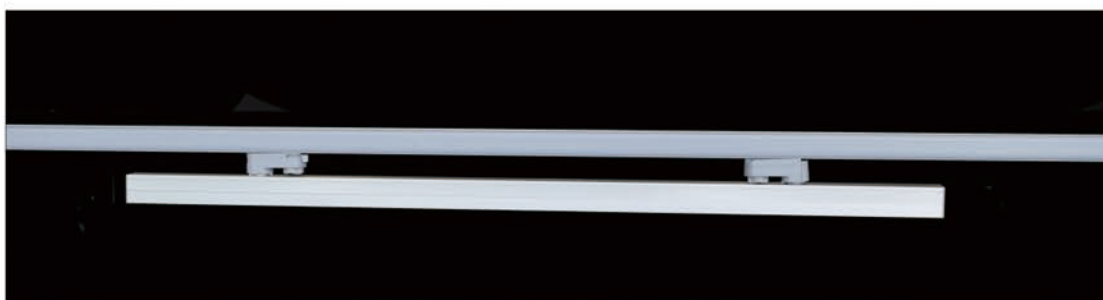


Track Linear Light




Interconnection



"L" type






"T" type




"X" type

Power entry

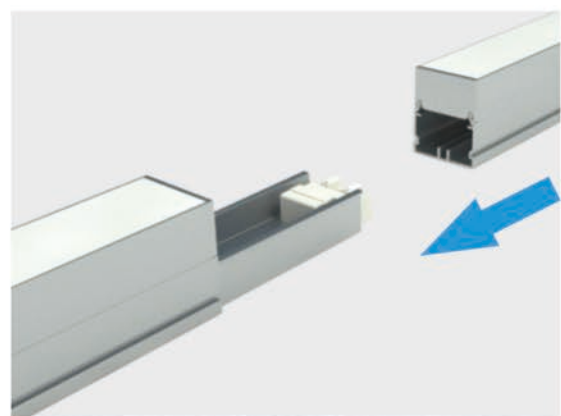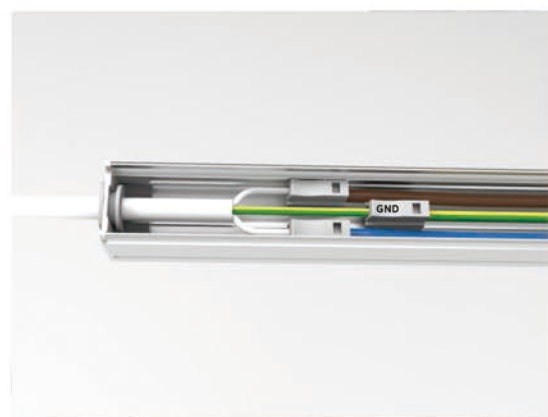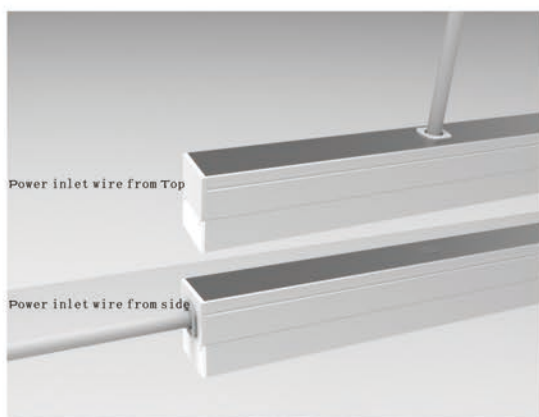


Linkable version

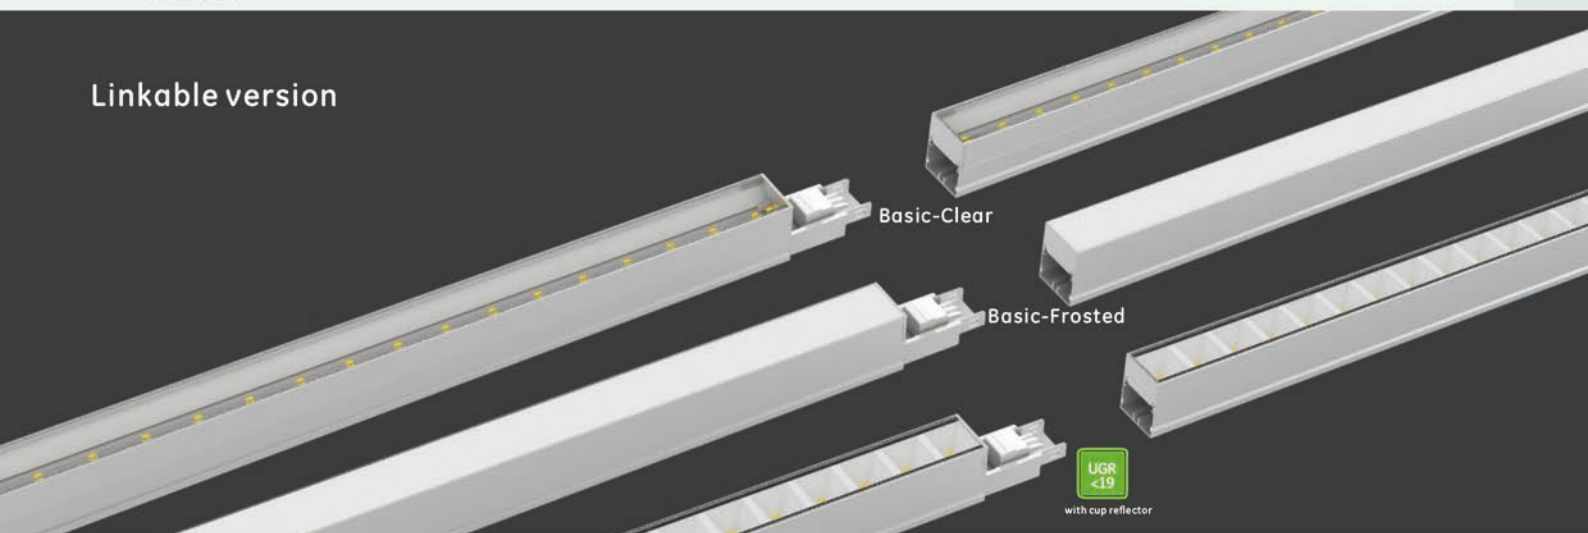

Basic

CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 50000Hrs




Parameter

Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC
249-0001	1200	25	3250	Epistar2835	110°	Frosted
249-0002	1200	50	6500	Epistar2835	110°	Frosted
249-0003	1500	30	3900	Epistar2835	110°	Frosted
249-0004	1500	60	7800	Epistar2835	110°	Frosted
249-0026	1200	18	2340	Epistar2835	110°	Frosted

UGR<19

CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 90000Hrs




Parameter

Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC
249-0005	1200	20	2400	Samsung3030	80°	Clear
249-0006	1500	25	3000	Samsung3030	80°	Clear

MAXIMUM INTERCONNECTION QTY

Wire Diameter	1.5mm ²	1.5mm ²	1.5mm ²
Voltage	110V	230V	277V
Power QTY	20W	49pcs	103pcs
	25W	39pcs	82pcs
	30W	33pcs	69pcs
	50W	19pcs	41pcs
	60W	16pcs	34pcs


Independent version

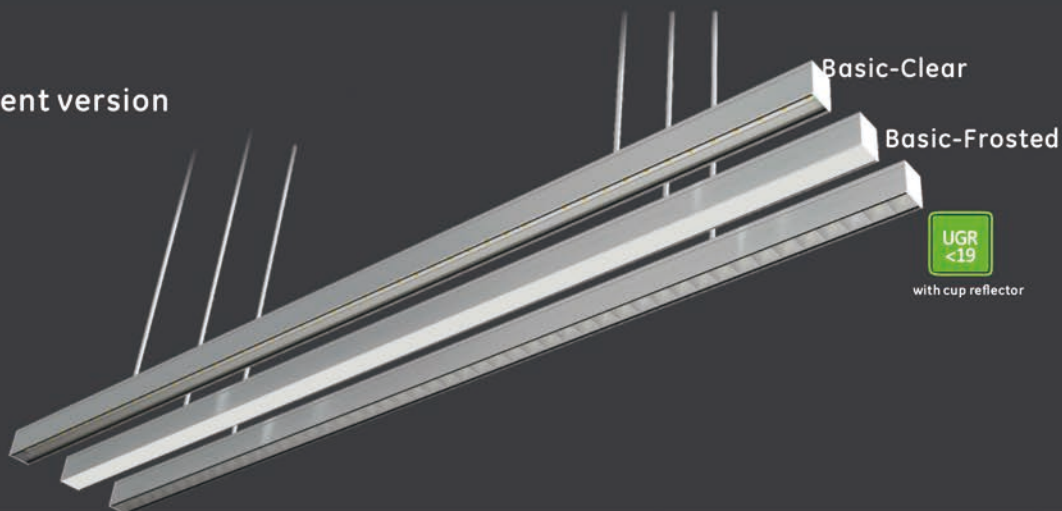

Independent version

Basic

CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 50000Hrs




Parameter

Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC
249-0019	1200	25	3250	Epistar2835	110°	Frosted
249-0020	1200	50	6500	Epistar2835	110°	Frosted
249-0021	1500	30	3900	Epistar2835	110°	Frosted
249-0022	1500	60	7800	Epistar2835	110°	Frosted

UGR<19


CHARACTERISTICS			
Input Voltage 100-277VAC		CCT(K) 3000/4000/5000/6500	
THD <15%	PF >0.9	Cover PC	Lifespan 90000Hrs



Parameter

Type No.	Length (mm)	Wattage (W)	Lumen (lm)	LED	Beam Angle	PC
249-0023	1200	20	2400	Samsung3030	80°	Clear
249-0024	1500	25	3000	Samsung3030	80°	Clear

Independent version

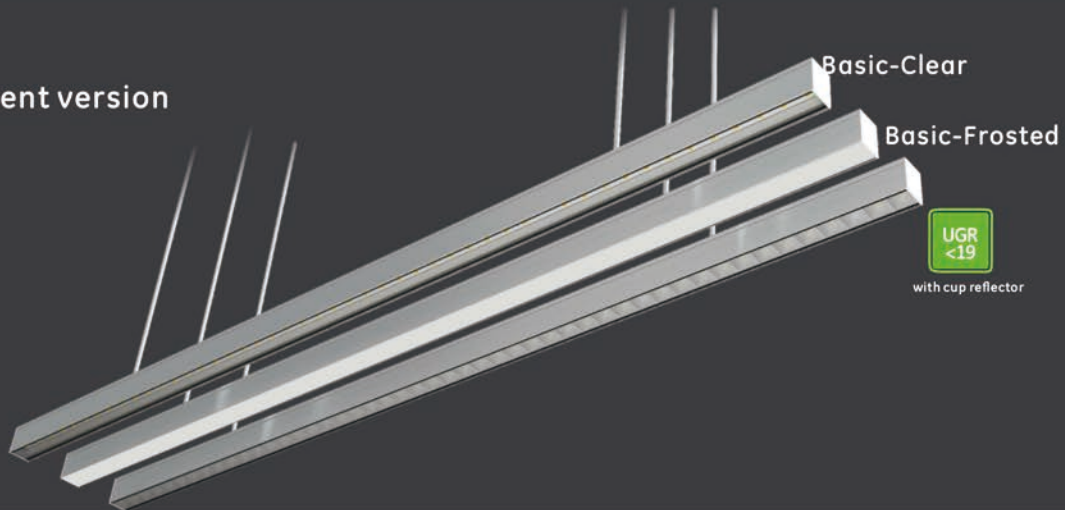

Accessories




Surface mounted clip



Suspending clip






Power entry module (for 1st light)

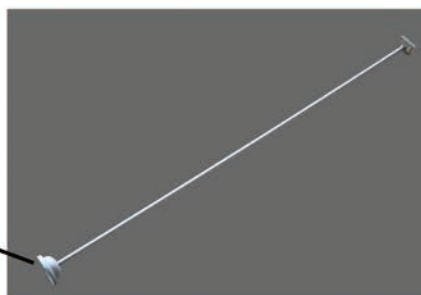

Suspender




Interconnected accessories

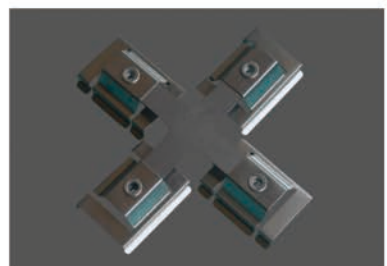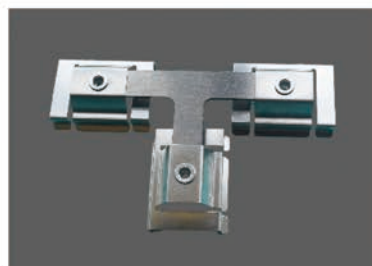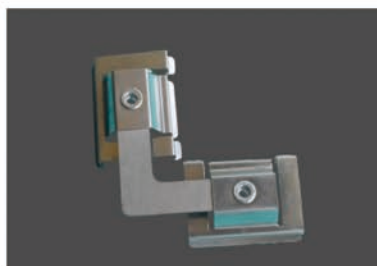


Installation


Surface mounted(sliding clips)

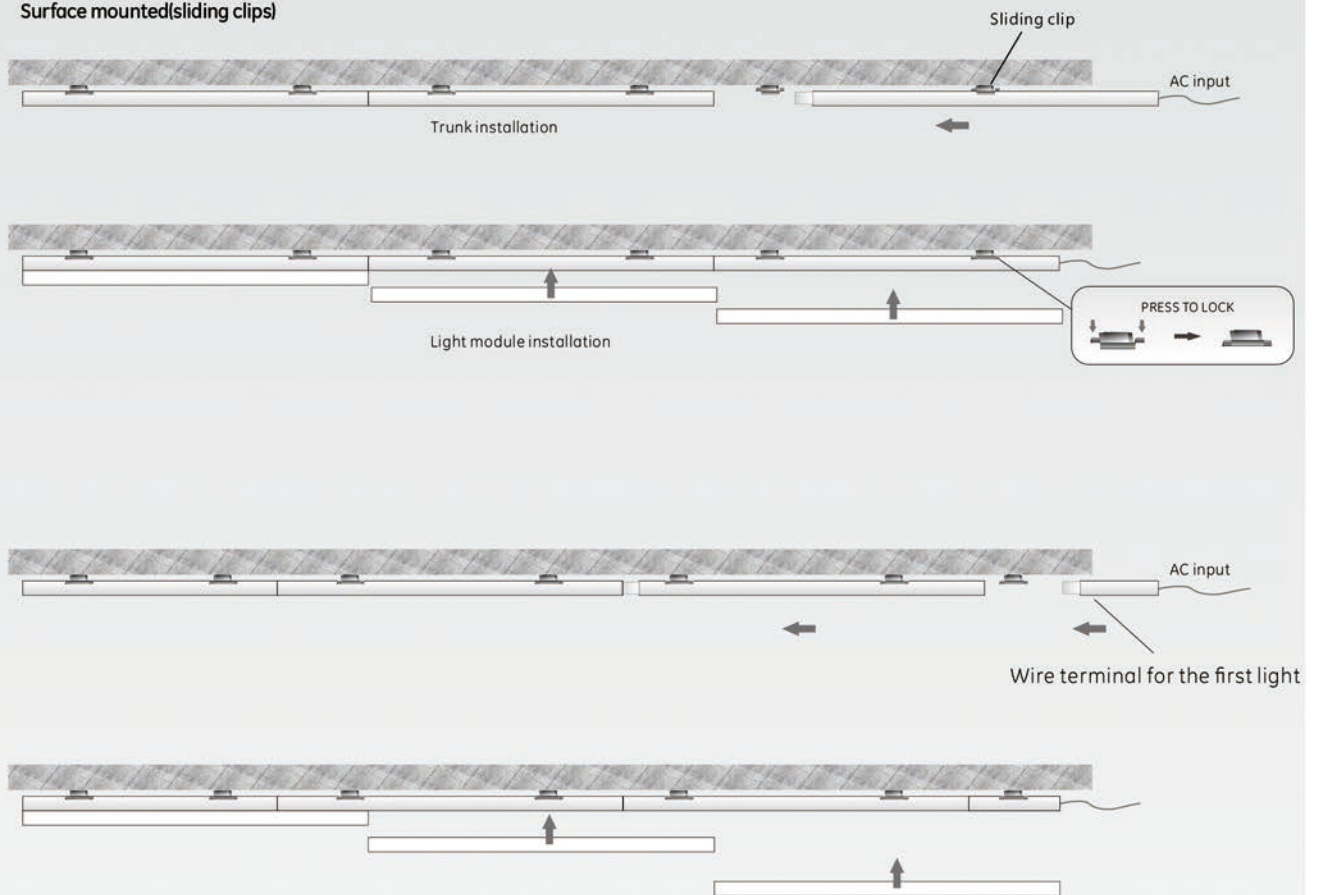

Surface mounted (screw)

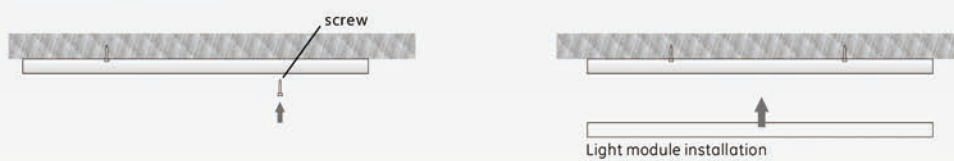


Suspending

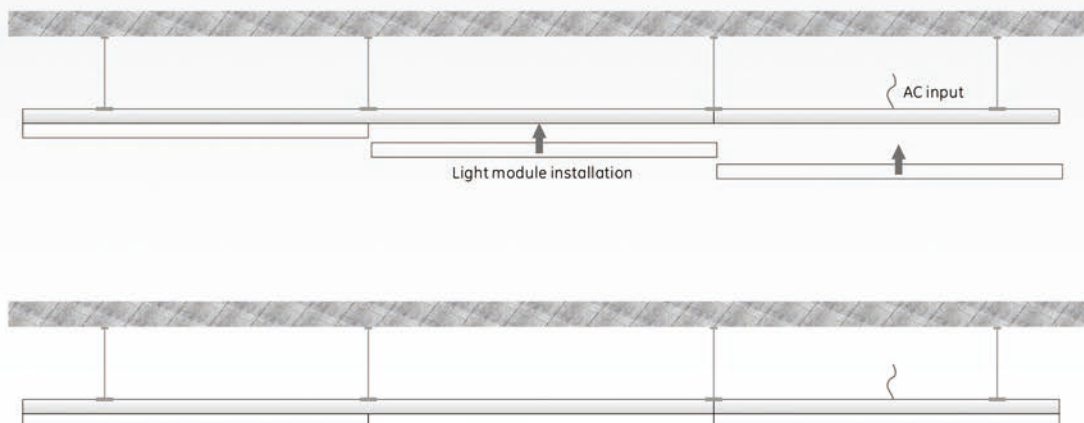


Installation

Independent version

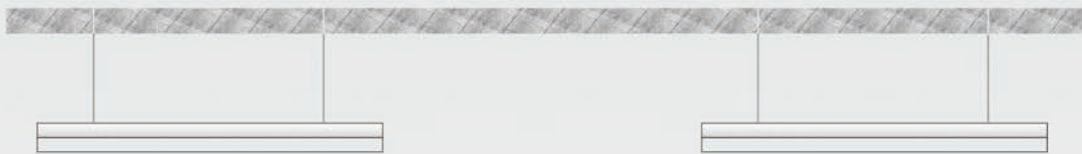

Recessed

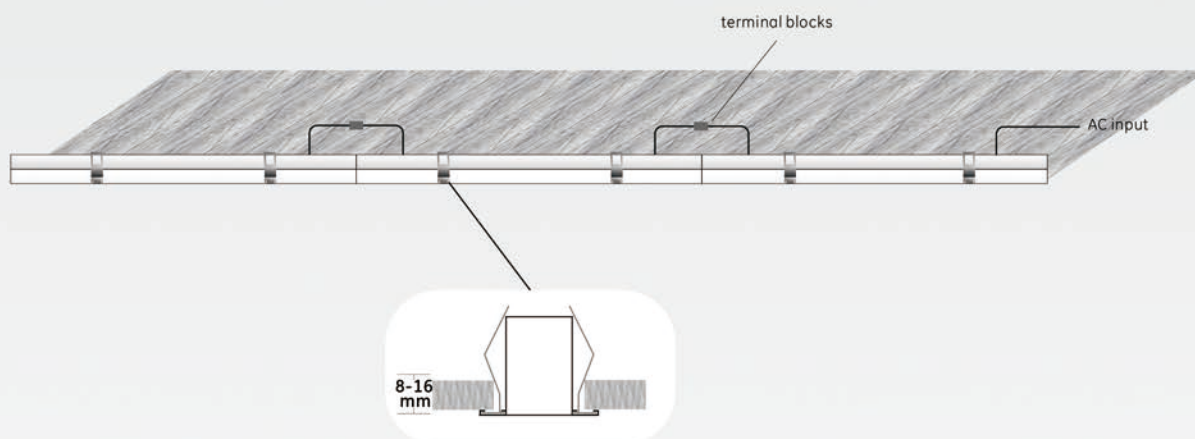

About us

11 YEARS LED Experience

Zhengzhou Inledco Lighting Co., LTD , located in Zhengzhou city, Henan Province, China, is a leading LED lights manufacturer with professional R&D teams. We started researching and designing LED lights from 2006 and have been exporting 100% of our products to North America and Europe ever since.

We are committed to innovation and development of LED lights. Several series of innovative products have been developed and patented, some of which are even leading the trend in the market .

 **Zhengzhou inledco Lighting Co., LTD**
Add: High Technology Development Zone,Zhengzhou Henan China
Tel: +86-0371-86549719
Postcode: 450000
E- mail: info@ledinpro.com
Website: www.ledinpro.com