




SUPER
Your Trusted Partner

SUPER RS 2

**SEMI AUTOMATIC
ROTOR SPINNING MACHINE**

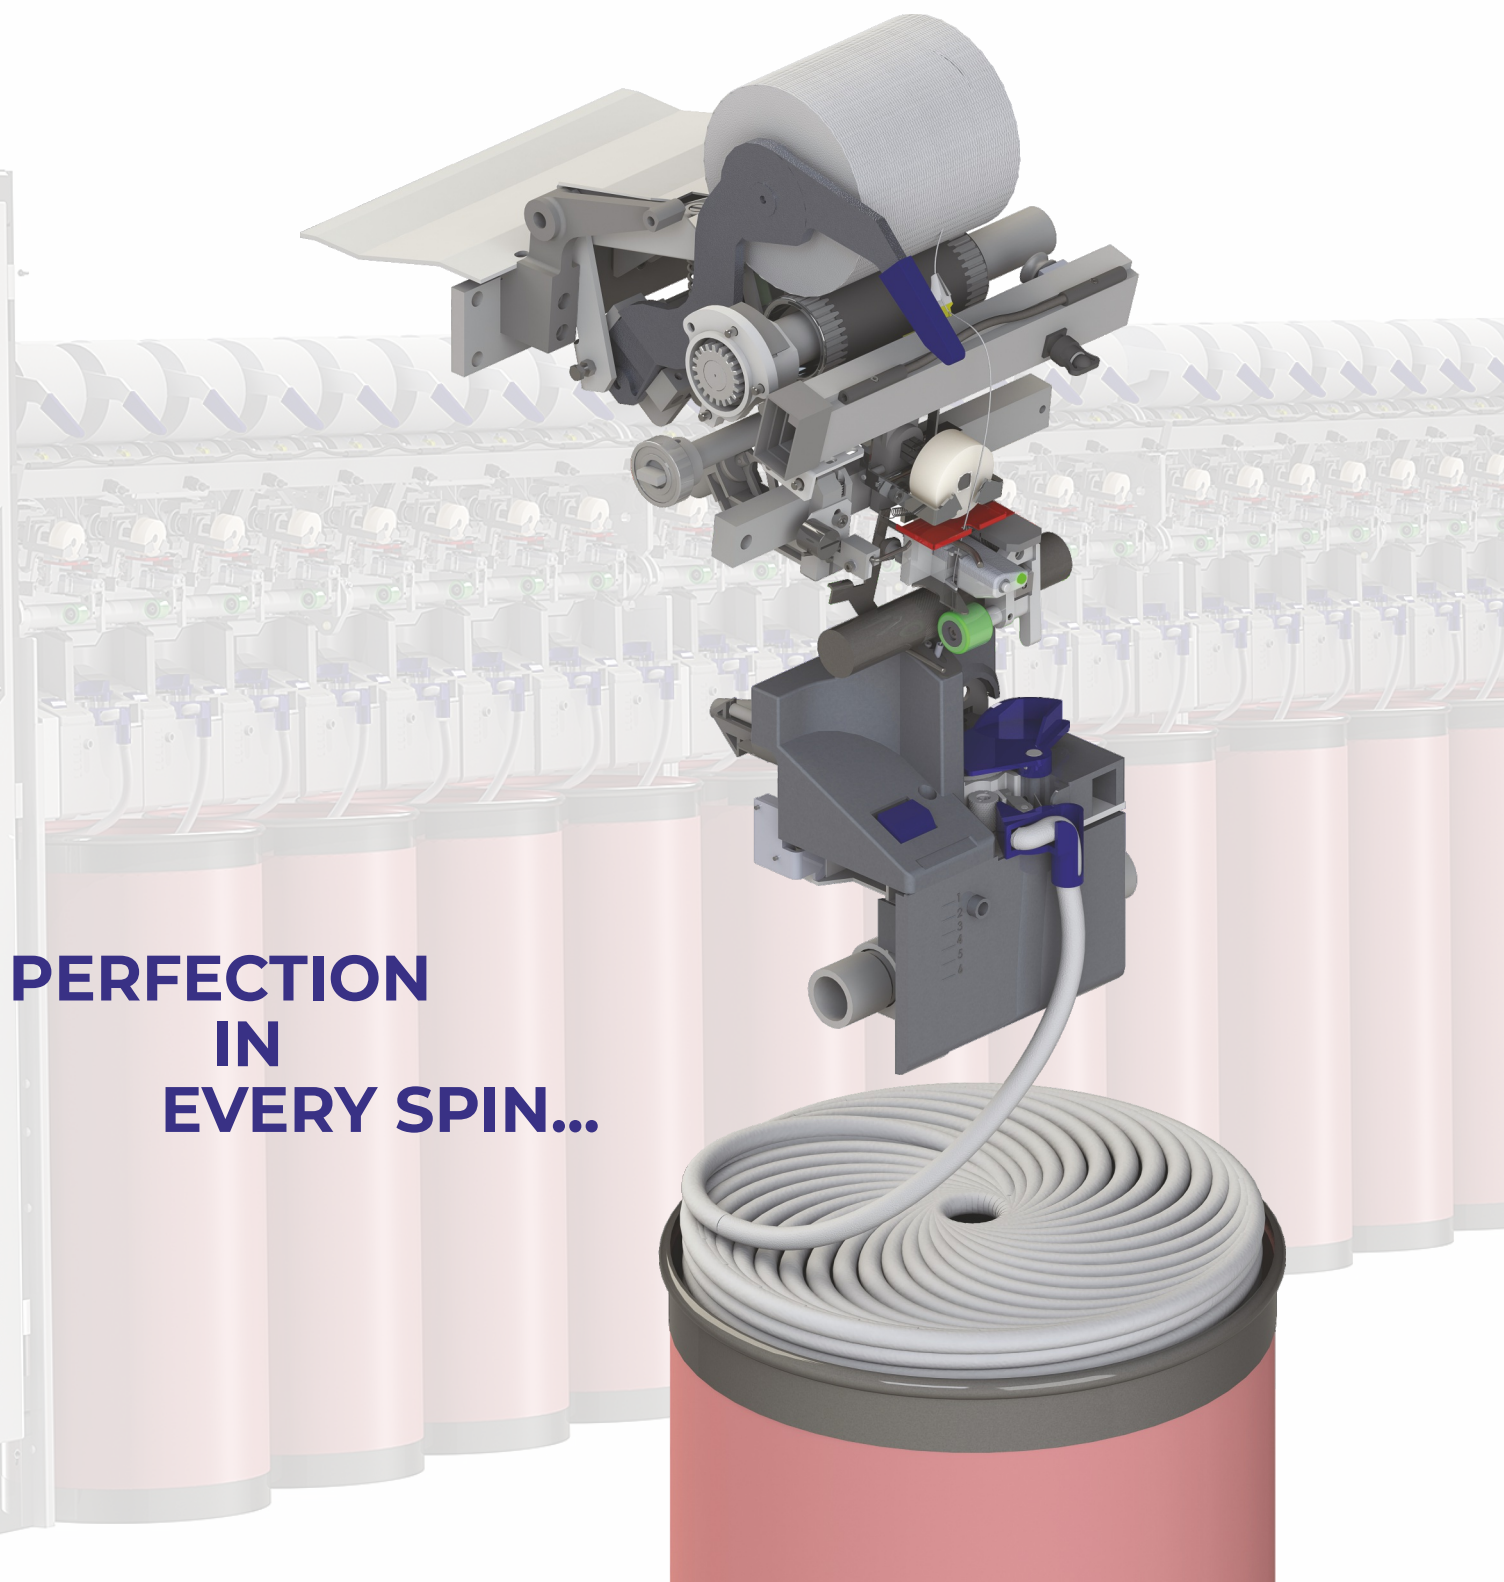

**PERFECTION
IN
EVERY SPIN...**




ABOUT US

Super Group as it stands today, was started way back in 1984 with a vision to become one of the most advanced machinery manufacturer in the field of Textile and General Engineering.

Our successful technological advancement in the manufacturing of Sliver and Apparel yarn machines for more than two decades, has motivated us towards the development and manufacture of highly advanced Open End Rotor Spinning Machine, SUPER RS2 to target the global markets.

We are an extremely motivated team, having top quality infrastructure, to meet out all the requirements from Research and Development, and maintaining High Quality / Production Standards and excelling in Customer Service.

WORKING EXCELLENCE

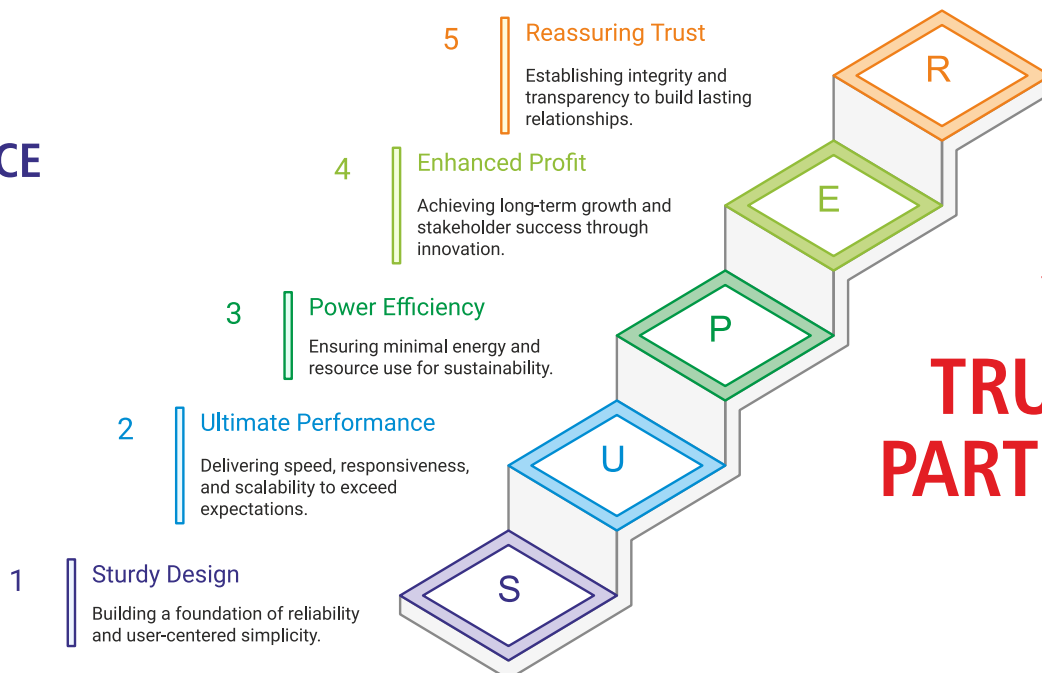


**YOUR
TRUSTED
PARTNER**

@ THE HEART OF SPINNING


SPIN BOX



- Totally Indigenously Manufactured In House with the latest Systems.
- Spin Box Parts can be easily mounted and removed without the need for any special Tools
- Simplistic Design reduces the machine down times and enables effective utilization of Manpower.
- Independent Stepper Drive Control for Feed Sliver Intake

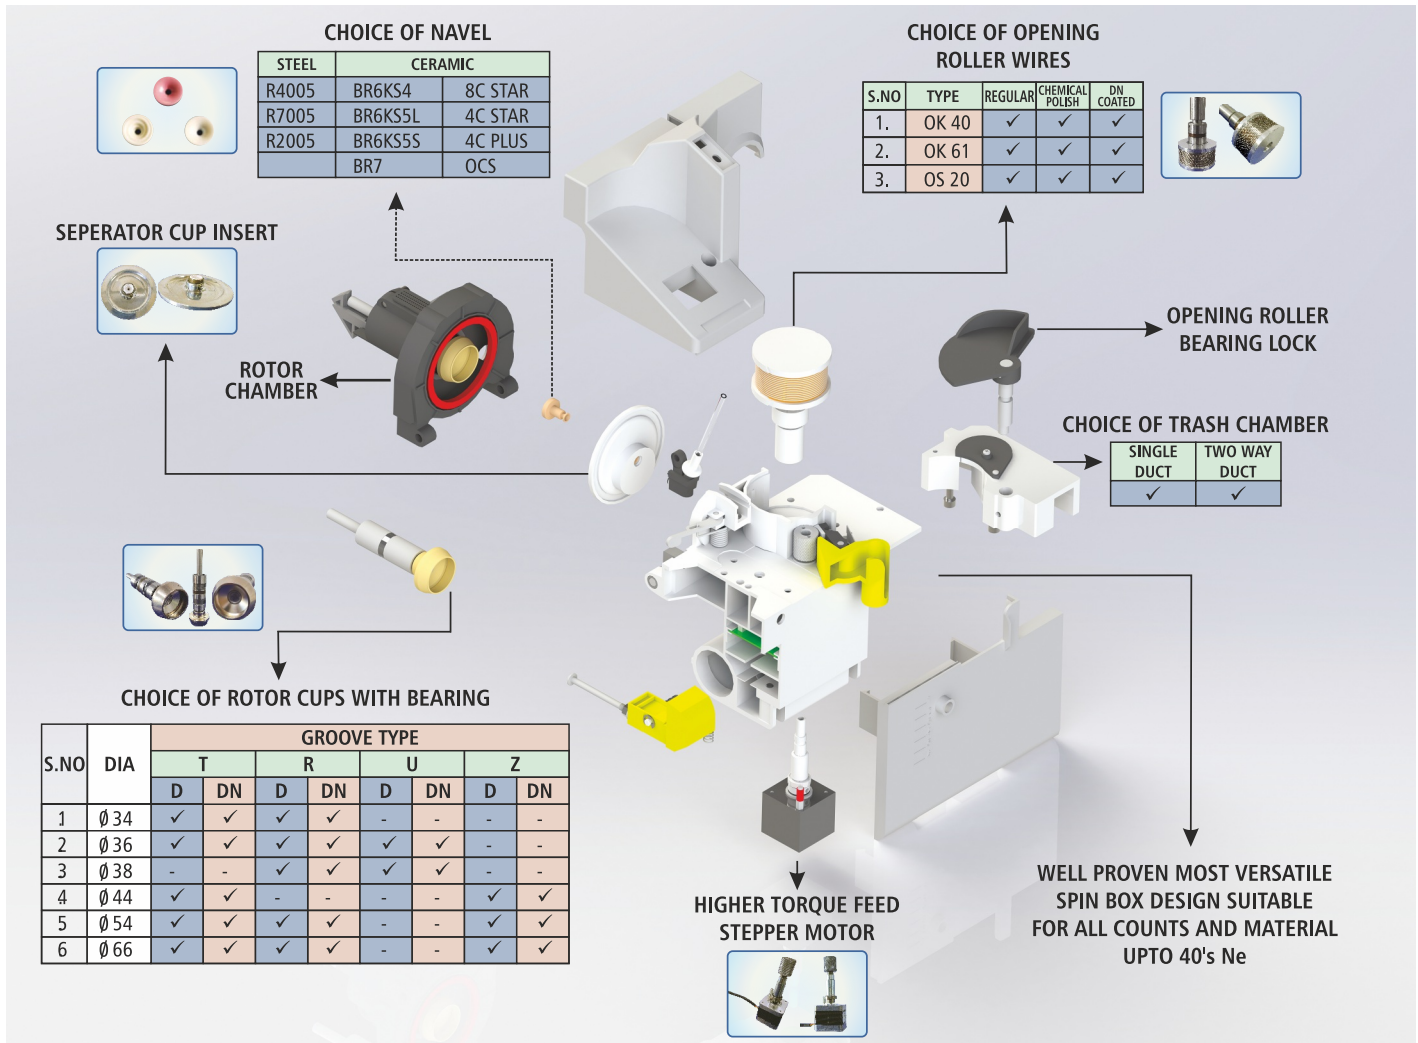

Super **R3 Z** - S3 Digital Piecing System

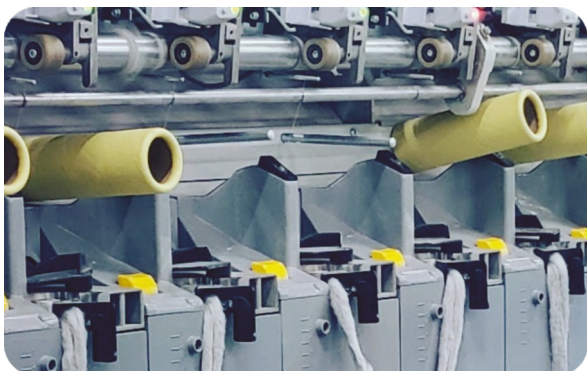


S3 Start-Stop-Spin

- Each spinning position is equipped with digital piecing technology, which enables quicker piecing.
- The perfect combination of sliver feed and package Lift-Drop mechanism with intelligent control ensures consistency of positive piecing and quality.




SUPER RS 2

EASILY ACCESSIBLE
ELECTRICAL PANEL SYSTEM




TWIN E-CAM SYSTEM




YARN PACKAGE WITH
SELECTABLE WINDING ANGLE



DUAL CONVEYOR DRIVE SYSTEM



MAXIMUM HEIGHT
OF CANS UPTO 42"




IMPROVED SHOCK ABSORBING
ROTOR BELT TENSION BRACKET



SPINBOX WITH DIGITAL
PIECING SYSTEM



WIPER CLEANING SYSTEM
FOR FILTER SCREEN



THIRD HAND SUCTION
DRIVE SYSTEM



**OPTIONAL YARN
CLEARER ATTACHMENT**




**OPTIONAL WAX
ATTACHMENT**



**YARN PACKAGE WITH
SELECTABLE WINDING ANGLE**

QUICKER PAYBACK WITH SUPER RS2

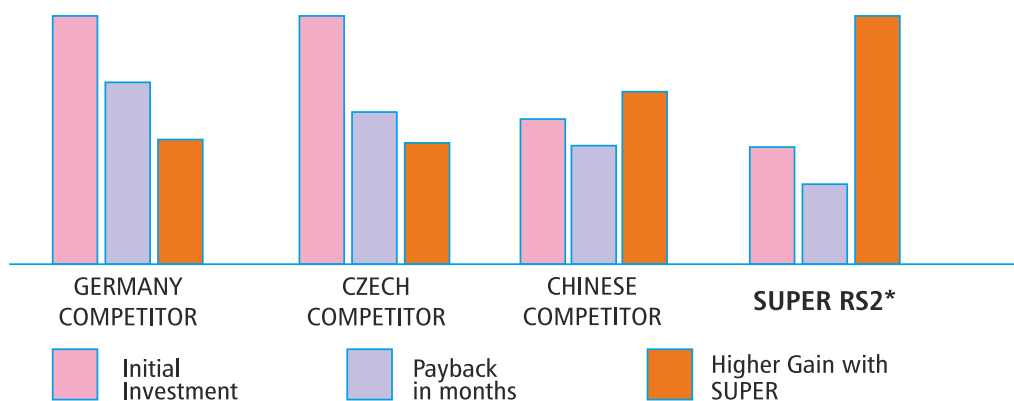

SUPER RS 2




SUPER
Your Trusted Partner

DSDC Technology

(Dual Side Dual Count Processing)

- Highly versatile with optimum machine utilization.
- DSDC enables to spin two different lots simultaneously on two sides of the machine.
- Better suitable according to current market demand.
- Lot changes are faster with separate controls on either sides for rotor drive, opening roller drive, set twist multiplier with individuals package conveyor belts.

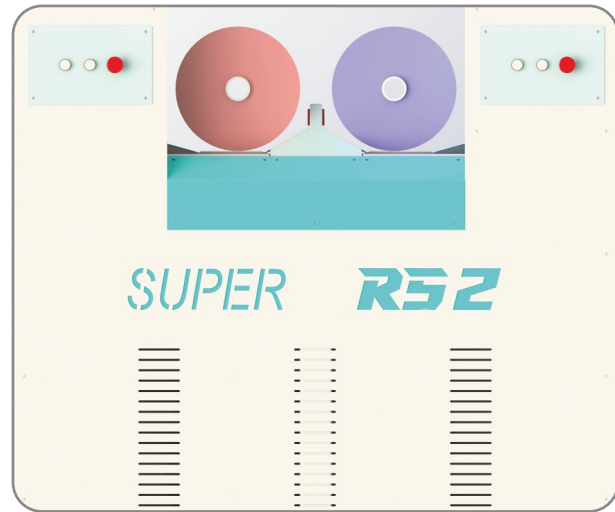


I-JS System (Individual Joint Spinning)

- Individual digital joint-spinning technology is incorporated separately for either side.
- I-JS Parameters can be set according to individual counts, Rotor speed and Yarn twist multiplier (tm).


Super Four-Way Technology Air Suction

- Improves suction efficiency and reduces power consumption.

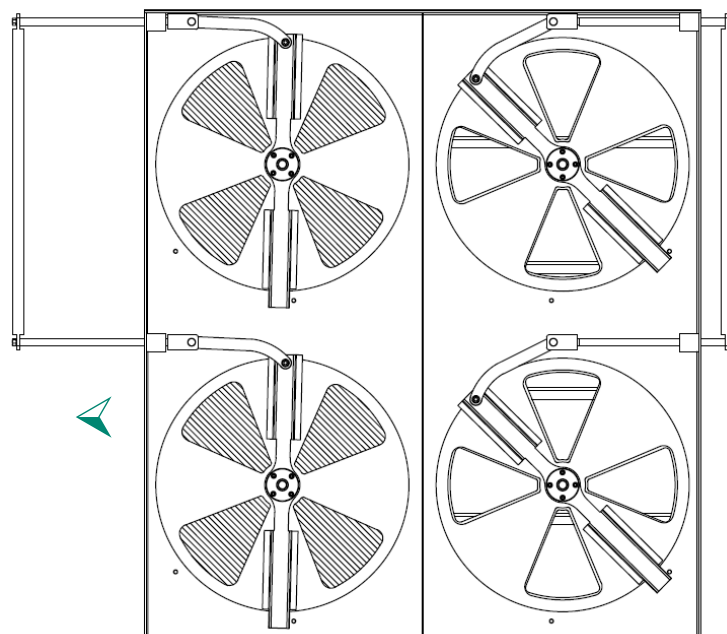

*patent applied

SUPER RS 2 FLOOR PLAN

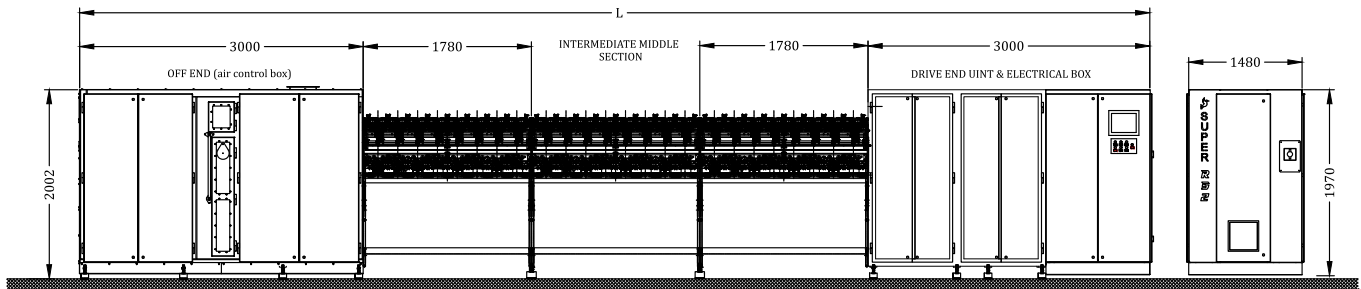

No. of sections / Rotors	15/240	20/320	25/400	30/480	32/512
Length in feet / Meters	107.3/32.7	136.5/41.6	165.7/50.5	194.8/59.4	206.6/63

Technical Data

- ★ Yarn Count Range - 1 Ne to 40s Ne
- ★ Sliver Feed 0.08 Ne - 0.20 Ne
- ★ Fibre length upto 45 mm
- ★ Draft Range from 40 - 300
- ★ Maximum Rotor RPM upto 1,05,000.00
- ★ Rotor Diameter size from 32 to 66mm
- ★ Feed sliver Entry speed upto 14 m / Min
- ★ Yarn Winding Take up speed
 - a. Cheese Winding upto 180 M / Min
- ★ Yarn Traverse Length - 150mm
- ★ Winding Angle - 30° to 40° adjustable through the touch screen.
- ★ Winding package size
 - a. Cheese Head Upto 3.5 kg and 300mm diameter
- ★ Winding Tube Size
 - a. Diameter - 40, 44, 50, 54.
 - b. Length - 170mm
- ★ Power Consumption Data will vary according to Total No. of Rotors

Salient Features

- ★ Maximum No. of Rotors - 512 Rotors (16 Rotors / Section)
Maximum No. of sections up to 32
- ★ Rotor Spindle Gauge - 210mm
- ★ Piecing parameters, Rotor Speed, Technological Air pressure setting, Take up speed, Winding parameters are all controlled by Touch Screen HMI
- ★ Dual conveyor belt provided for removing packages
- ★ Special Diamond Coating and DN Coating and Chemical Treatments are available as option for Opening Rollers and Rotor Cups.
- ★ Ceramic inserts with smooth, spiral and notched navels are available for special application.
- ★ Length measurement is incorporated for producing Yarn Packages with Specific Yarn Lengths
- ★ Technology Air Suction chamber waste is Automatically cleared by separate wiper.
- ★ Yarn Traverse Guide - Through Servo "E" Cam Motion, infinitely variable offset upto 4mm
- ★ Electrical Joint Spinning system is provided for controlling Yarn breakages during a Power failure.
- ★ Feed cans which can be accommodated.
Dia : upto 16", Height : Maximum 42"



SUPER
Your Trusted Partner

Our Logo epitomizes our working culture

* The white Dove represents peace and harmony in the industry

* The green background represents a clean and healthy environment

Super Machine Works Private Limited.,

100, Athipalayam Road, Chinnavedampatti
Coimbatore - 641 049. Tamil Nadu, India

Phone : +91 422 2666786, 4274332

Mobile : +91 99429 09628, 99429 09629

E-mail : info@supergroupscbe.com

sales@supergroupscbe.com

Spares : spares@supergroupscbe.com

Website : www.supergroupscbe.com

Let's get connected
and grow together



Scan and Save