

8315955
8315956



SEE NOTE 1. POSITION ON COMMON
FACE OF HANDRAIL TO BE MAINTAINED
WHEN CHANGING HANDRAILS.

BREAK ALL SHARP CORNERS
UNLESS OTHERWISE SPECIFIED.

COUNTERSINK ALL TAPPED
HOLES 116° X ONE THR'D DEEP.

SURFACE FINISH SPEC. IS IN
ACCORDANCE WITH G.M. ENGR. STDS.

FOR DIMENSIONAL TOLERANCES
NOT SPECIFIED SEE A.I. 2100.

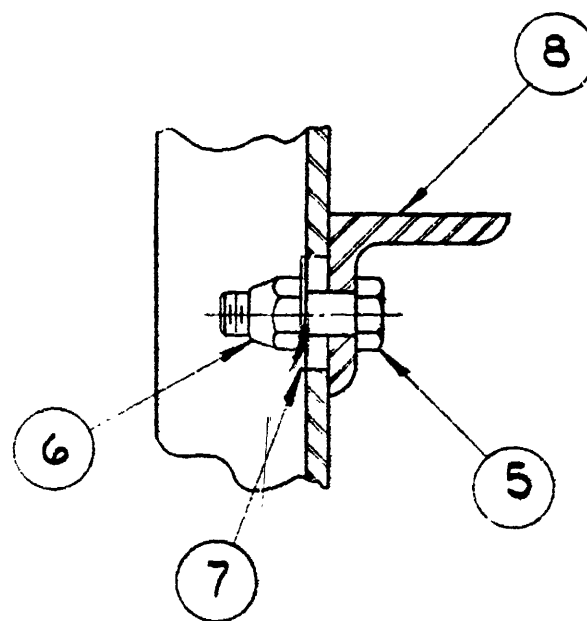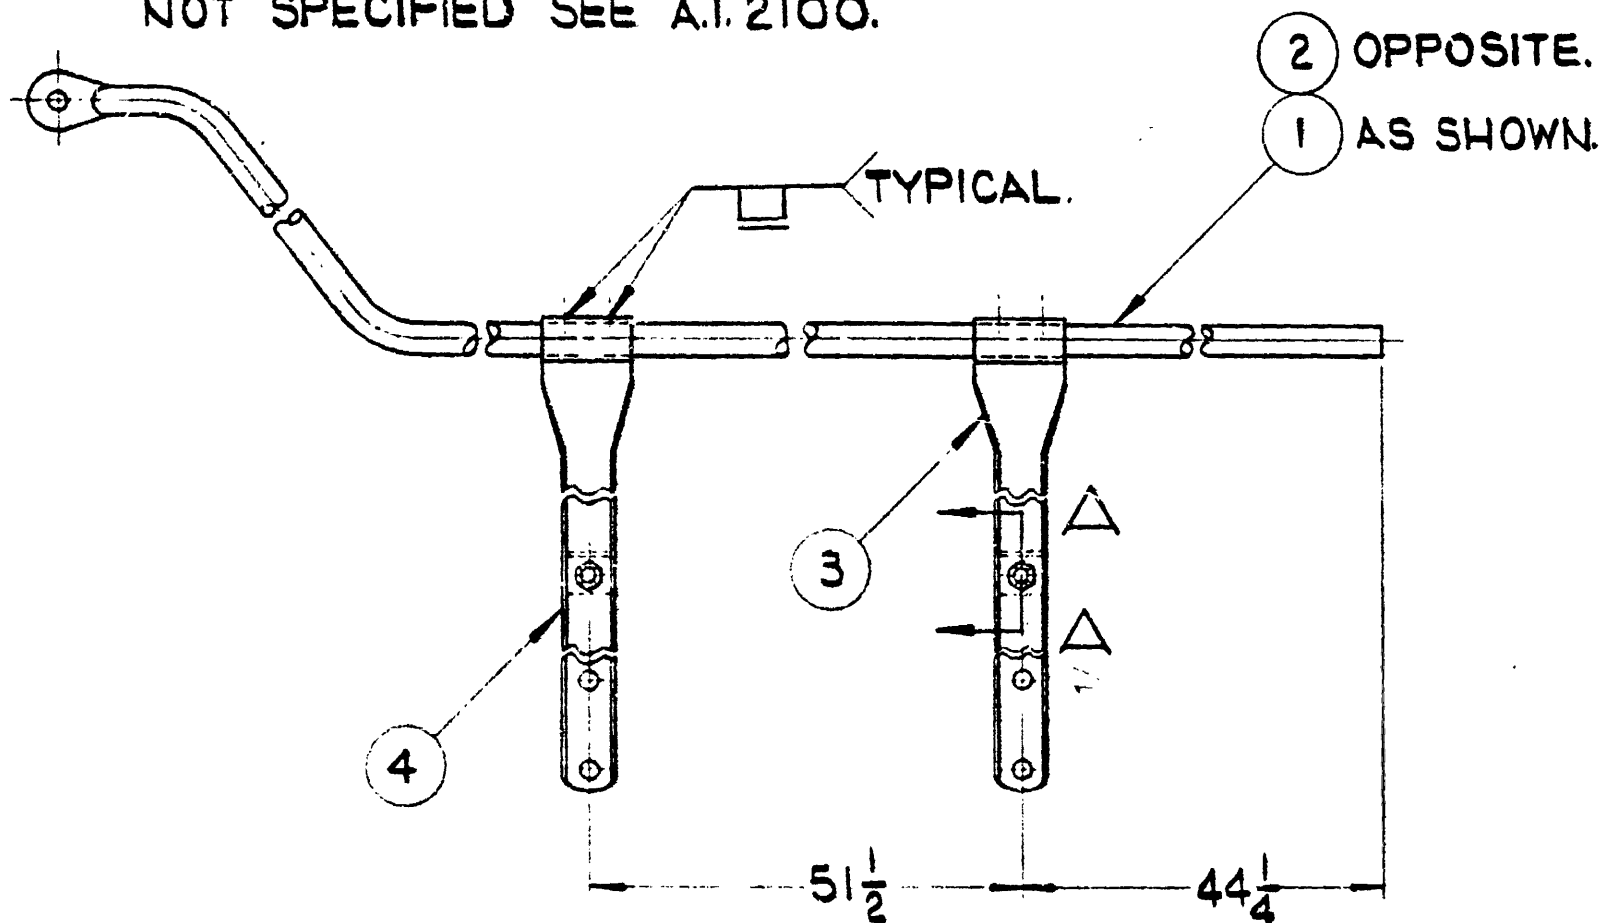

SECTION A-A

8315955-SHOWN
8315956-OPPOSITE HAND

2		ANGLE	8192934	8
2		WASHER - 1/2 PLAIN	103343	7
2		NUT - 1/2-13 LOCK	442817	6
2		BOLT - 1/2-13 HEX. HD.	179885	5
1		SUPPORT-HANDRAIL	8304787	4
1		SUPPORT-HANDRAIL	8313798	3
1	OPPOSITE	HANDRAIL	8304702	2
1	AS SHOWN	HANDRAIL	8304701	1

R. F. C. NO.	REV. LET.	REVISION	DATE	BY	CK.	APV'D.

R. F. C. NO.	REV. LET.	REVISION	DATE	BY	CK.	APV'D.
FIRST USED ON		GP-30				

NO. REQUIRED PER ASSEMBLY	MATERIAL		NAME OF PART		PART NO.	IT. NO.
	DR.	DATE	ELECTRO-MOTIVE DIVISION			
	CK.		GENERAL MOTORS CORPORATION			
			LA GRANGE, ILLINOIS, U.S.A.			
CH. CK.	SUP.		HANDRAIL ASSEMBLY			
WRO.	CH. DR.		DATE OF PRINT		PART NO.	
MAT'L	ENGR.					