
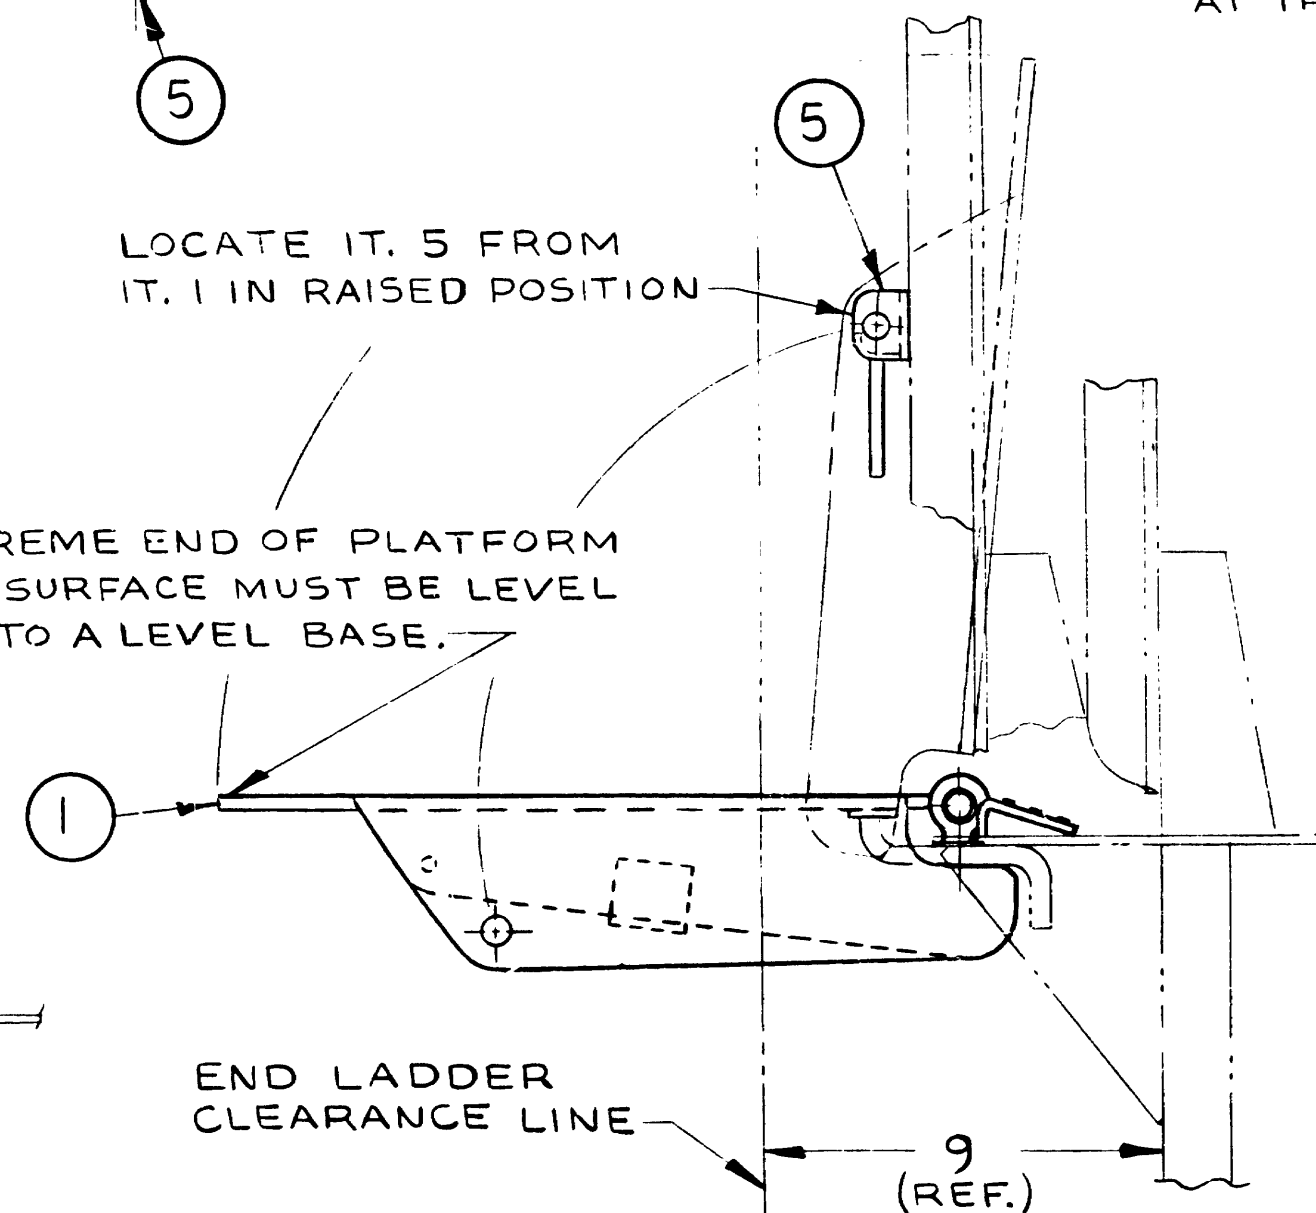
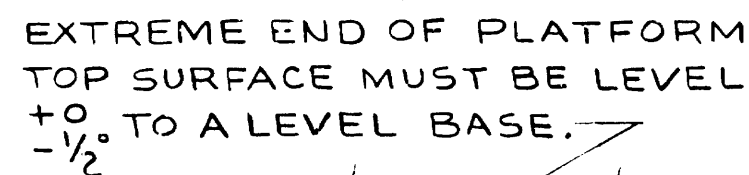



SURFACE FINISH SPECS IS IN ACCORDANCE WITH G M. ENGR. STDS.

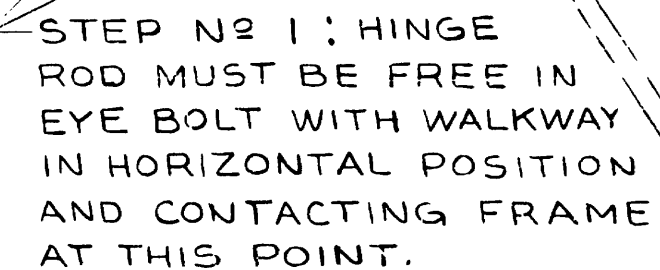

PROCEDURE OF APPLIC. AT FINAL ASM.
STEP NO 1 - MAKE CONTACT AT POINT
AS NOTED.

STEP NO 2 - ADD REQ'D. SHIMS TO BRING WALKWAY LEVEL - REF. IT'S. 6, 7 & 8.

STEP NO 3 - MEASURE GAP BETWEEN ϕ OF ROD AND TOP OF SUPPORT. ADD REQ'D. WASHERS (IT. 11) TO PROVIDE A MIN. GAP OF $\frac{3}{32}$ " BETWEEN TOP OF ROD AND TOP OF HOLES IN EYE BOLT.

[illegible]