



SECTION V-V

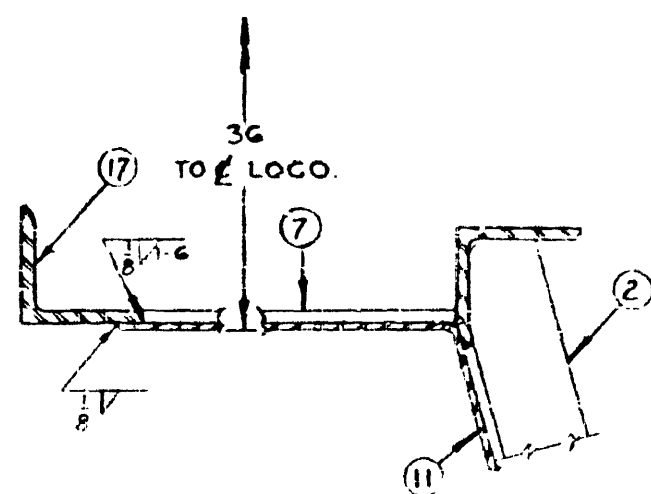



SECTION W-W

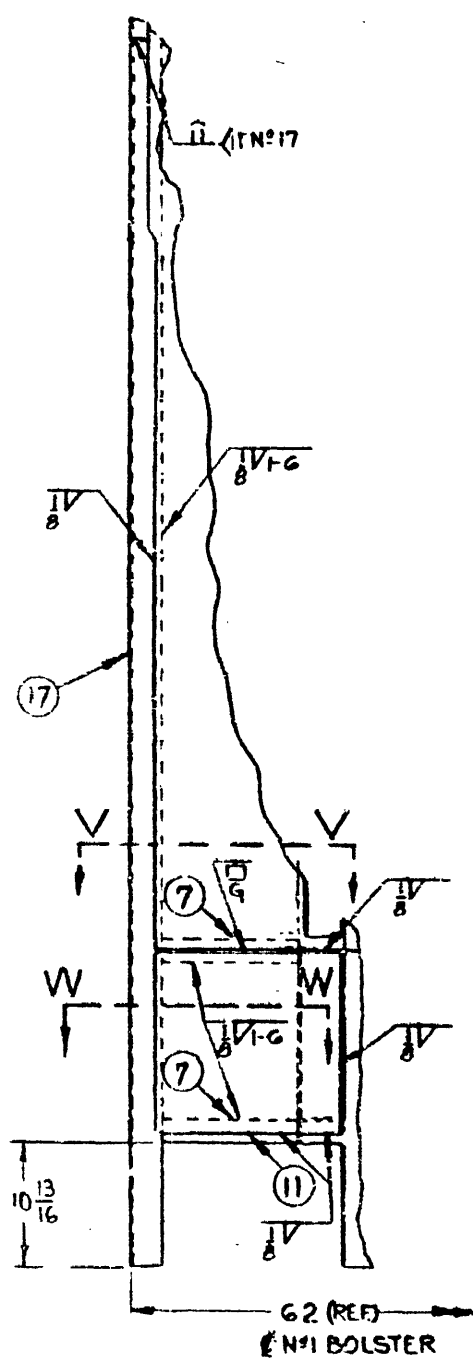


VIEW N-N

QTY	DESCRIPTION	PART NO.	QTY
1	ANGLE ASSEMBLY	8314831	20
2	STRIP	8373022	19
1	SHEET	8313993	18
1	ANGLE	8313990	17
1	ANGLE ASSEMBLY	8313988	16
1	ANGLE	8313979	15
1	ANGLE	8313980	14
1	ANGLE	8313987	13
1	ANGLE	8313981	12
1	SHEET	8314188	11
1	SHEET	8313993	10
1	BRACKET	8313441	9
2	DOOR CATCH HOUSING	8159373	8
2	STRIP	8323825	7
1	STRIP - CLOSING	8313940	6
1	STRIP - CLOSING	8313939	5
2	FILLER	8137440	4
1	HOOD ASSEMBLY	8313771	3
1	SUB-BASE ASSEMBLY	8313698	2
1	CAN STRUCTURE ASSEMBLY	8314310	1


ELECTRO-MOTIVE DIVISION CENTRAL MOTOR CORPORATION LA FAYETTE, ALABAMA, U.S.A.	
CAB SHORT HOOD & SUB-BASE ASSEMBLY	
8314066	

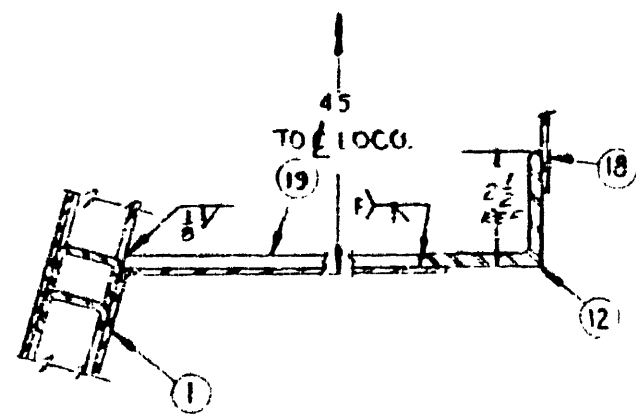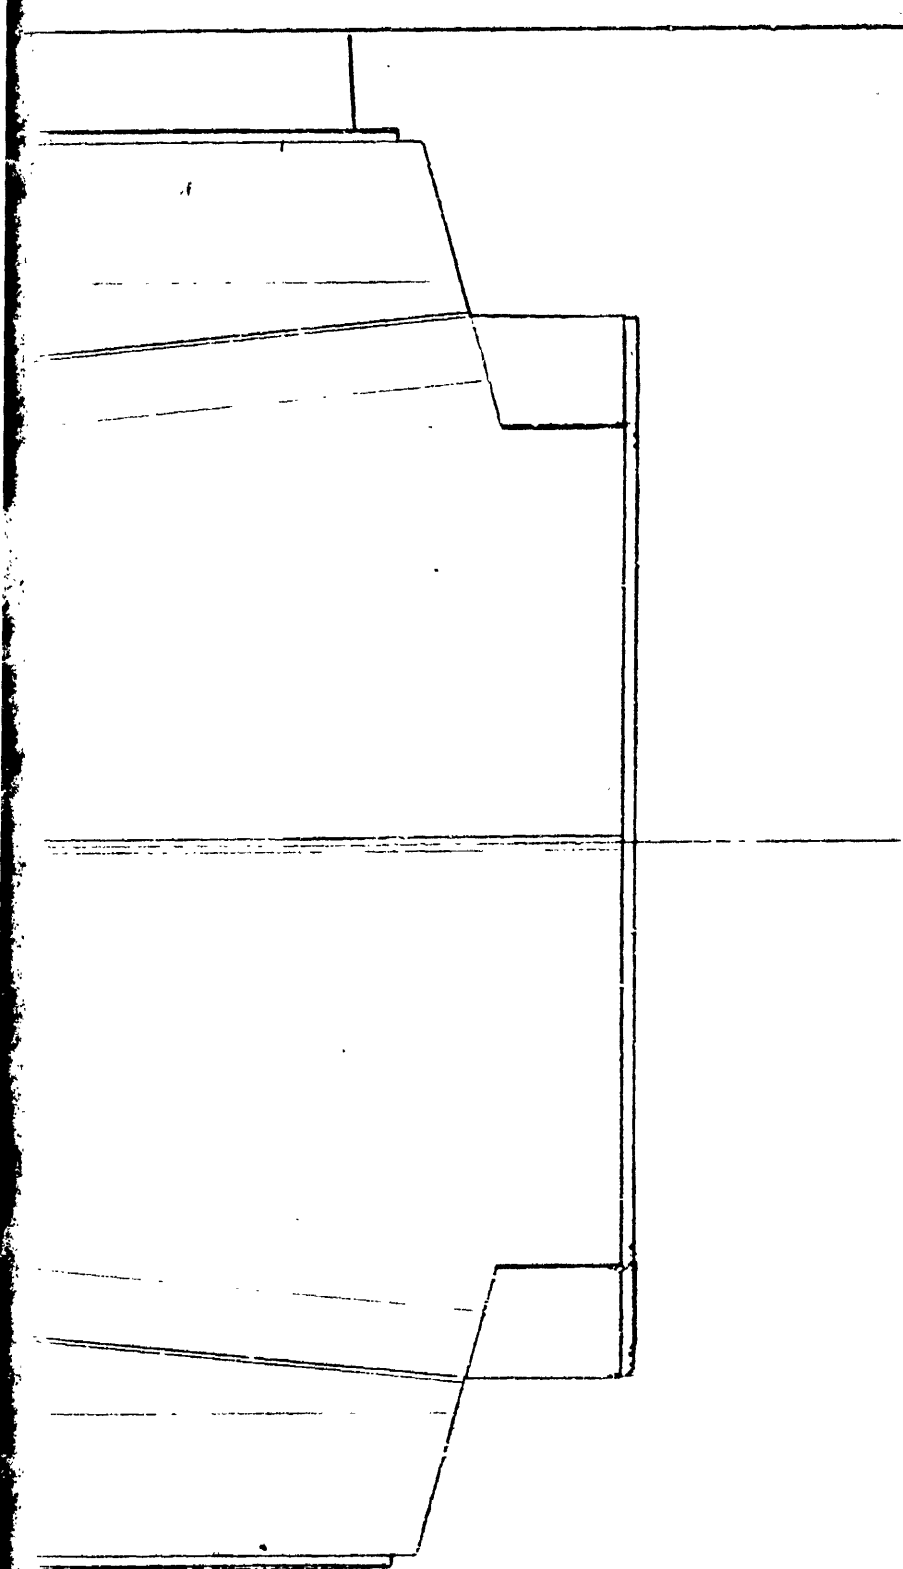


SECTION S-S

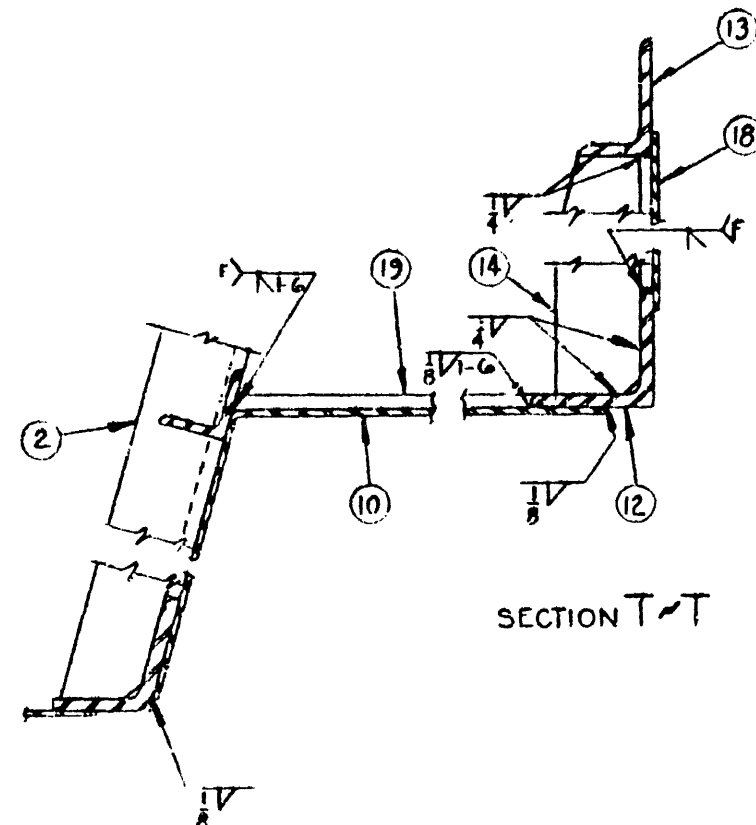


SECTION T-T

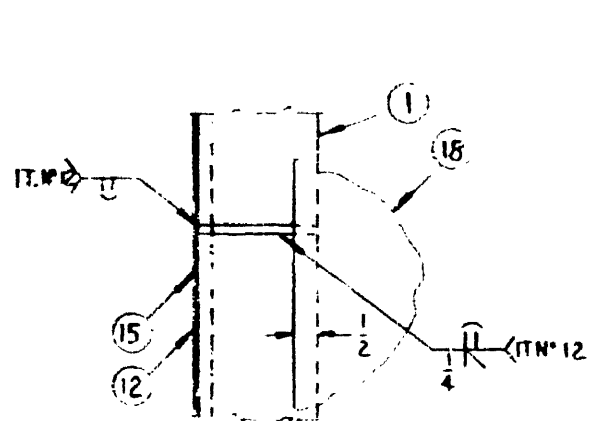



SECTION P-P

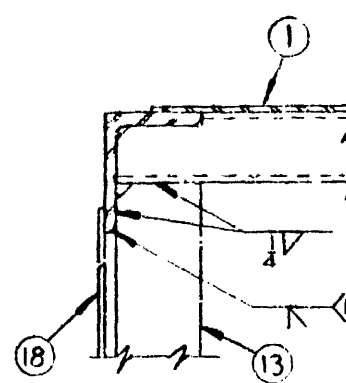


SECTION R-R

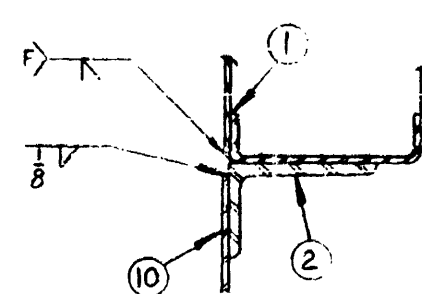


SECTION U-U

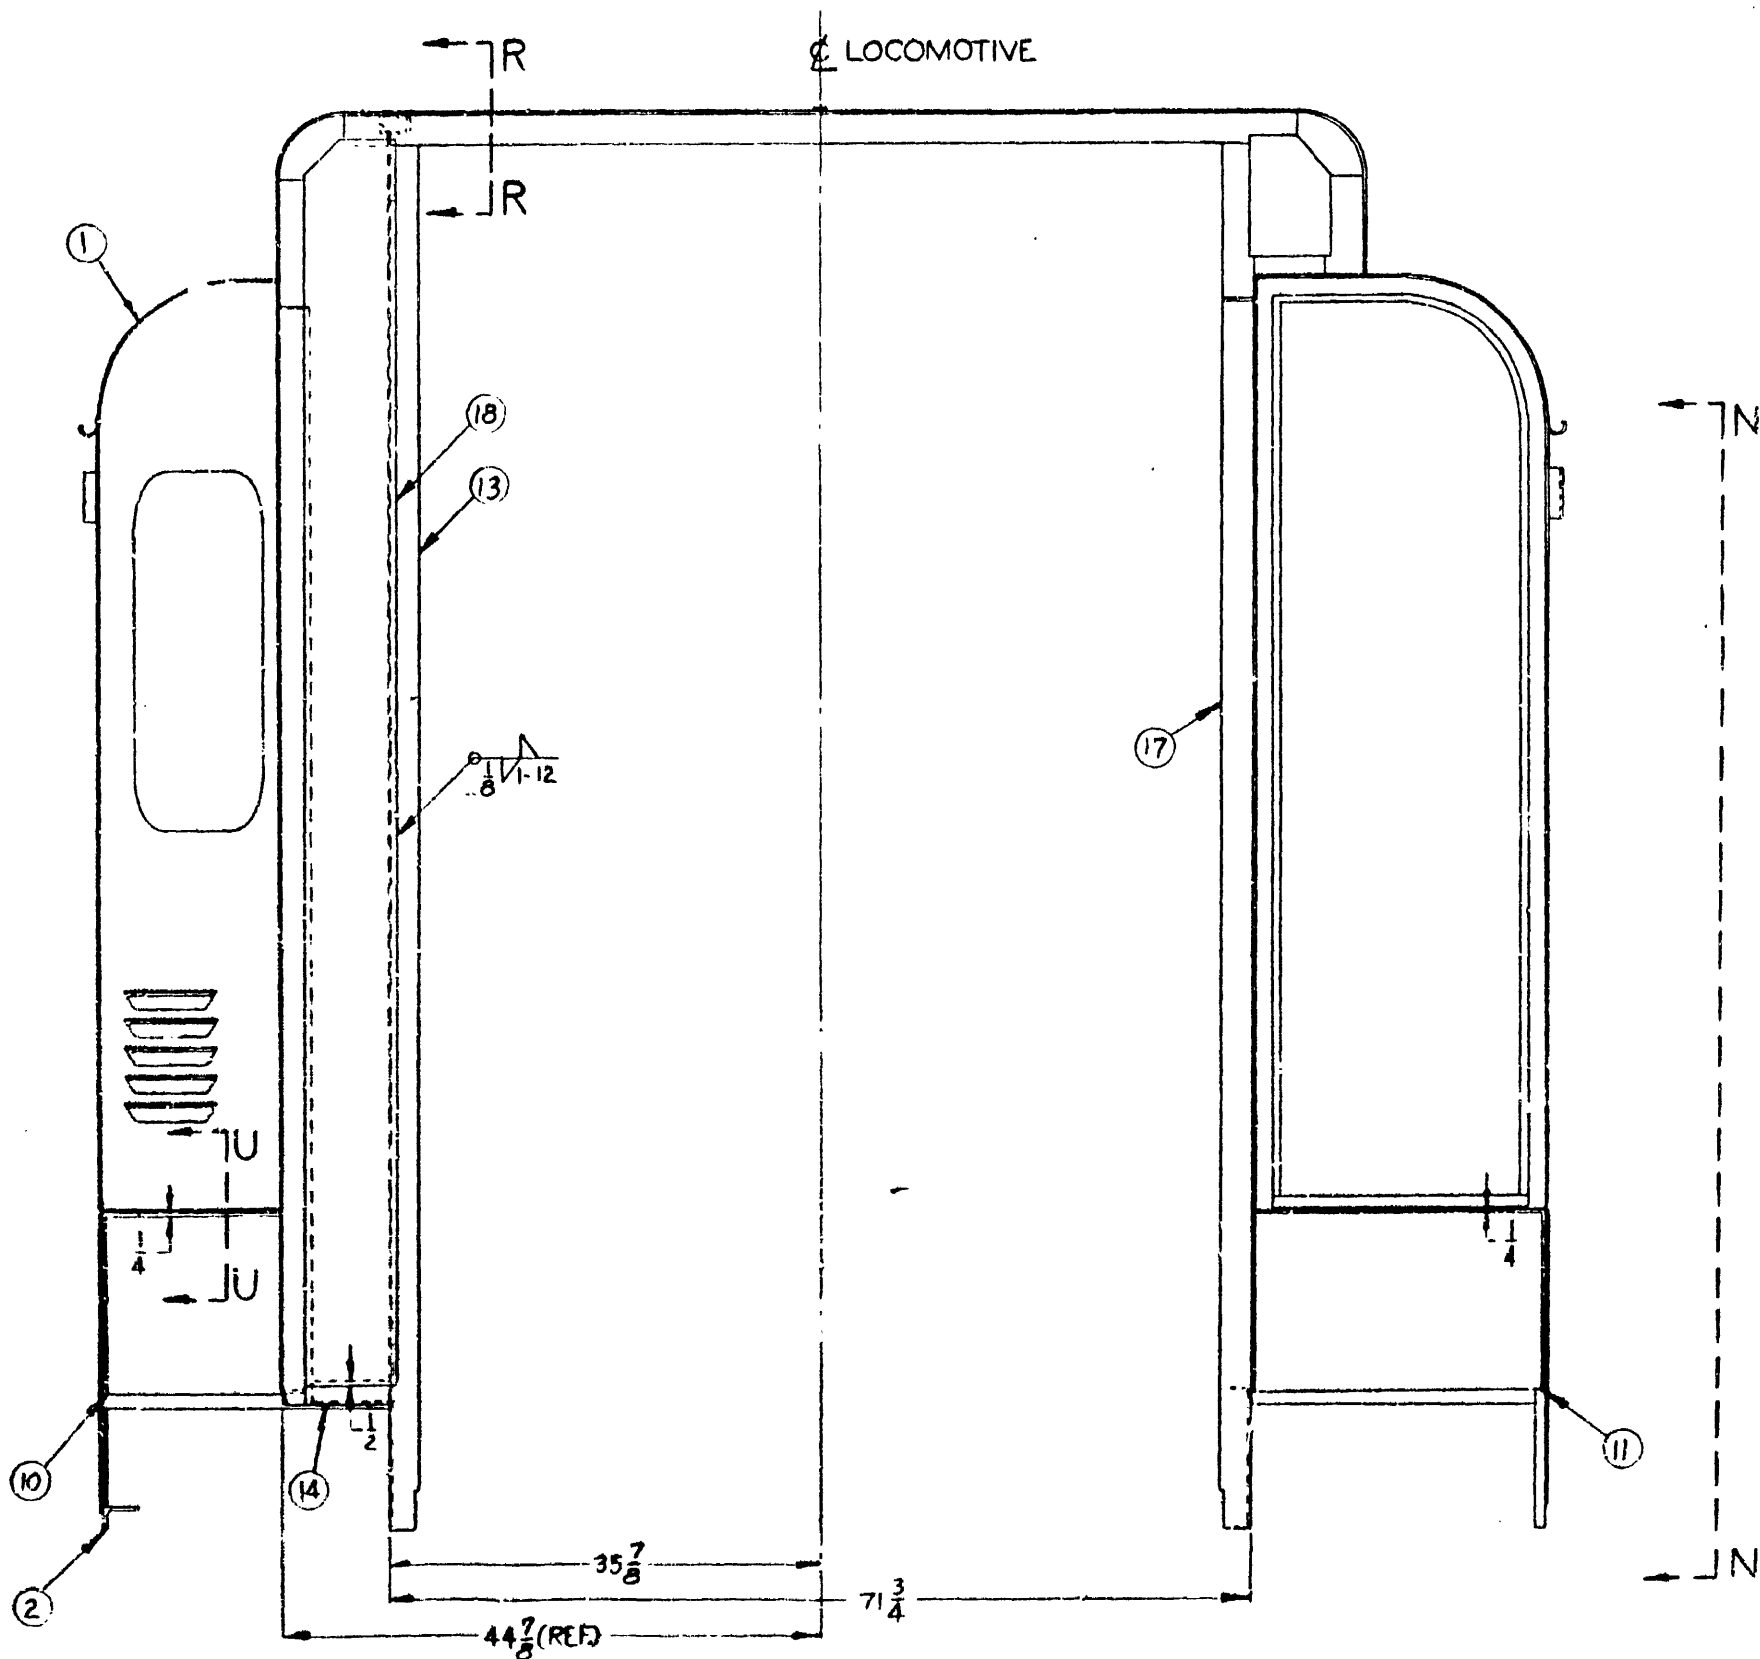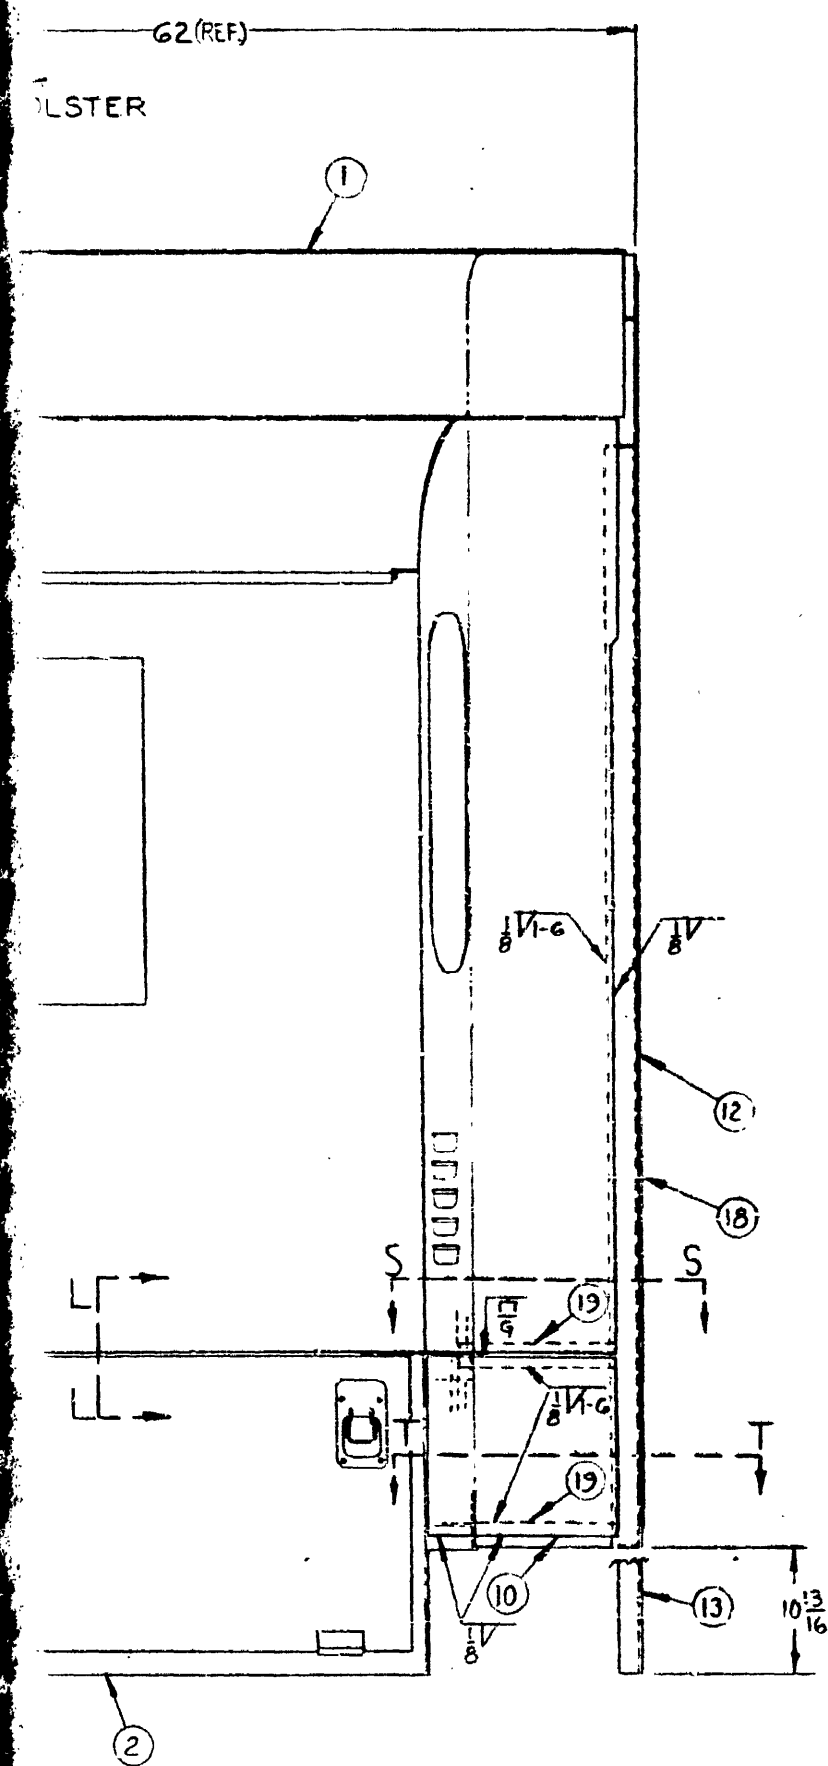

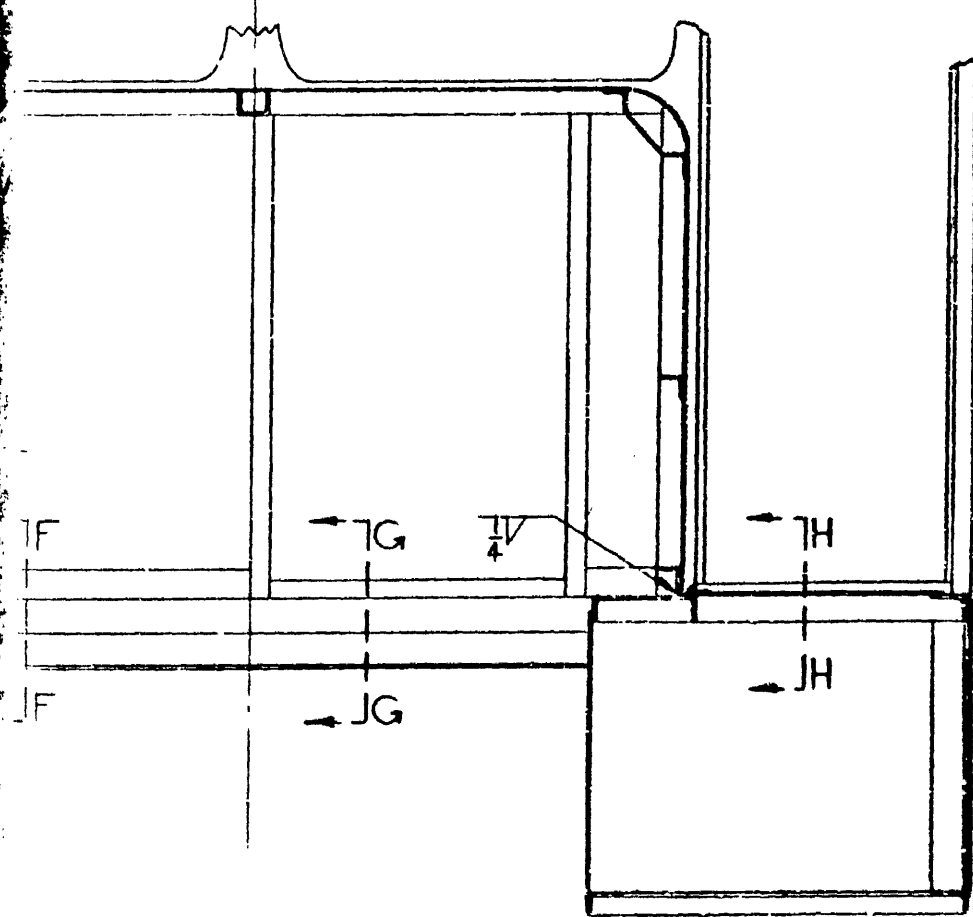




SECTION A-A








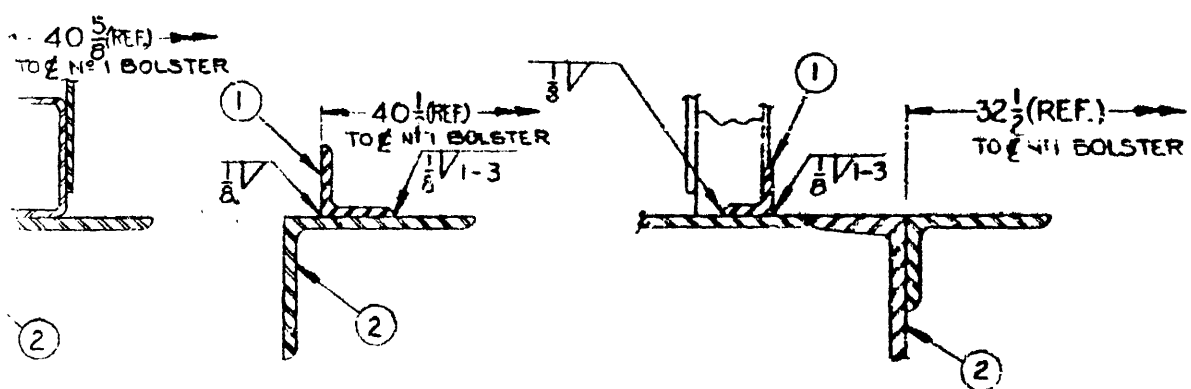


SECTION F-F

SECTION G-G

SECTION H-H

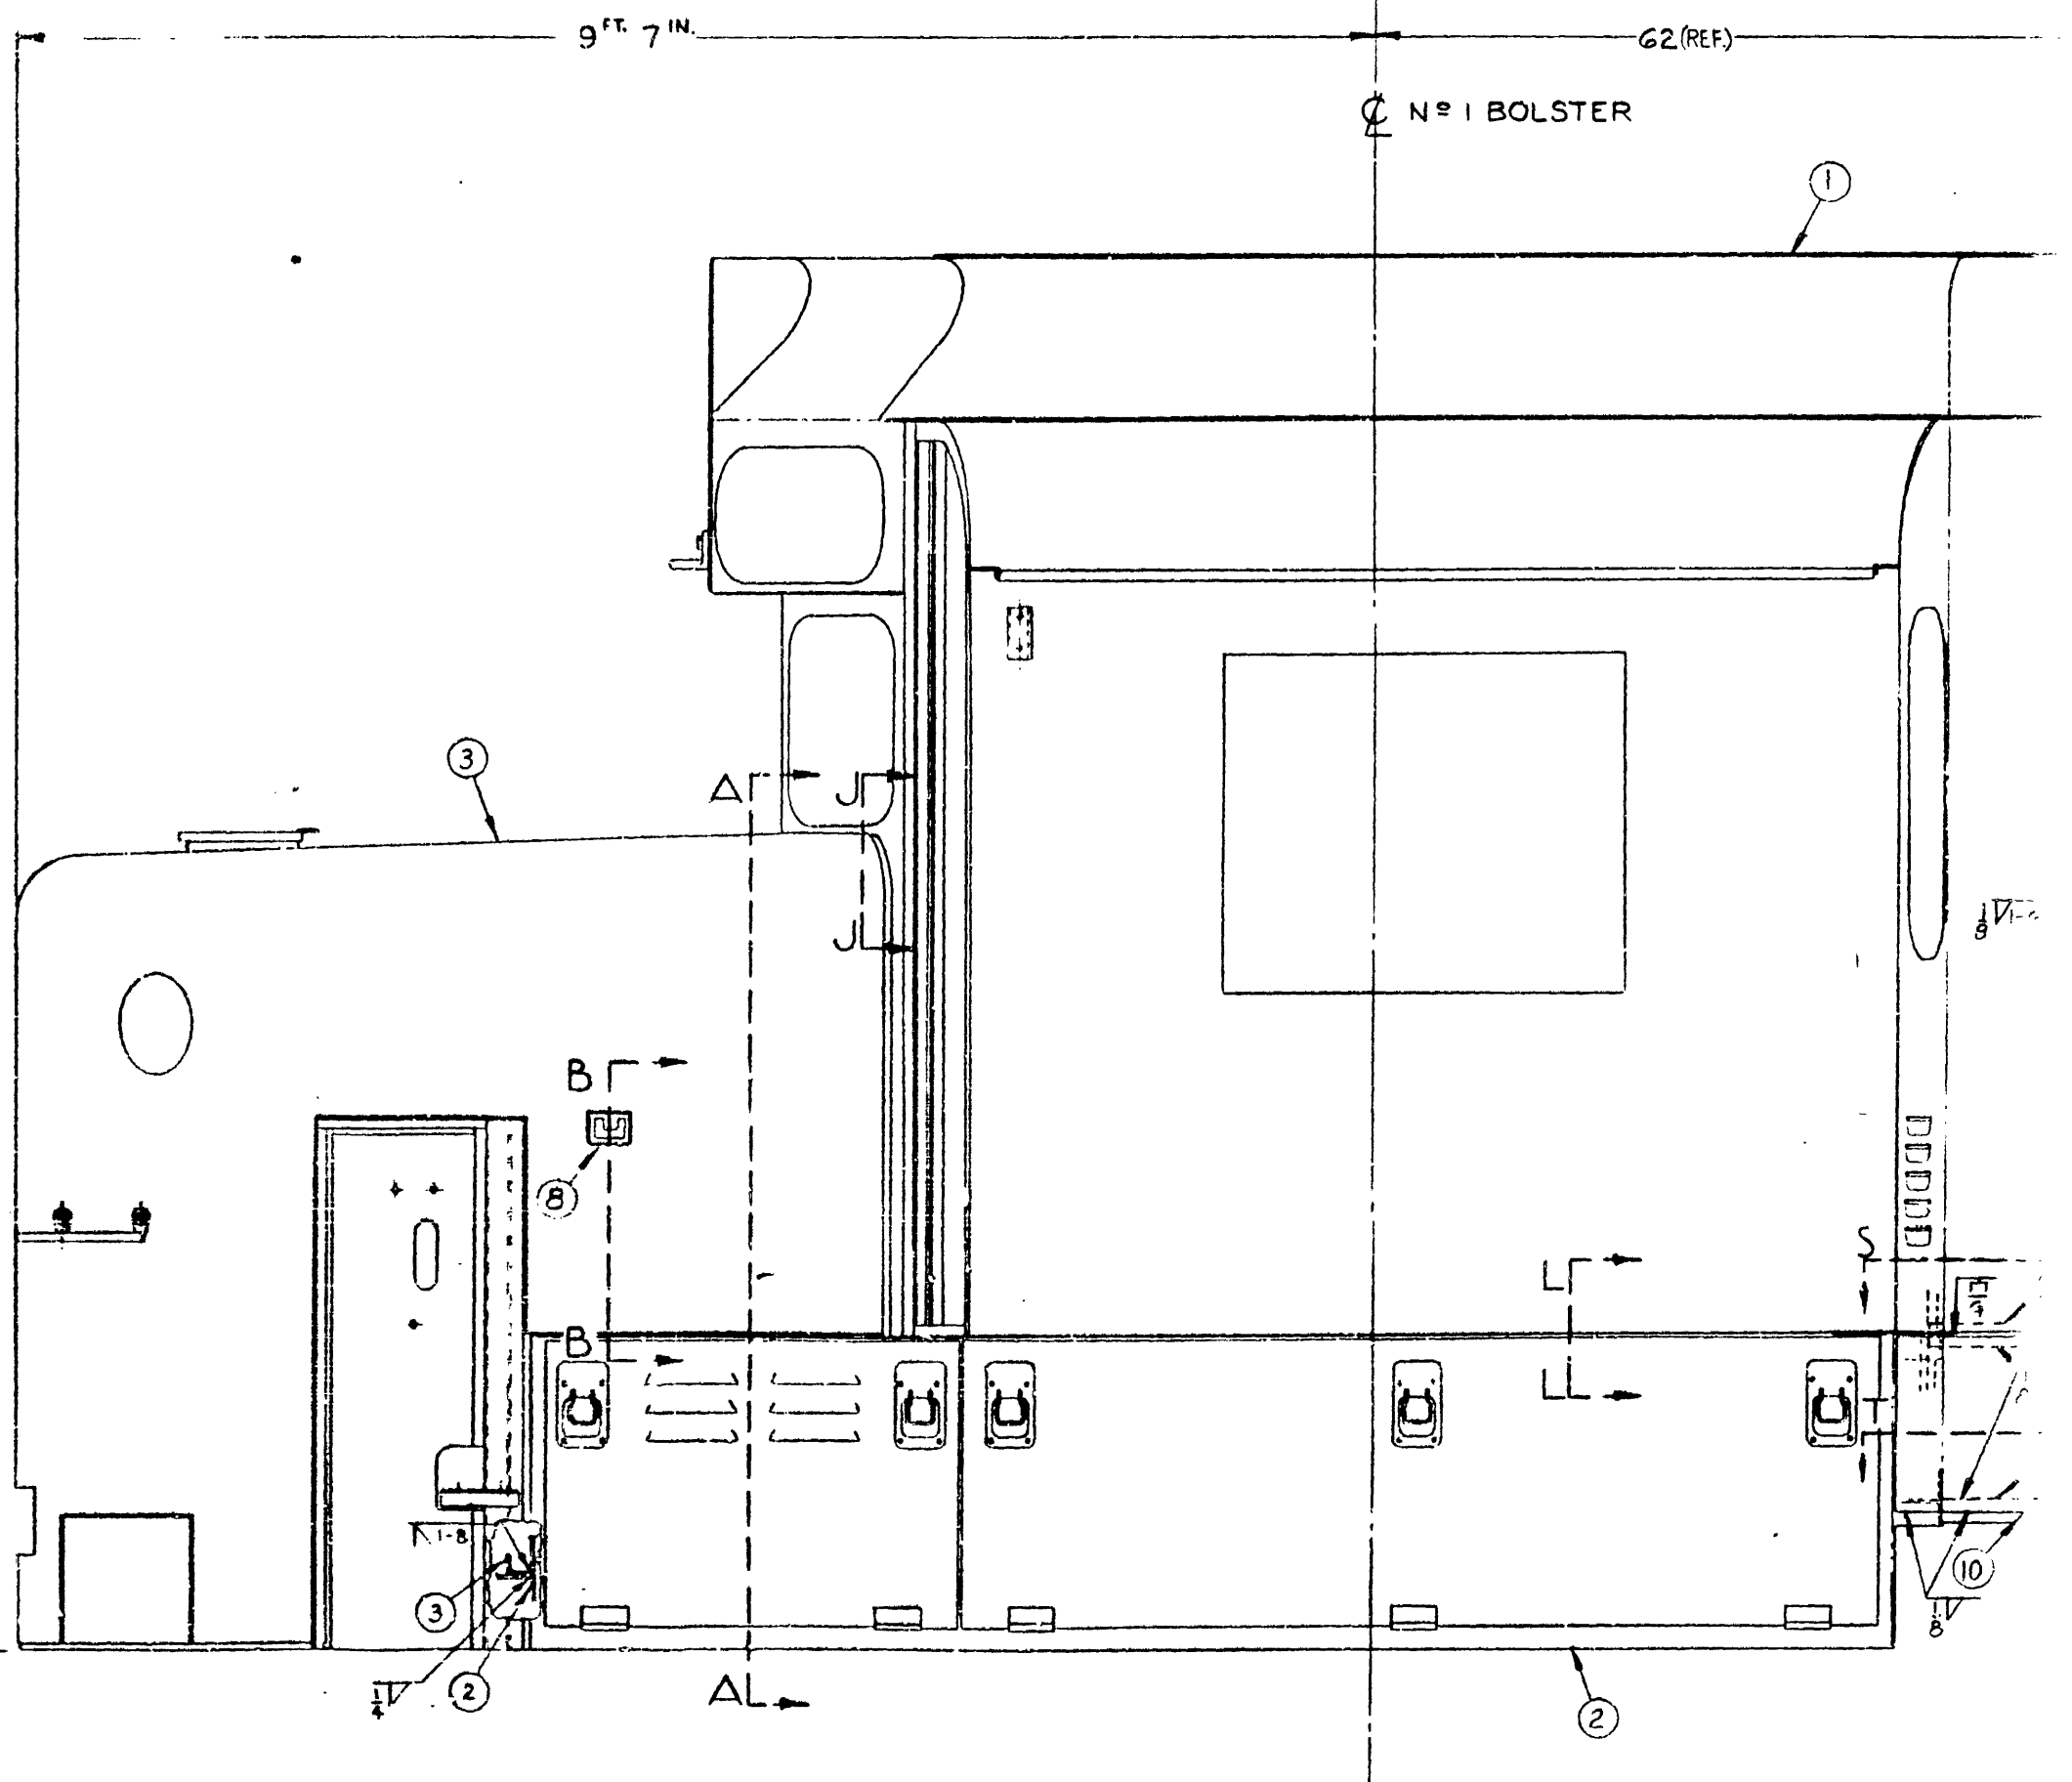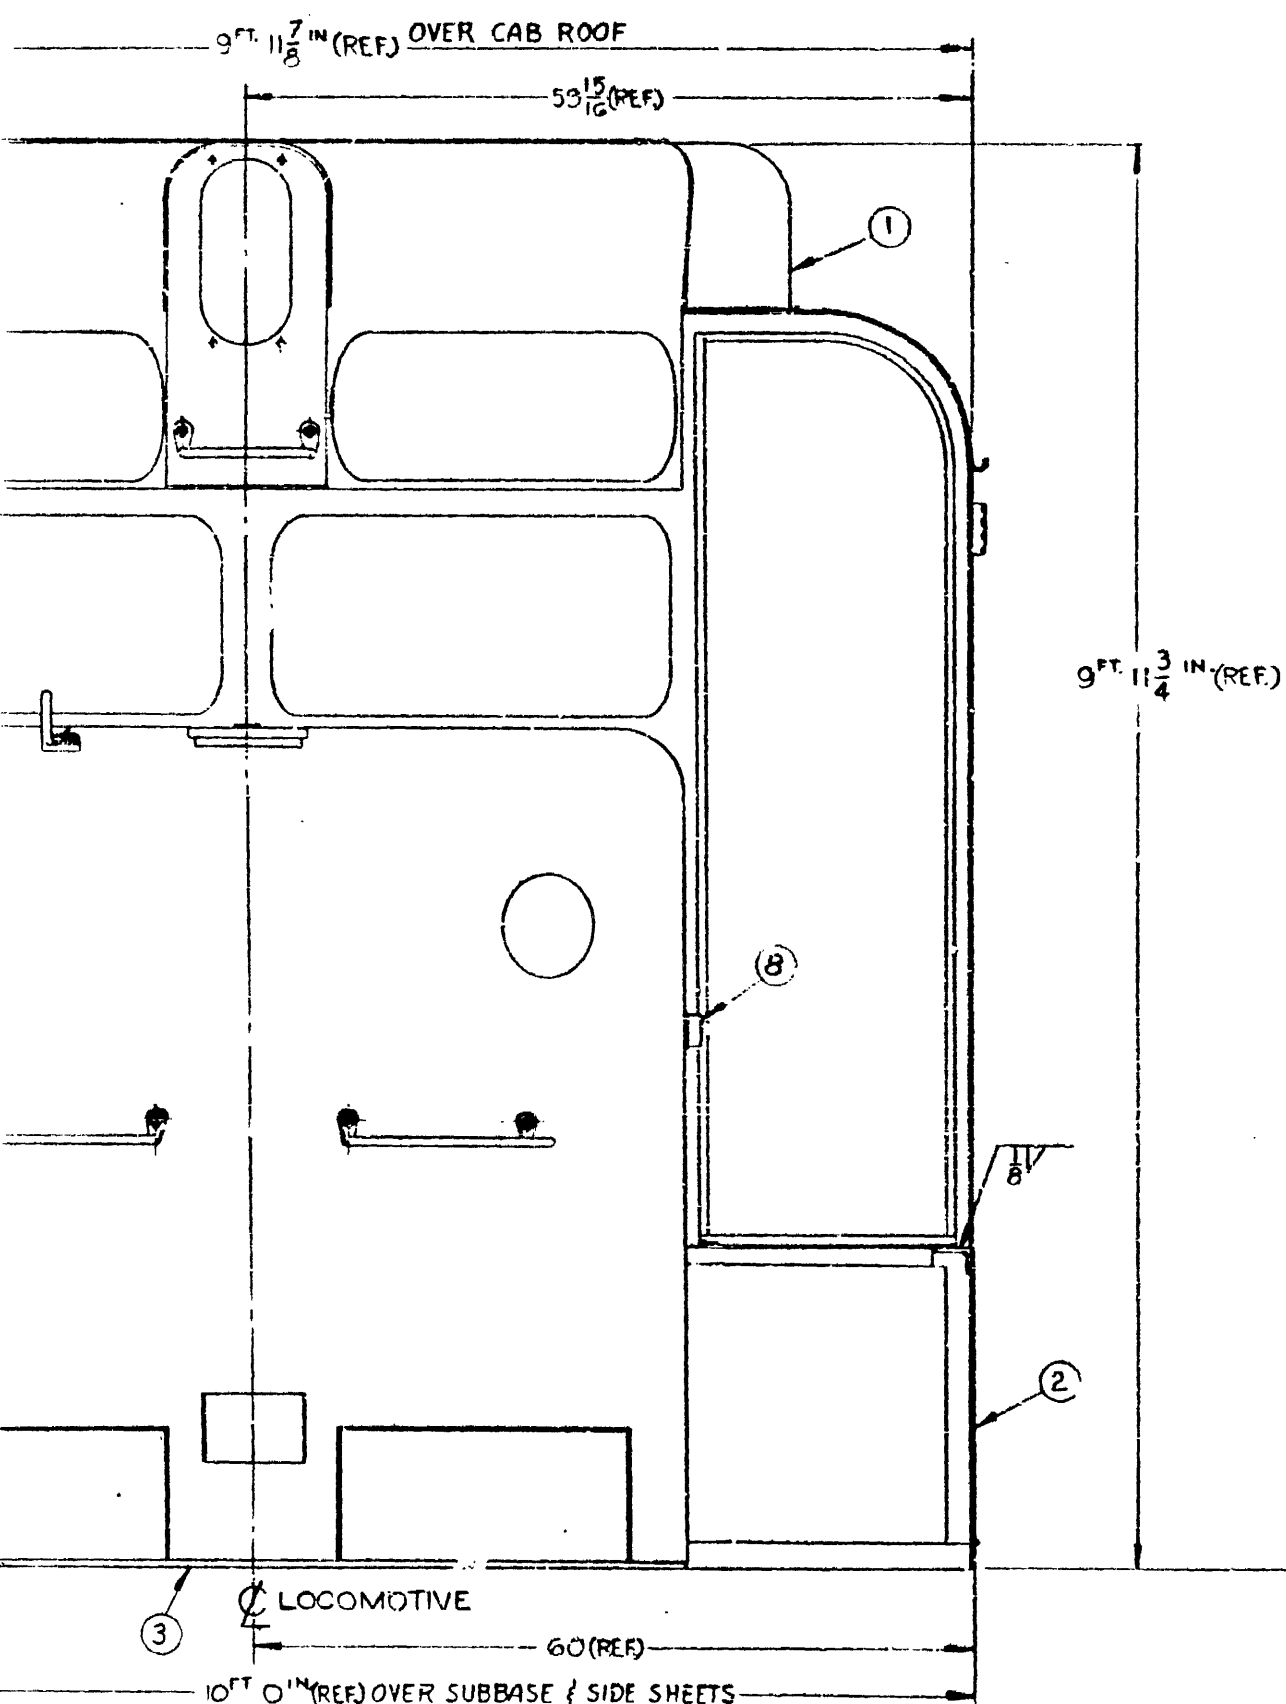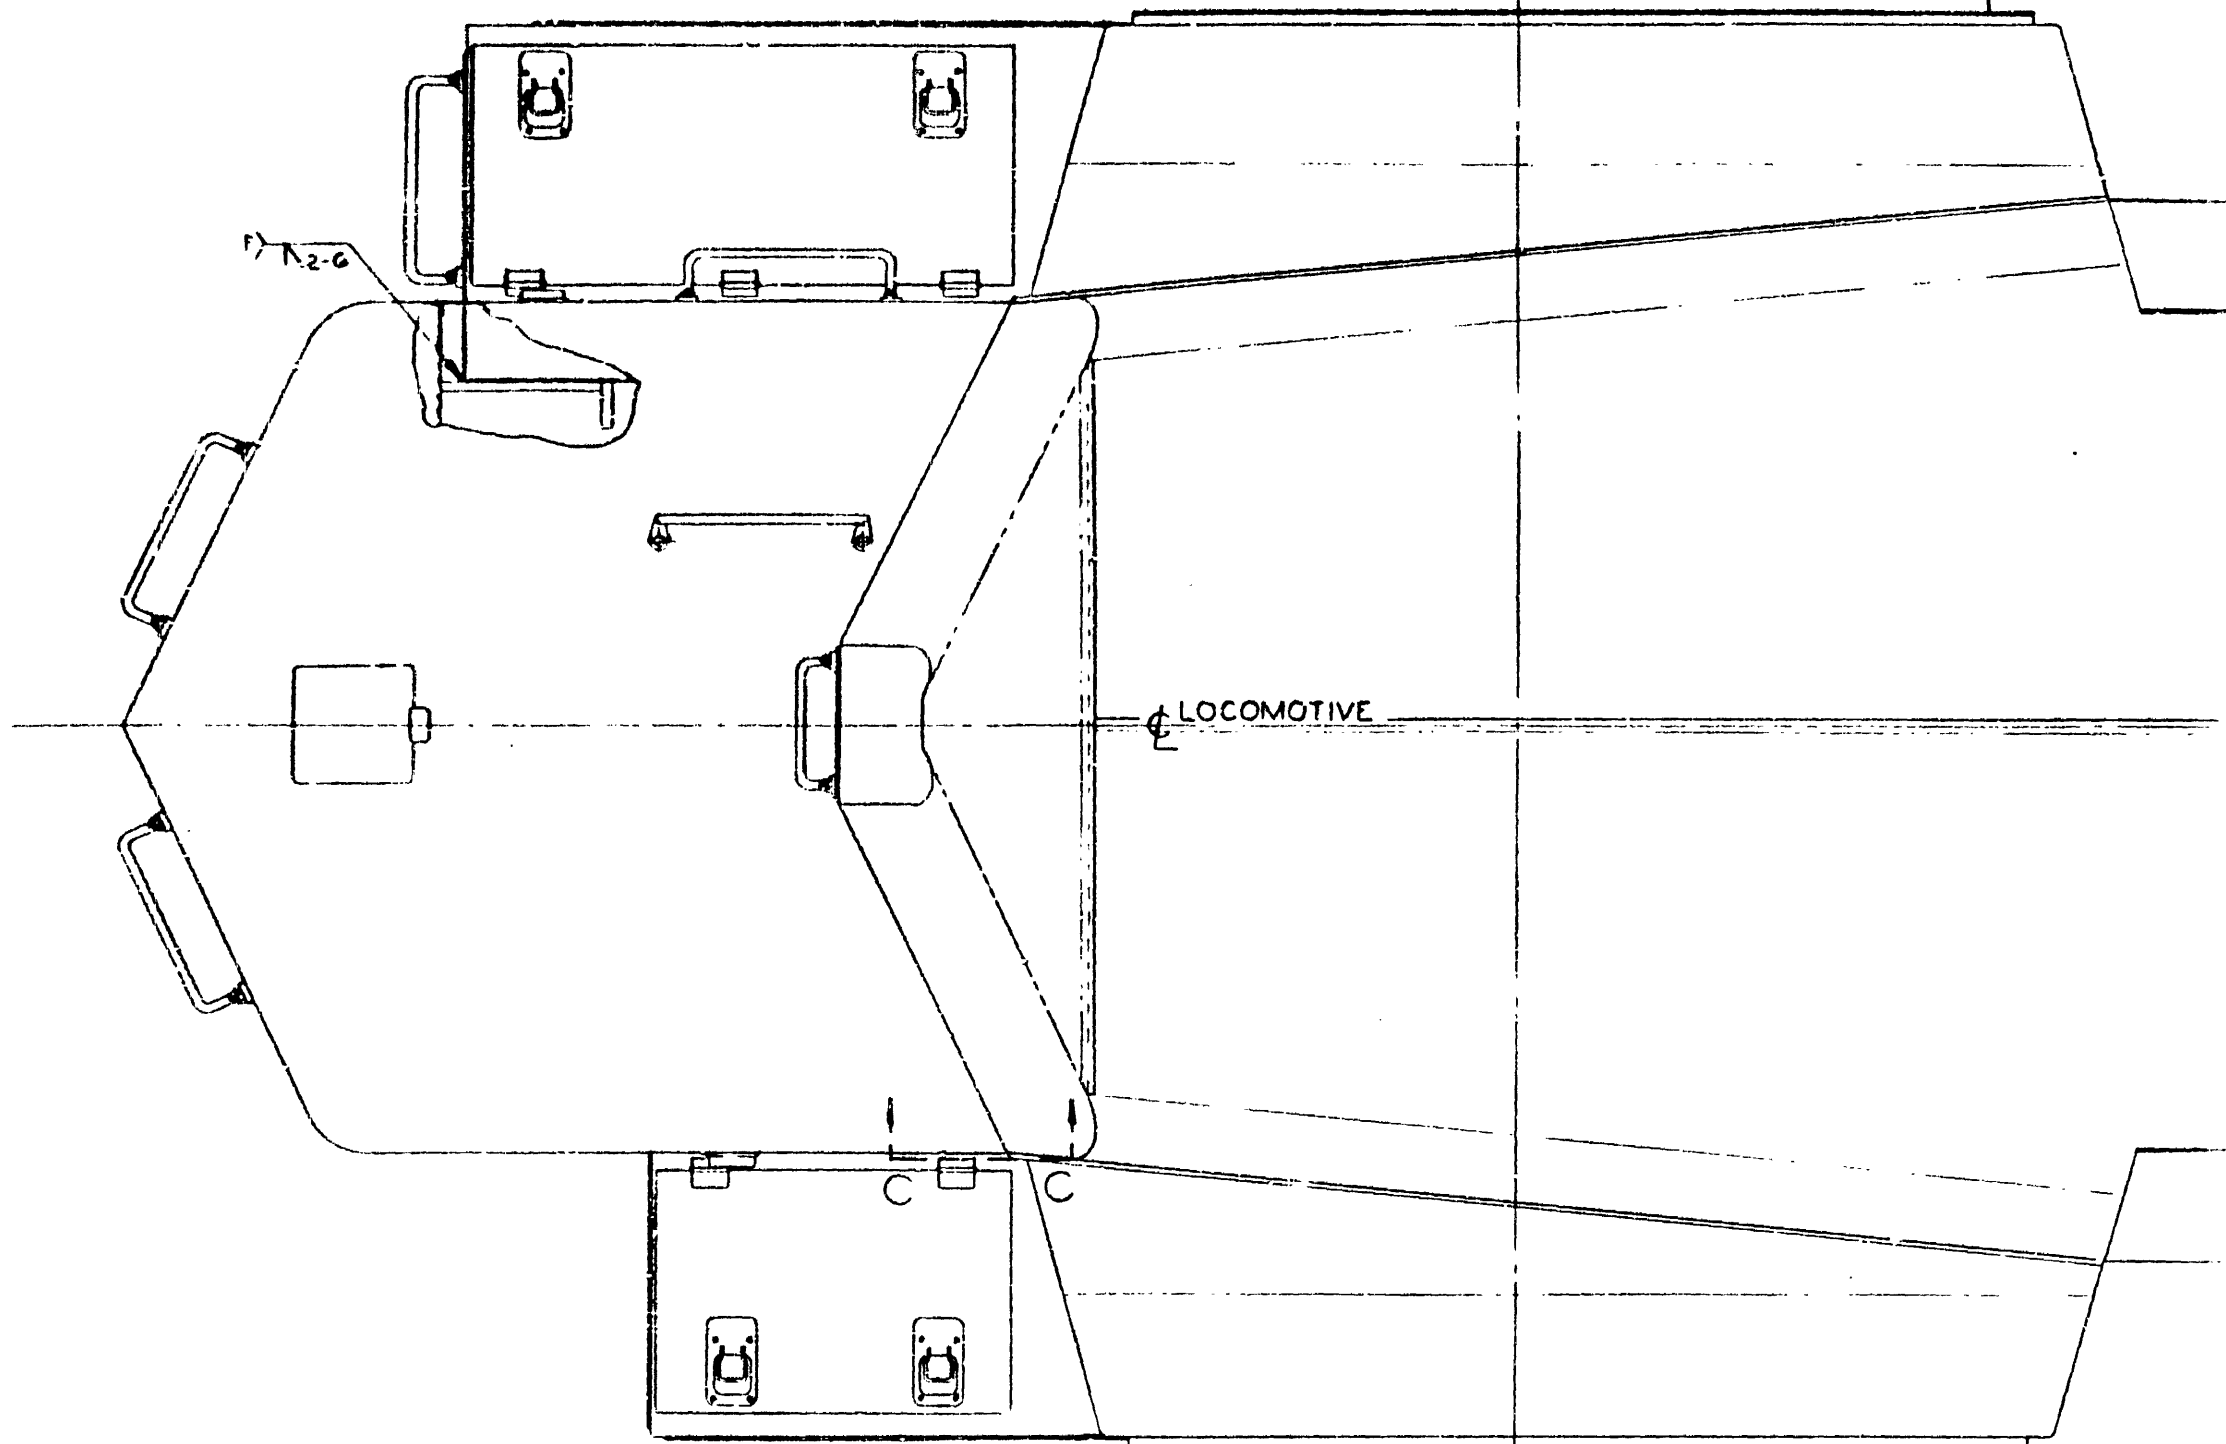

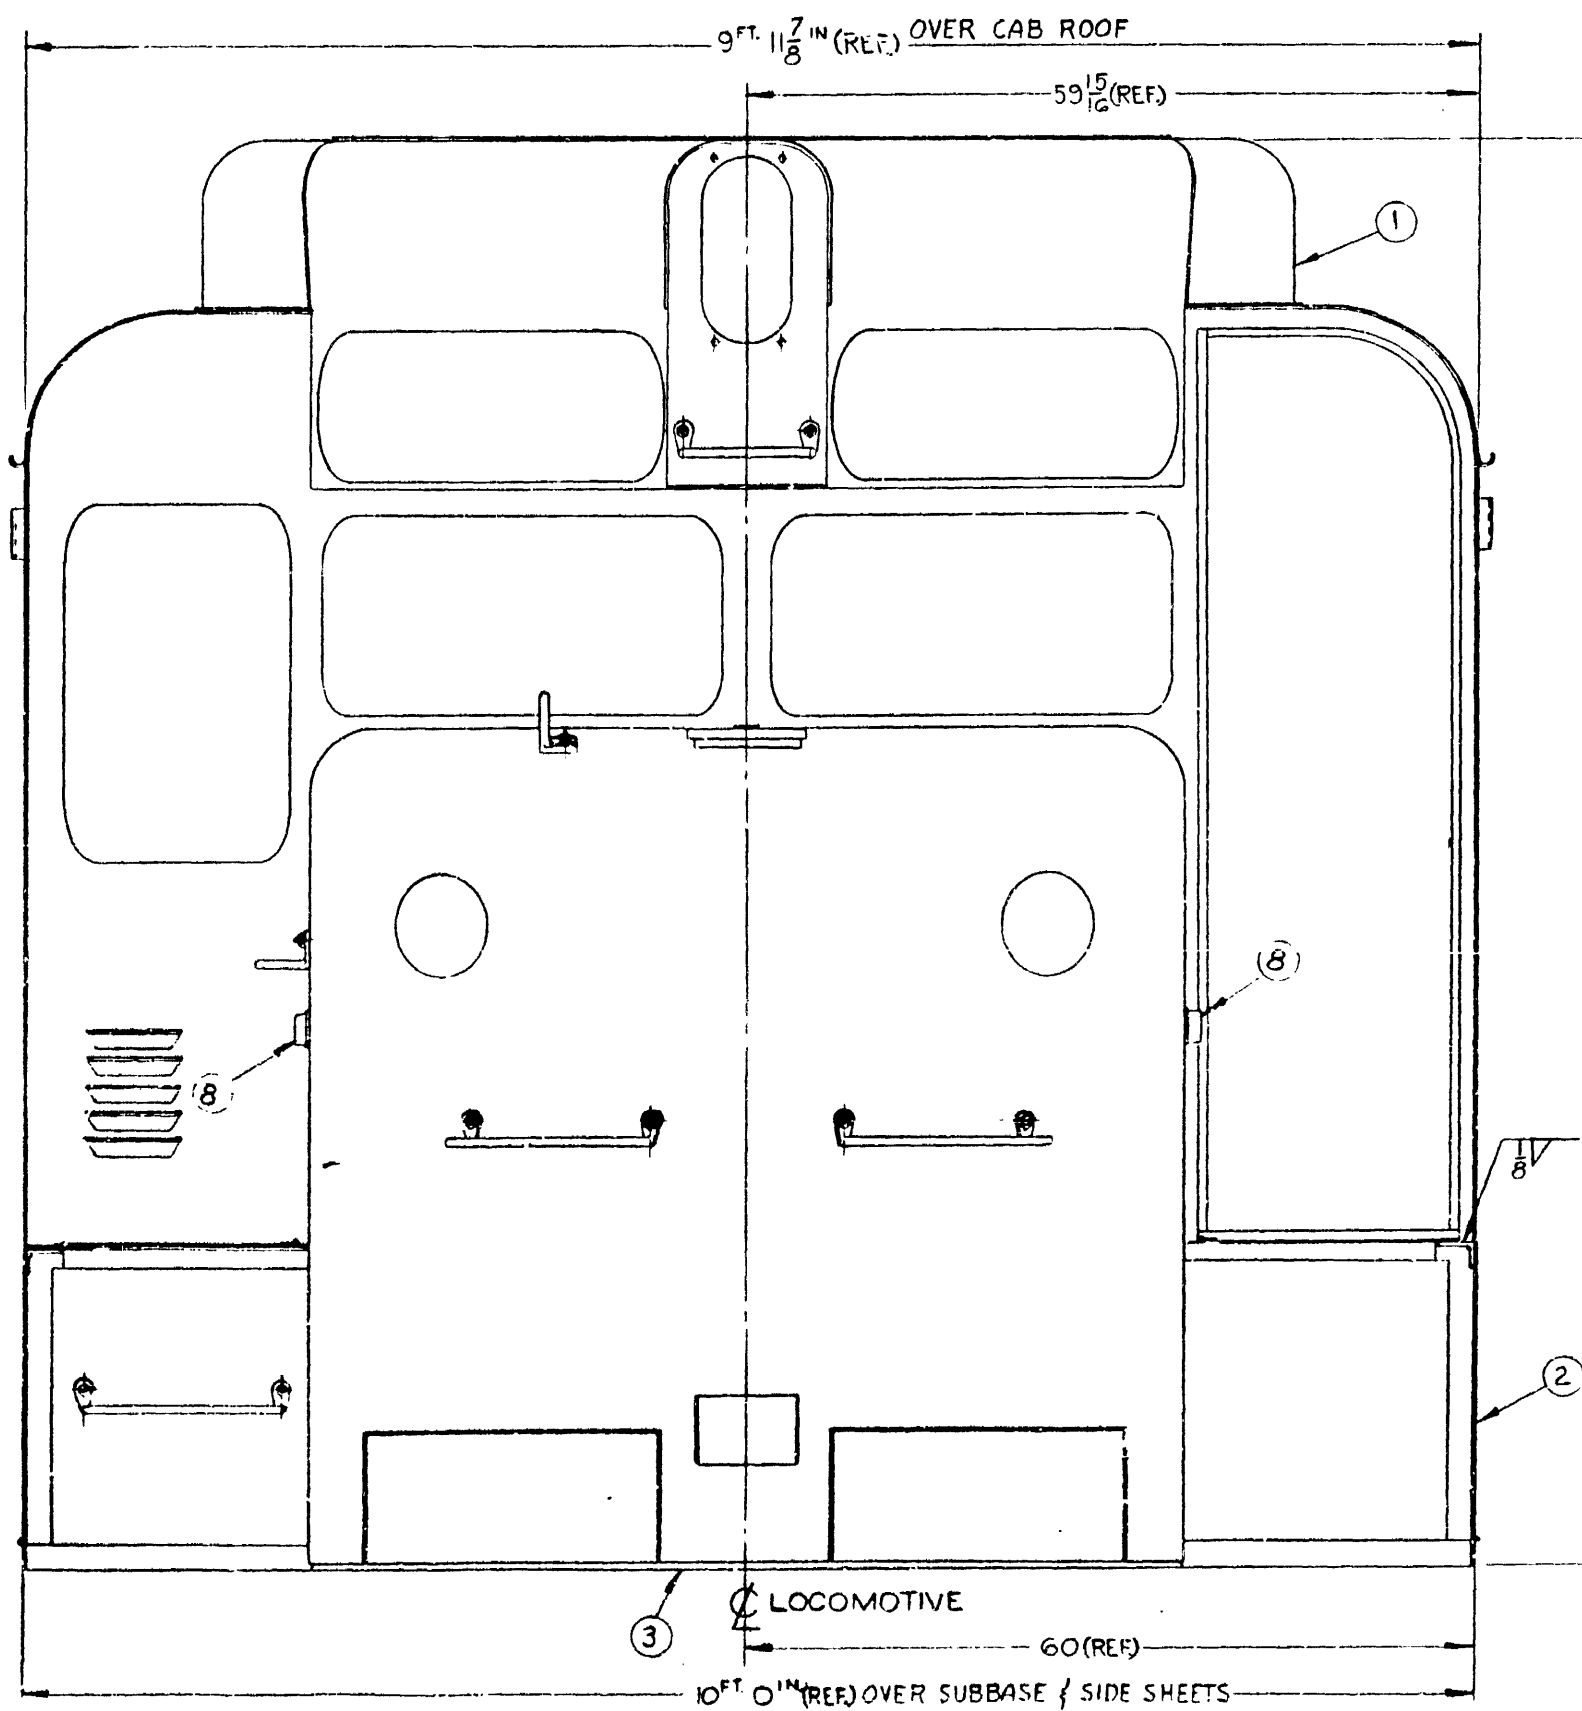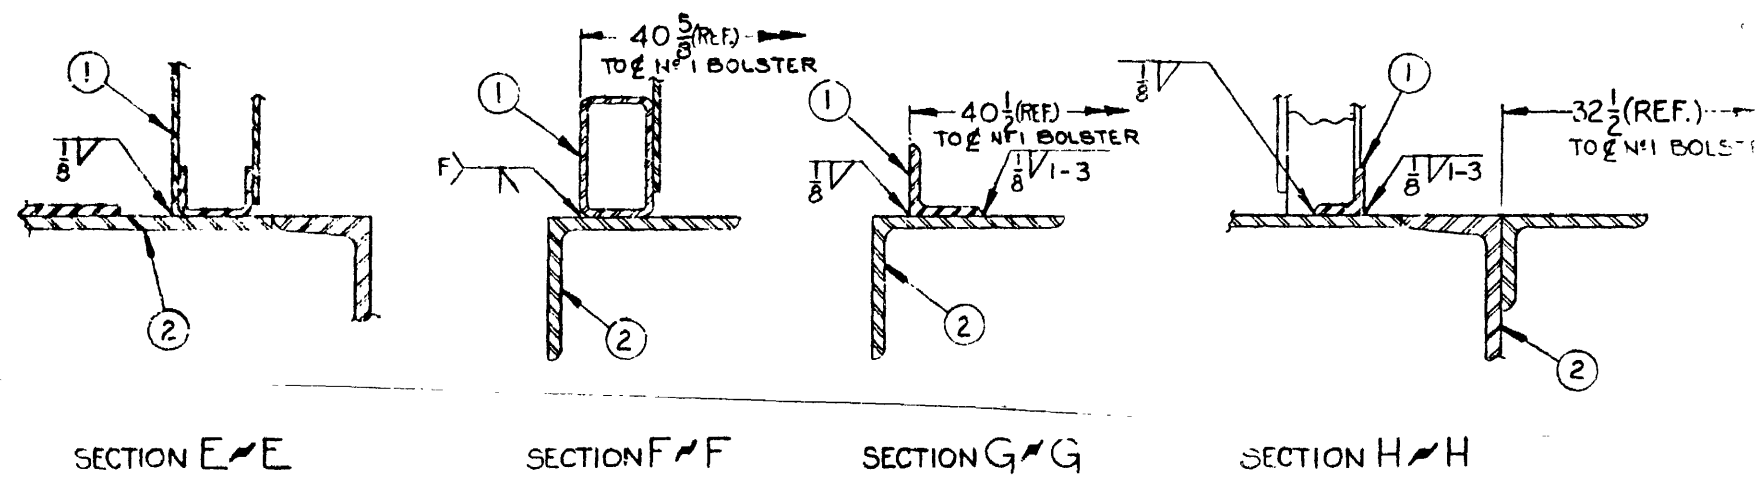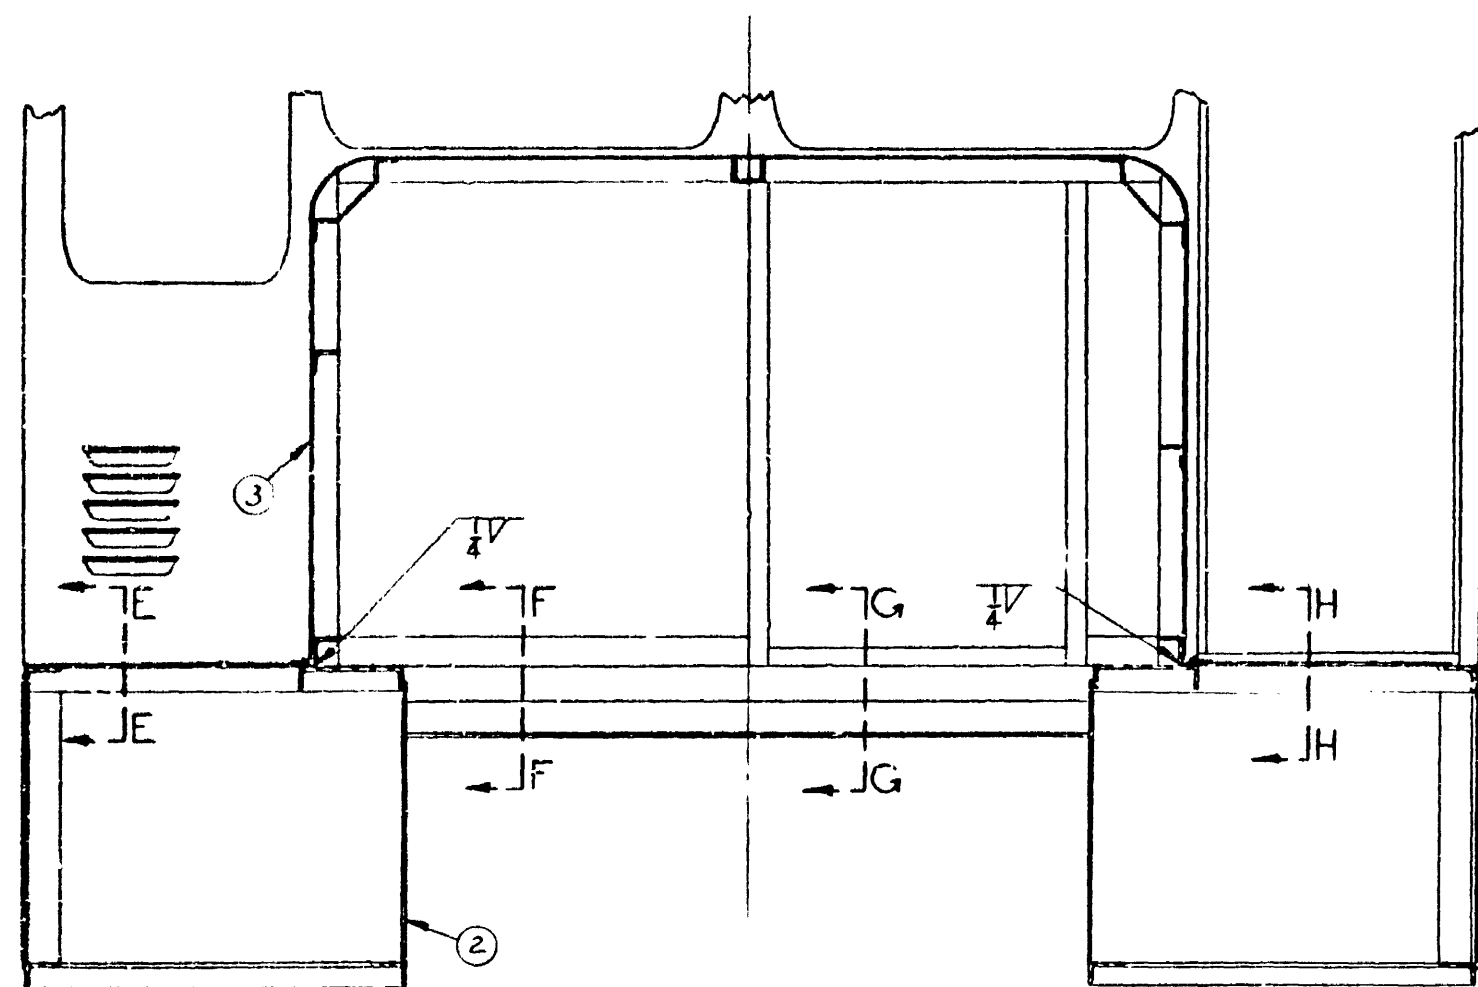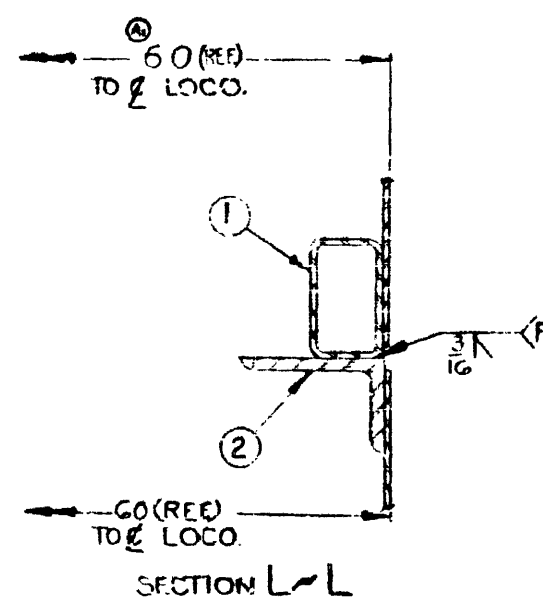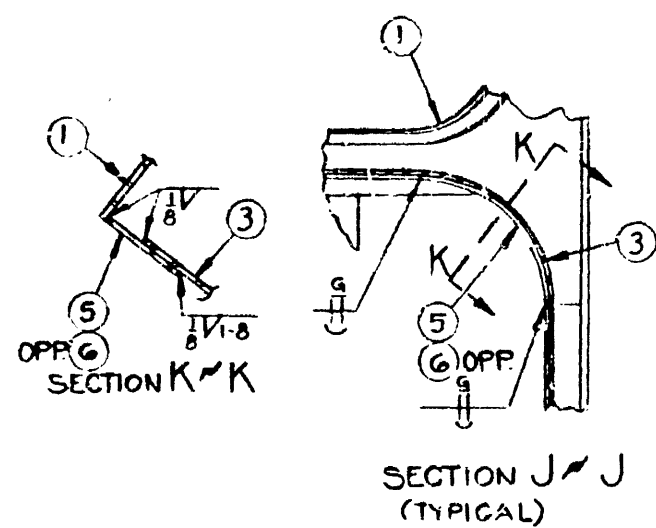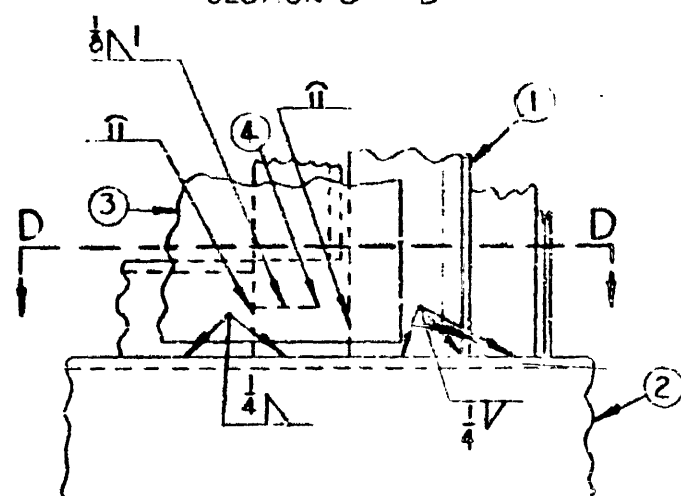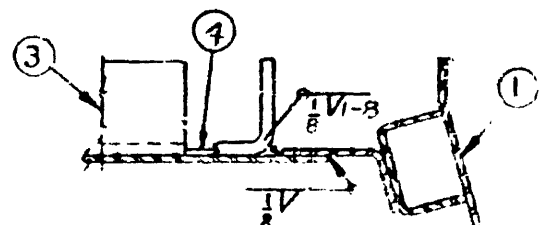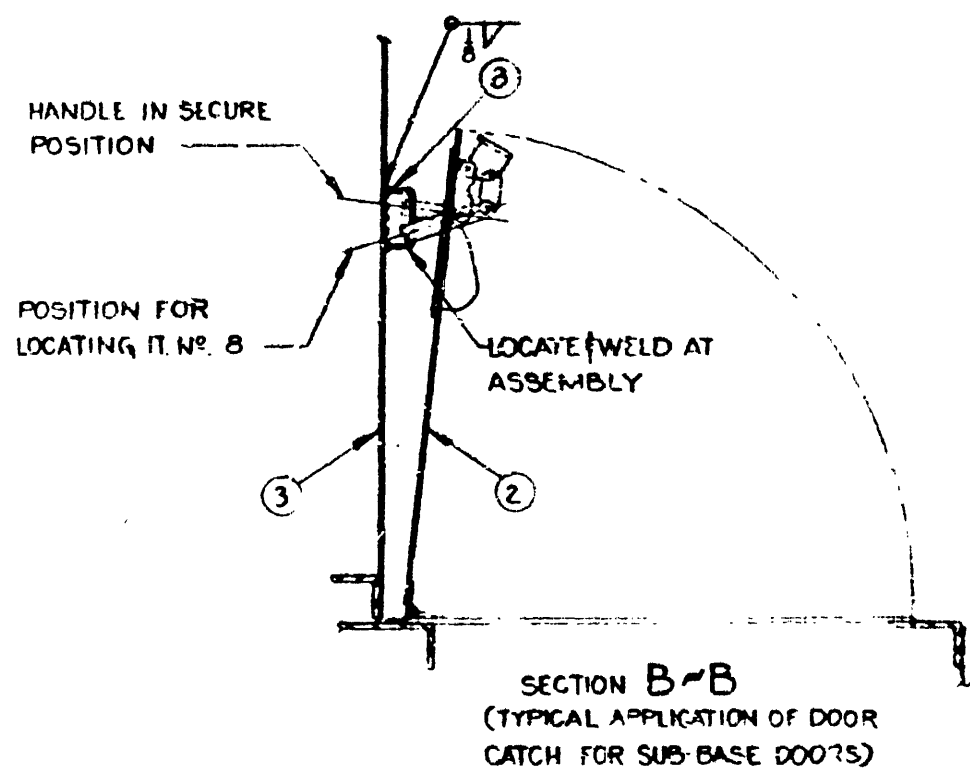

BREAK ALL SHARP CORNERS
UNLESS OTHERWISE SPECIFIED
COUNTERSINK ALL TAPPED HOLES
1/8" X ONE THIRD DEEP
SURFACE FINISH SPECS ARE IN
ACCORDANCE WITH G.W. CRK. STDS.
PERMISSIBLE VARIATION ON COMMON
FRACTION DIMENSIONS TO MACHINED
SURFACES TO BE ±.010 UNLESS
OTHERWISE SPECIFIED
FABRICATION TOLERANCE:
CASTING TOLERANCE:
FORGING TOLERANCE: