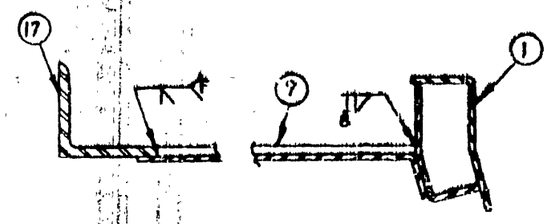

SECTION V-V

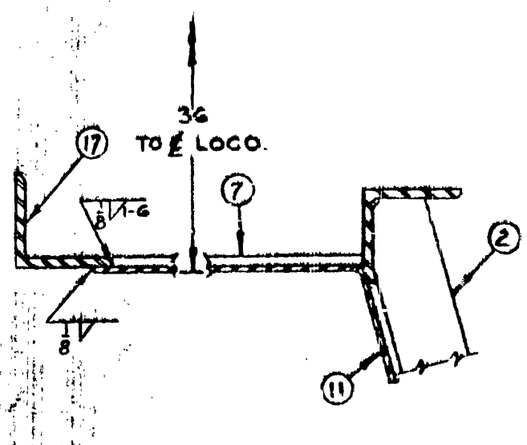

SECTION W-W

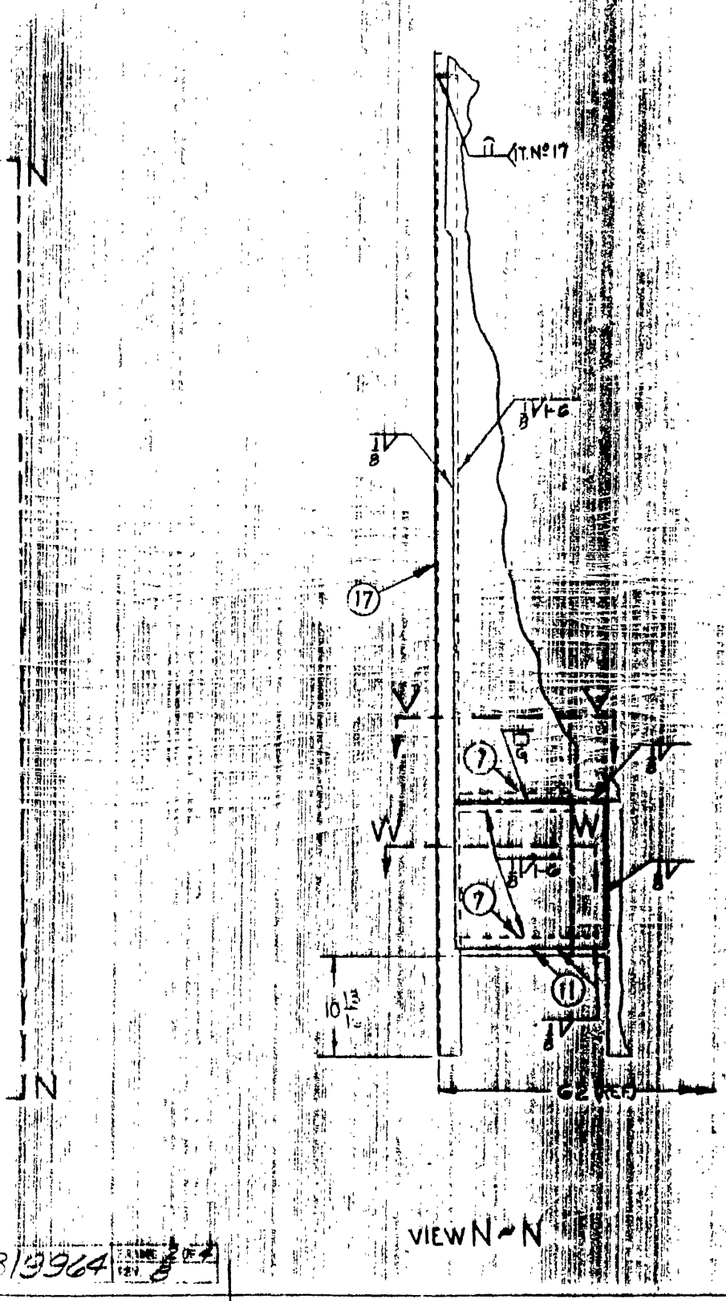

2		PAD	8180476	21
X		ANGLE ASSEMBLY	8313951	20
2		PAD	8323826	19
1		SHEET ASM.	8313993	18
1		ANGLE	8313990	17
X		ANGLE ASSEMBLY	8313991	16
X		ANGLE	8313979	15
1		ANGLE	8313995	14
1		ANGLE	8313987	13
1		ANGLE	8313981	12
1		SHEET	8314139	11
1		SHEET	8319995	10
X		BRACKET	8313441	9
2		DOOR CATCH HOUSING	8150372	8
2		STRIP	8323815	7
1		STRIP - CLOSING	8318767	6
1		STRIP - CLOSING	8318763	5
2		FILLER	8137440	4
1		HOOD ASSEMBLY	8318681	3
1		SUB-BASE ASSEMBLY	8318179	2
1		CAB STRUCTURE ASSEM.	8319961	1

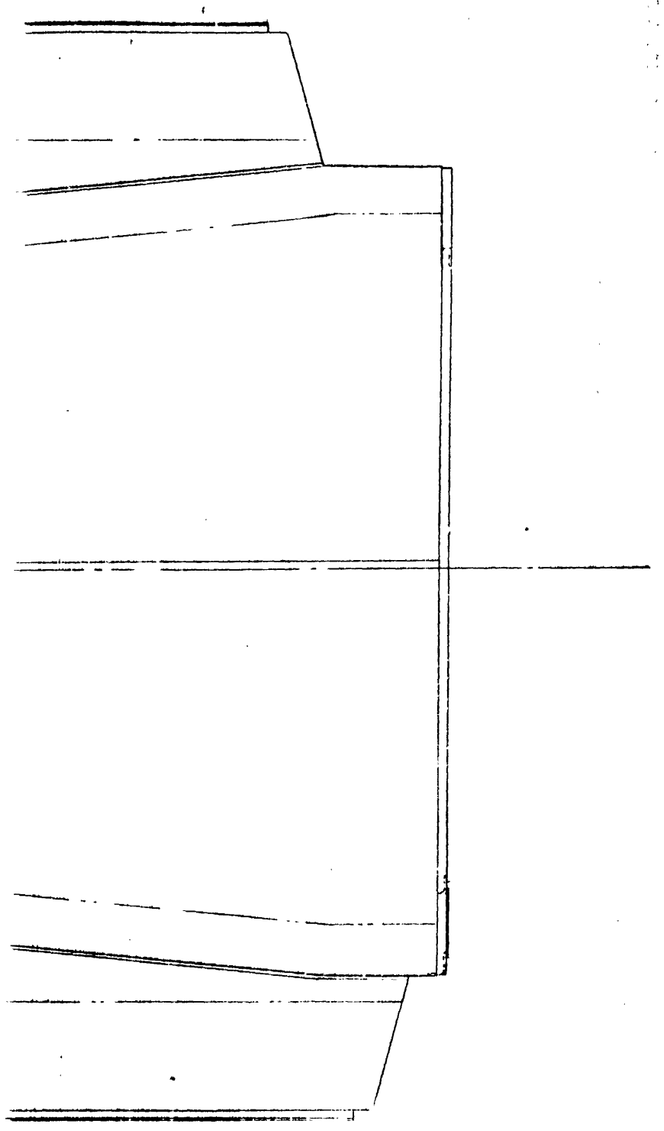

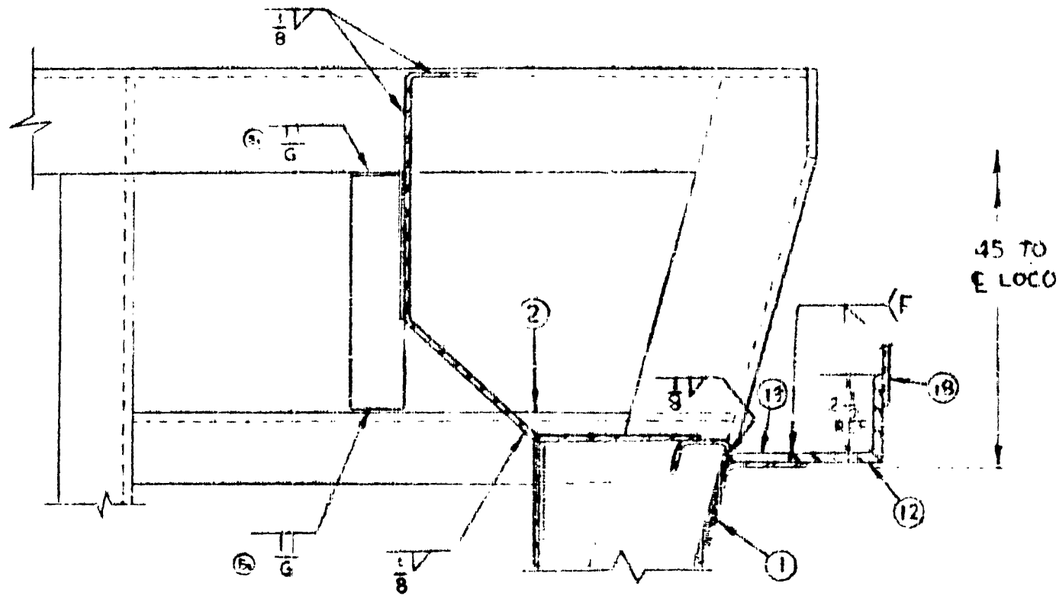
45 TO
℄ LOCO
SECTION S-S

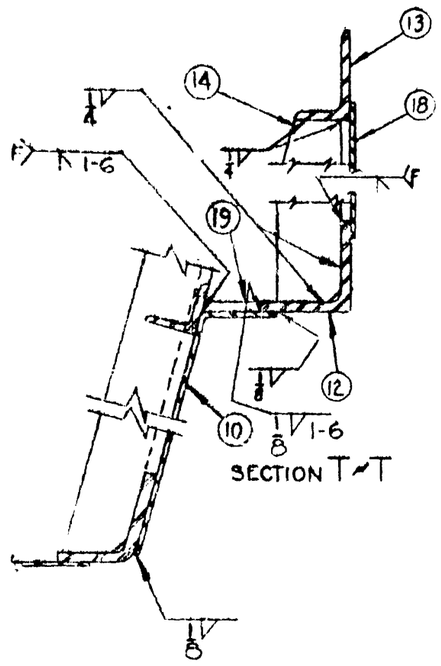
SECTION T-T

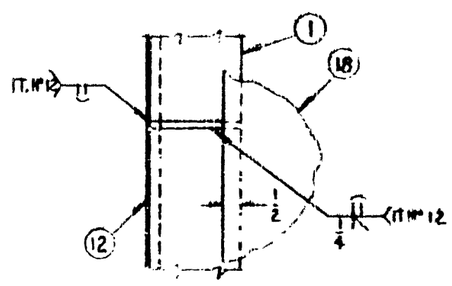
SECTION P-P


SECTION R-R


SECTION U-U

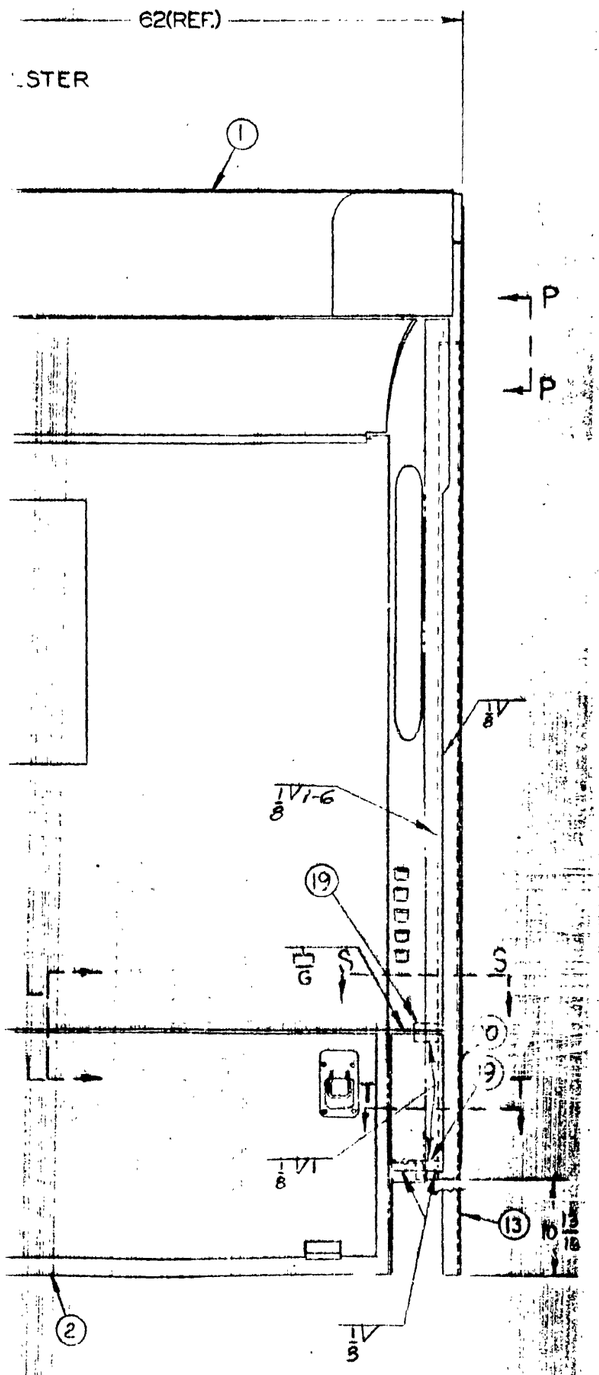
62(REF.)
STER
P
P
S
S
T
T
U
U
R
R
℄ LOCOMOTIVE
N
N
35 7/8
44 7/8 (REF.)
71 3/4

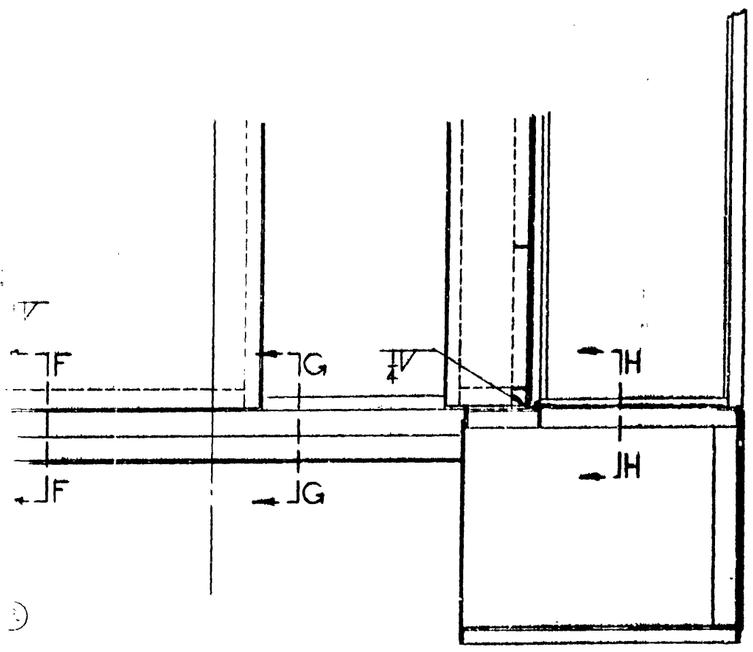

SECTION A-A

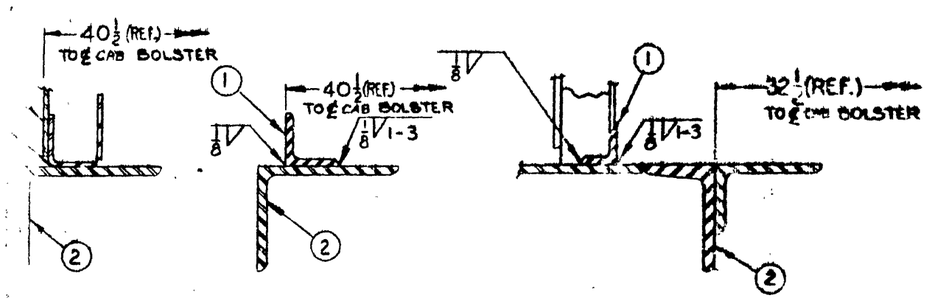

CTION F-F SECTION G-G SECTION H-H

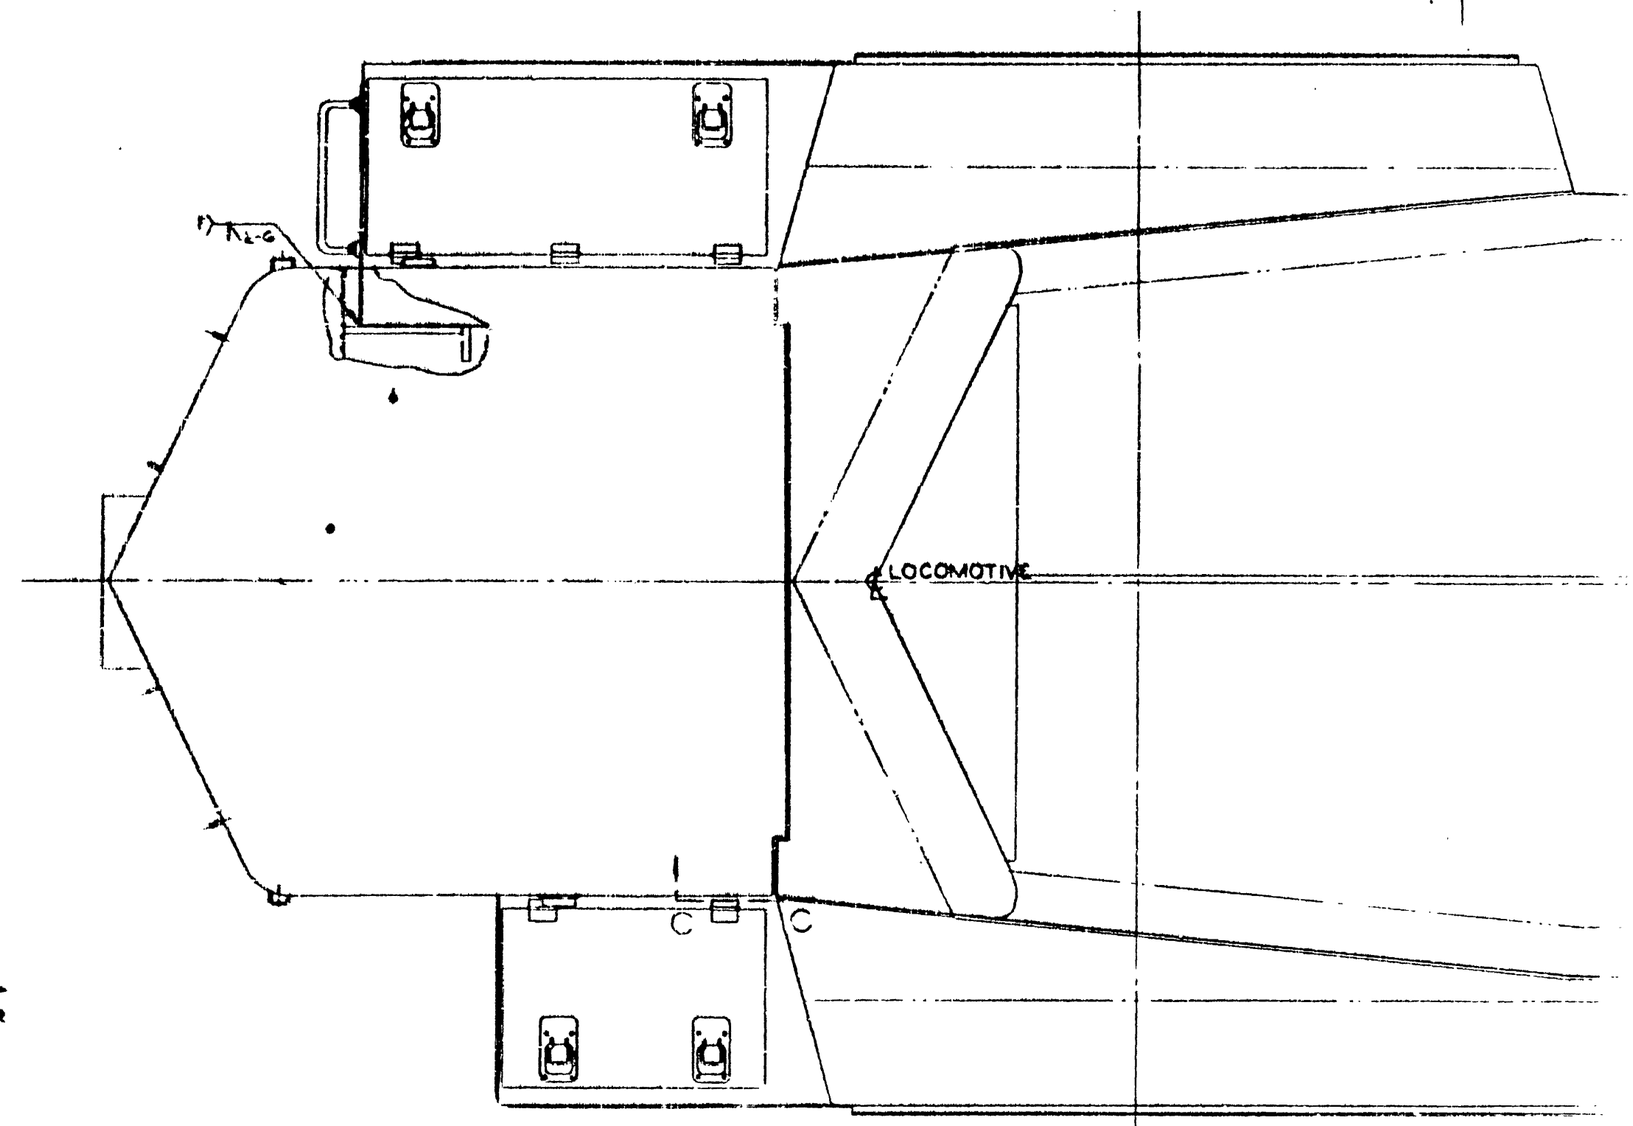

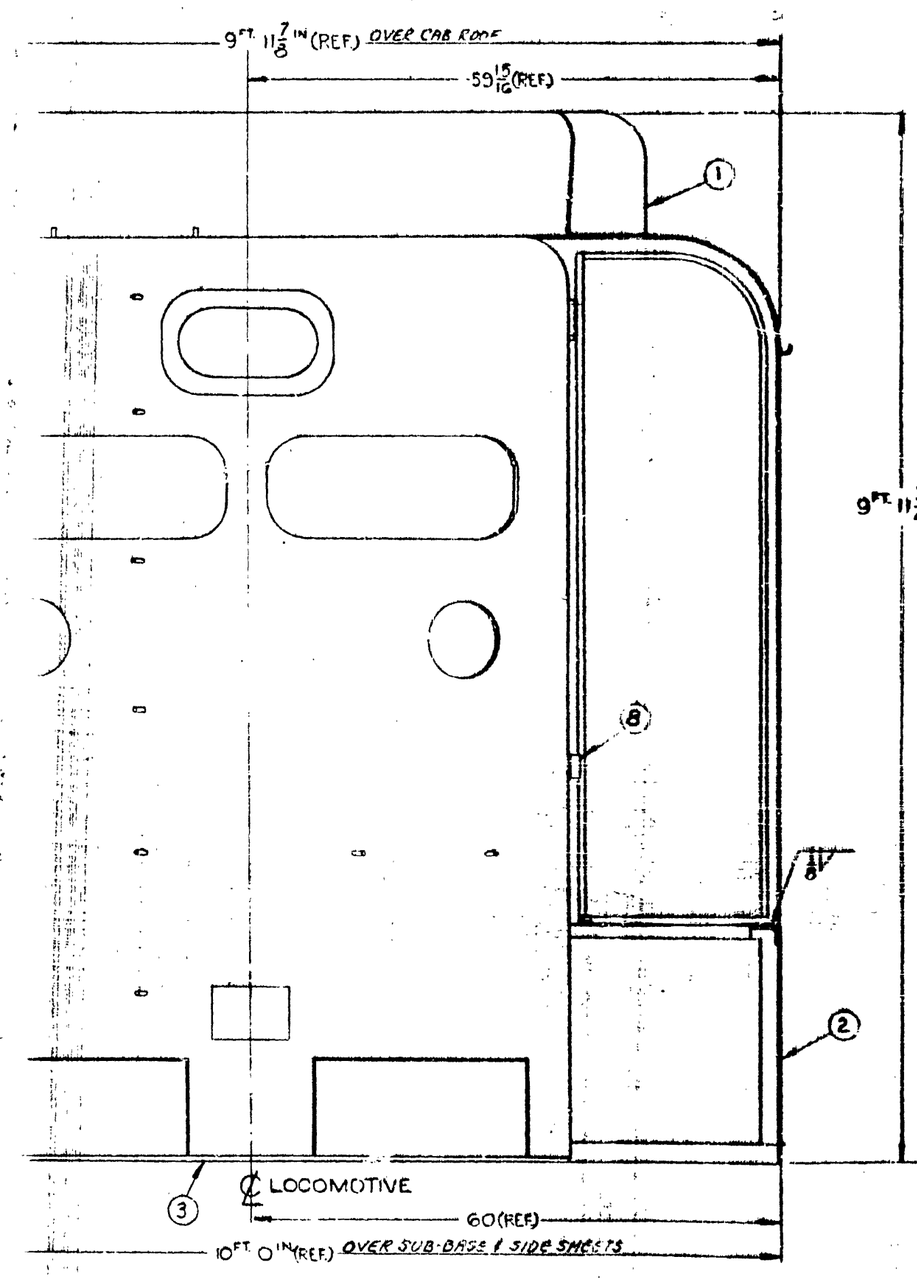

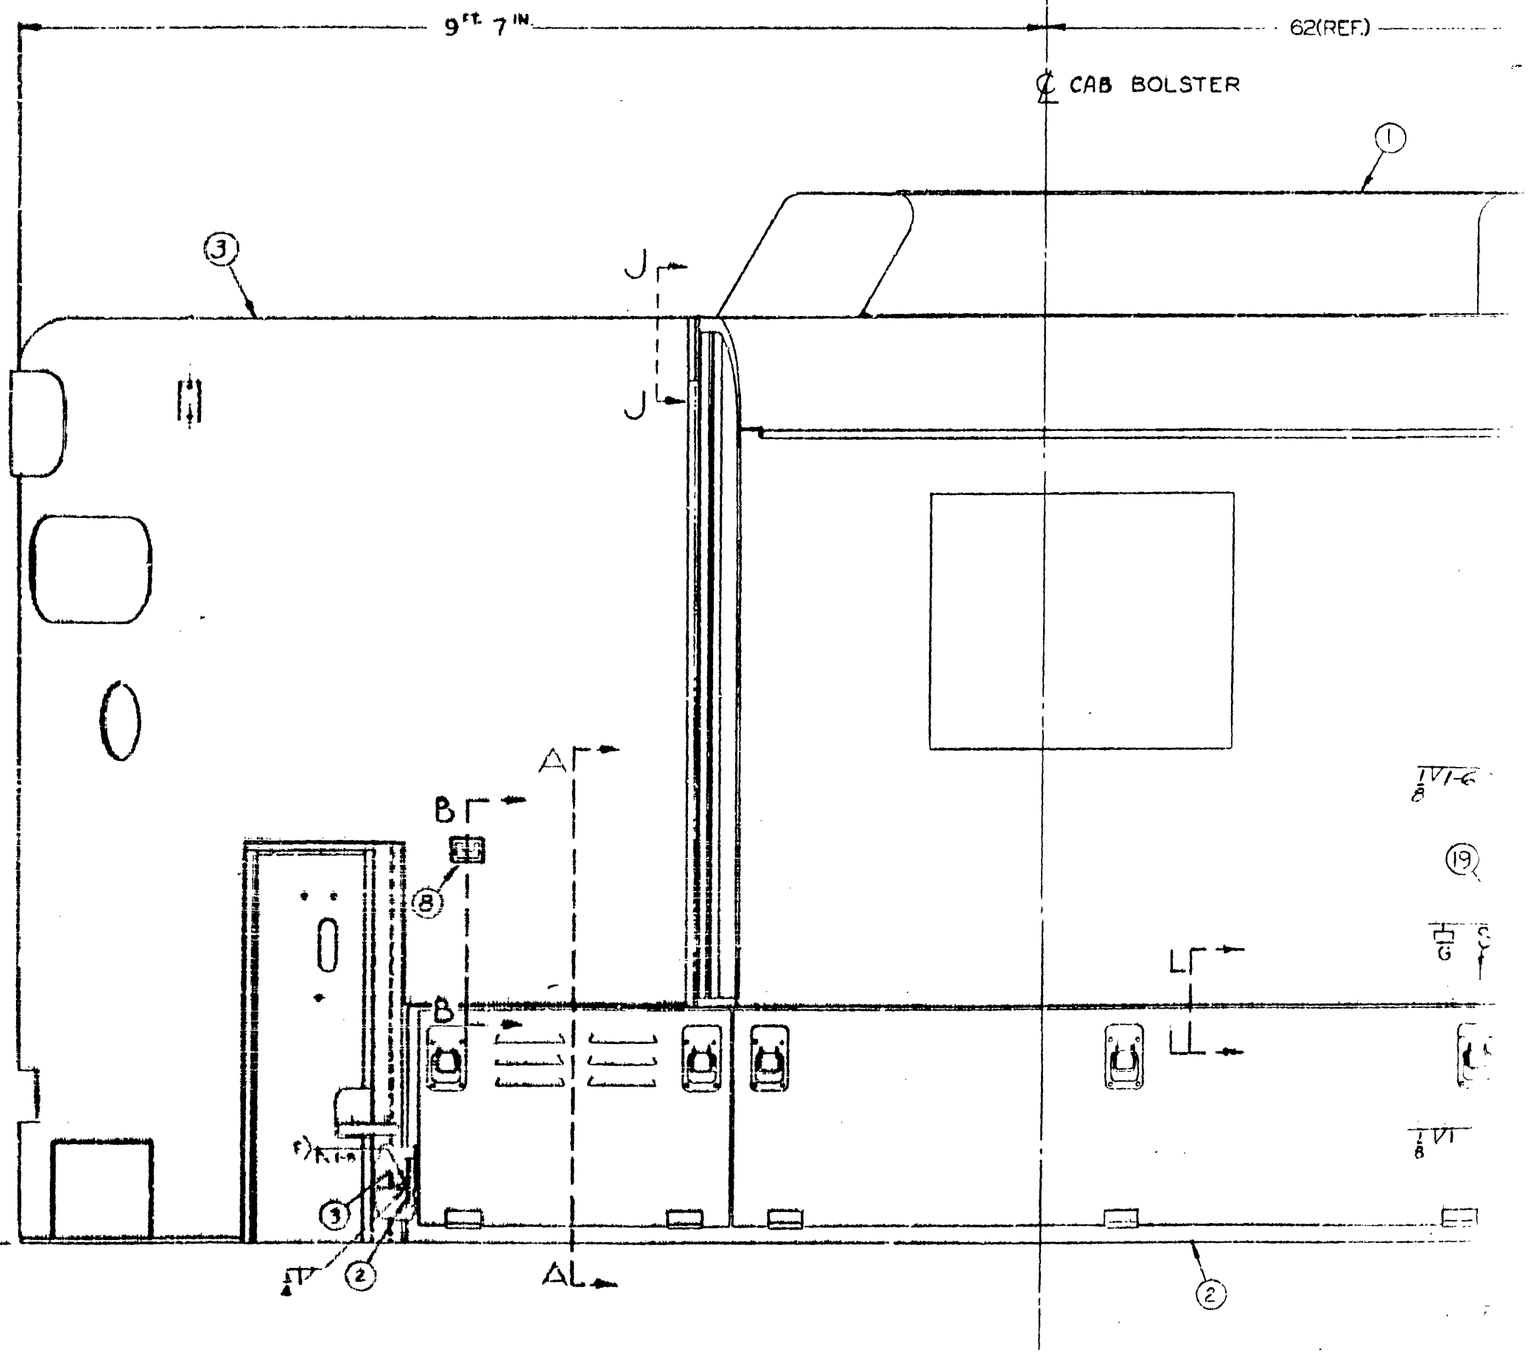

8319964

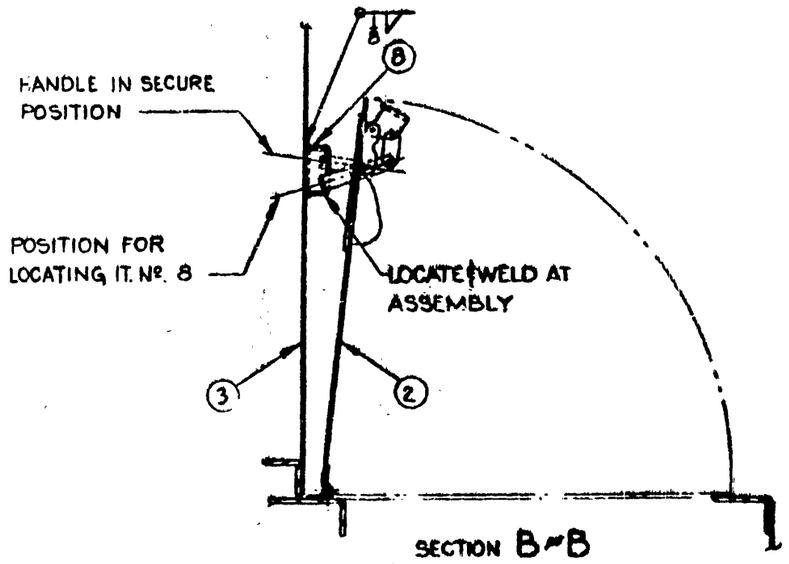

SECTION B-B
(TYPICAL APPLICATION OF DOOR CATCH FOR SUB-BASE DOORS)

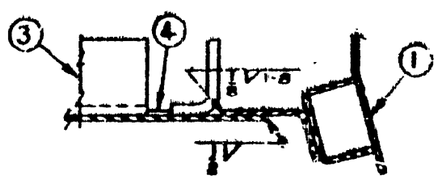

SECTION D-D

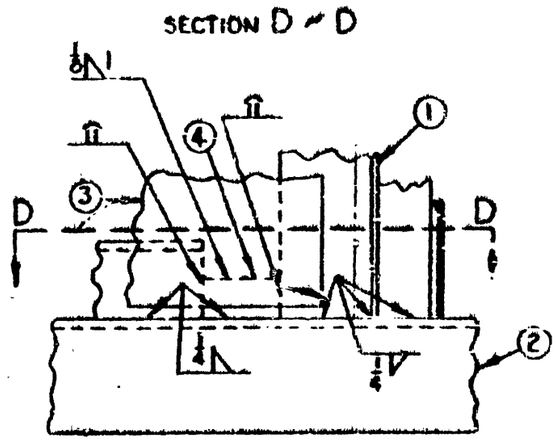

VIEW C-C

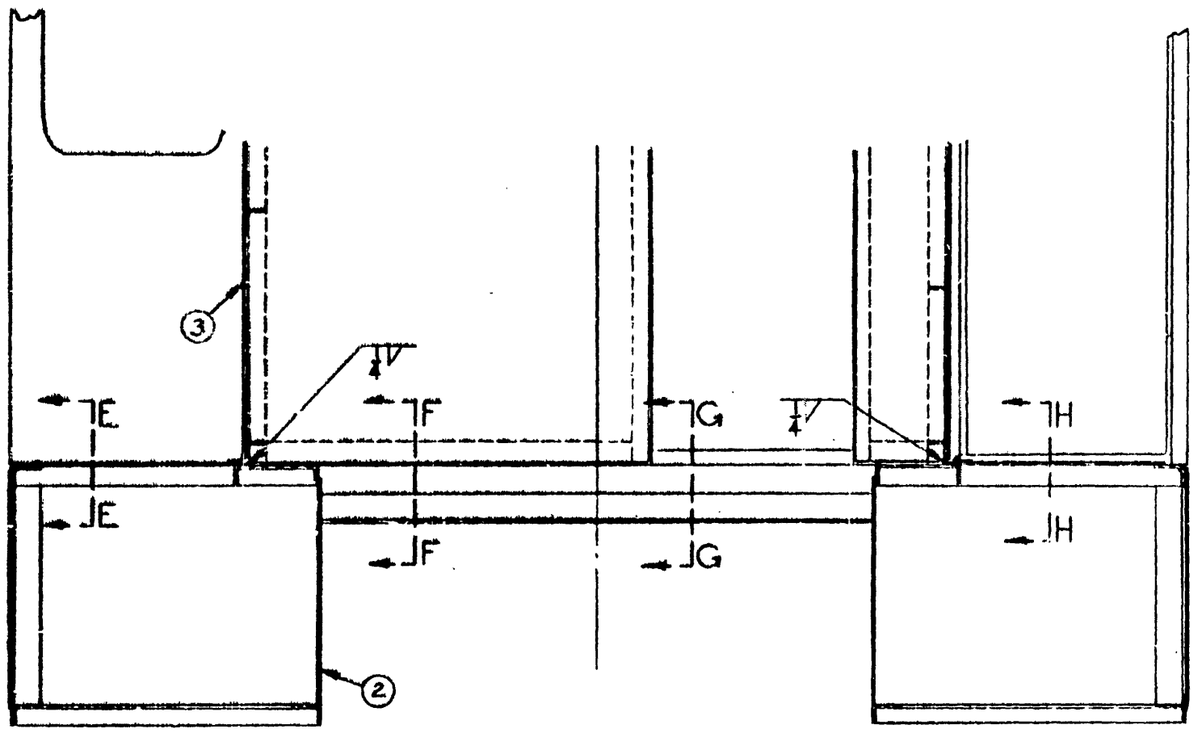

SECTION A-A



SECTION E-E



SECTION F-F



SECTION G-G

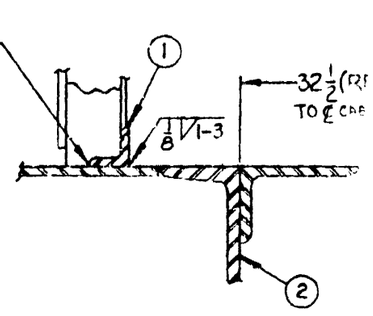

SECTION H-H

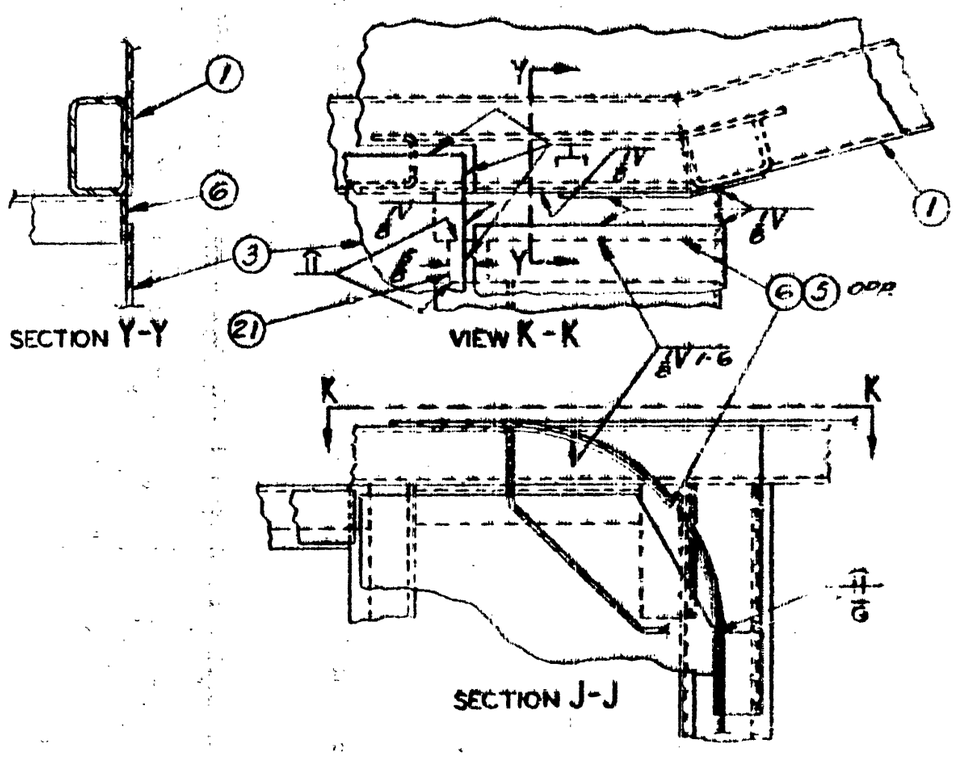

SECTION Y-Y

VIEW K-K

SECTION J-J

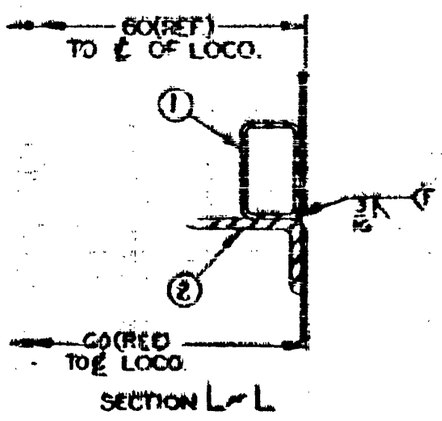

SECTION L-L

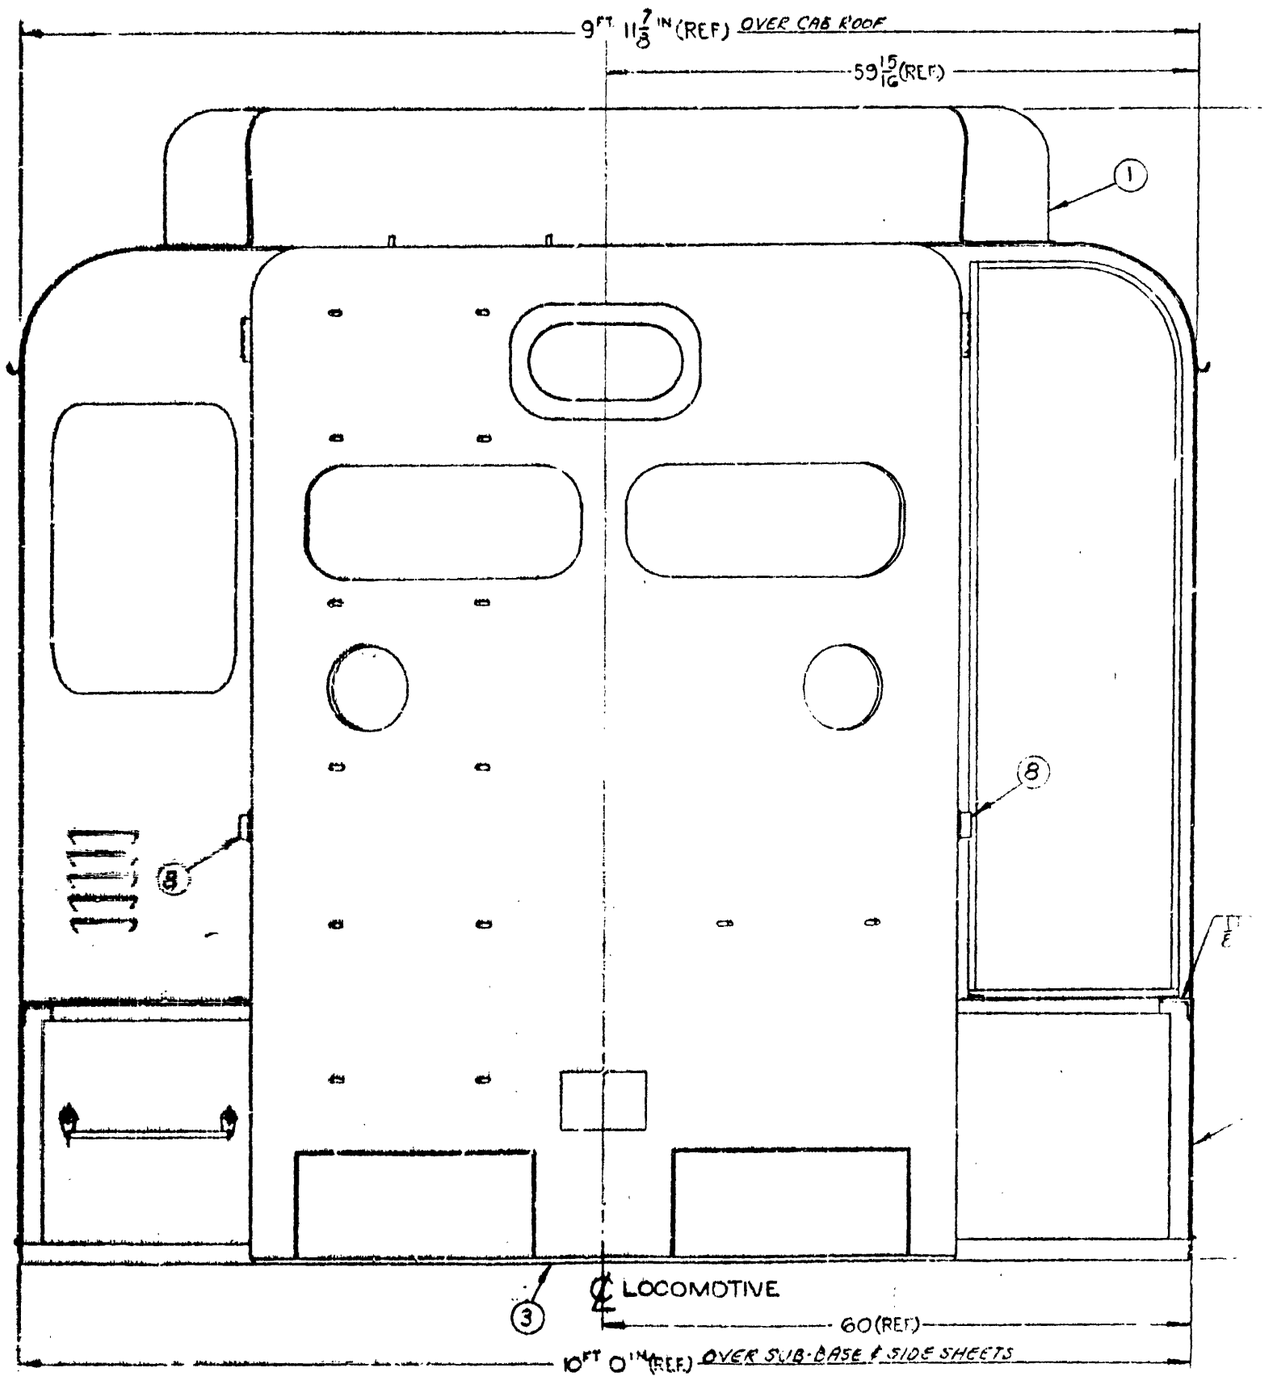

BREAK ALL SHARP CORNERS UNLESS OTHERWISE SPECIFIED.

COUNTERSINK ALL TAPPED HOLES 118° X ONE THIRD DEEP.

SURFACE FINISH SPECS. ARE IN ACCORDANCE WITH R.M. ENGR. STDS.

TOLERANCES ON ALL DIMENSIONS NOT SPECIFIED ON THE DRAWING TO BE IN ACCORDANCE WITH A.I.-2100