


· .			-		_
·	•		HANDIOLD	8279086	1
	5		MET-3M-HEMEX.SECF LOCK	272000	
.[_	2		8017-3/4-10 HEX. HO.	271612	Ŀ
j.	3		TEE	8314226	L
	24		80LT-1/2-13 HEN. HO.	179000	
;	4	,	NUT-1-8 HEX.SELF LOCK	8094563	G
.1_	4		9LOCK	8129112	I
L	4		EYE BOLT - I	8031891	G
	1		AMELE	8302765	G
Ļ	1		ANGLE	8302756	ī
.L	1		ANGLE	8302764	
1_	1		CHANNEL	8302763	
(_		CHANNEL	8302762	
'	山		ANGLE	8314704	
	2	8077994 - 12 - 10-1/2 IN	PIPE - 2		
,_	1		BAFFLE ASSEMBLY	8302761	Γ
	2		BAFFLE ASSEMBLY	8314346	
	1		BAFFLE	8302756	
- Barner or dell'arment delmarks an interestation communication and arment in the second	1	-	SHEET - ROOF	8302755	
			MadiBas Palet	PAGE 100.	7
LAM G MET STRICK KEET BEGOVE		ULLRICH 12036	WLECTRO-MOTIVE DIVISION OFFINAL MOTIVE DIVISION LA GRAPGE, ILLINOSS, U.S.A.		
CIPING WEERSONE TO THE PROPERTY OF THE PROPERT		E SIME NOTE	FAN HATCH, AS	ZEAB	Ä
PROJ 97467 GP-22	Ľ	1 H1761		DE2	7

NO. 8302536 PRIVE 2 DES

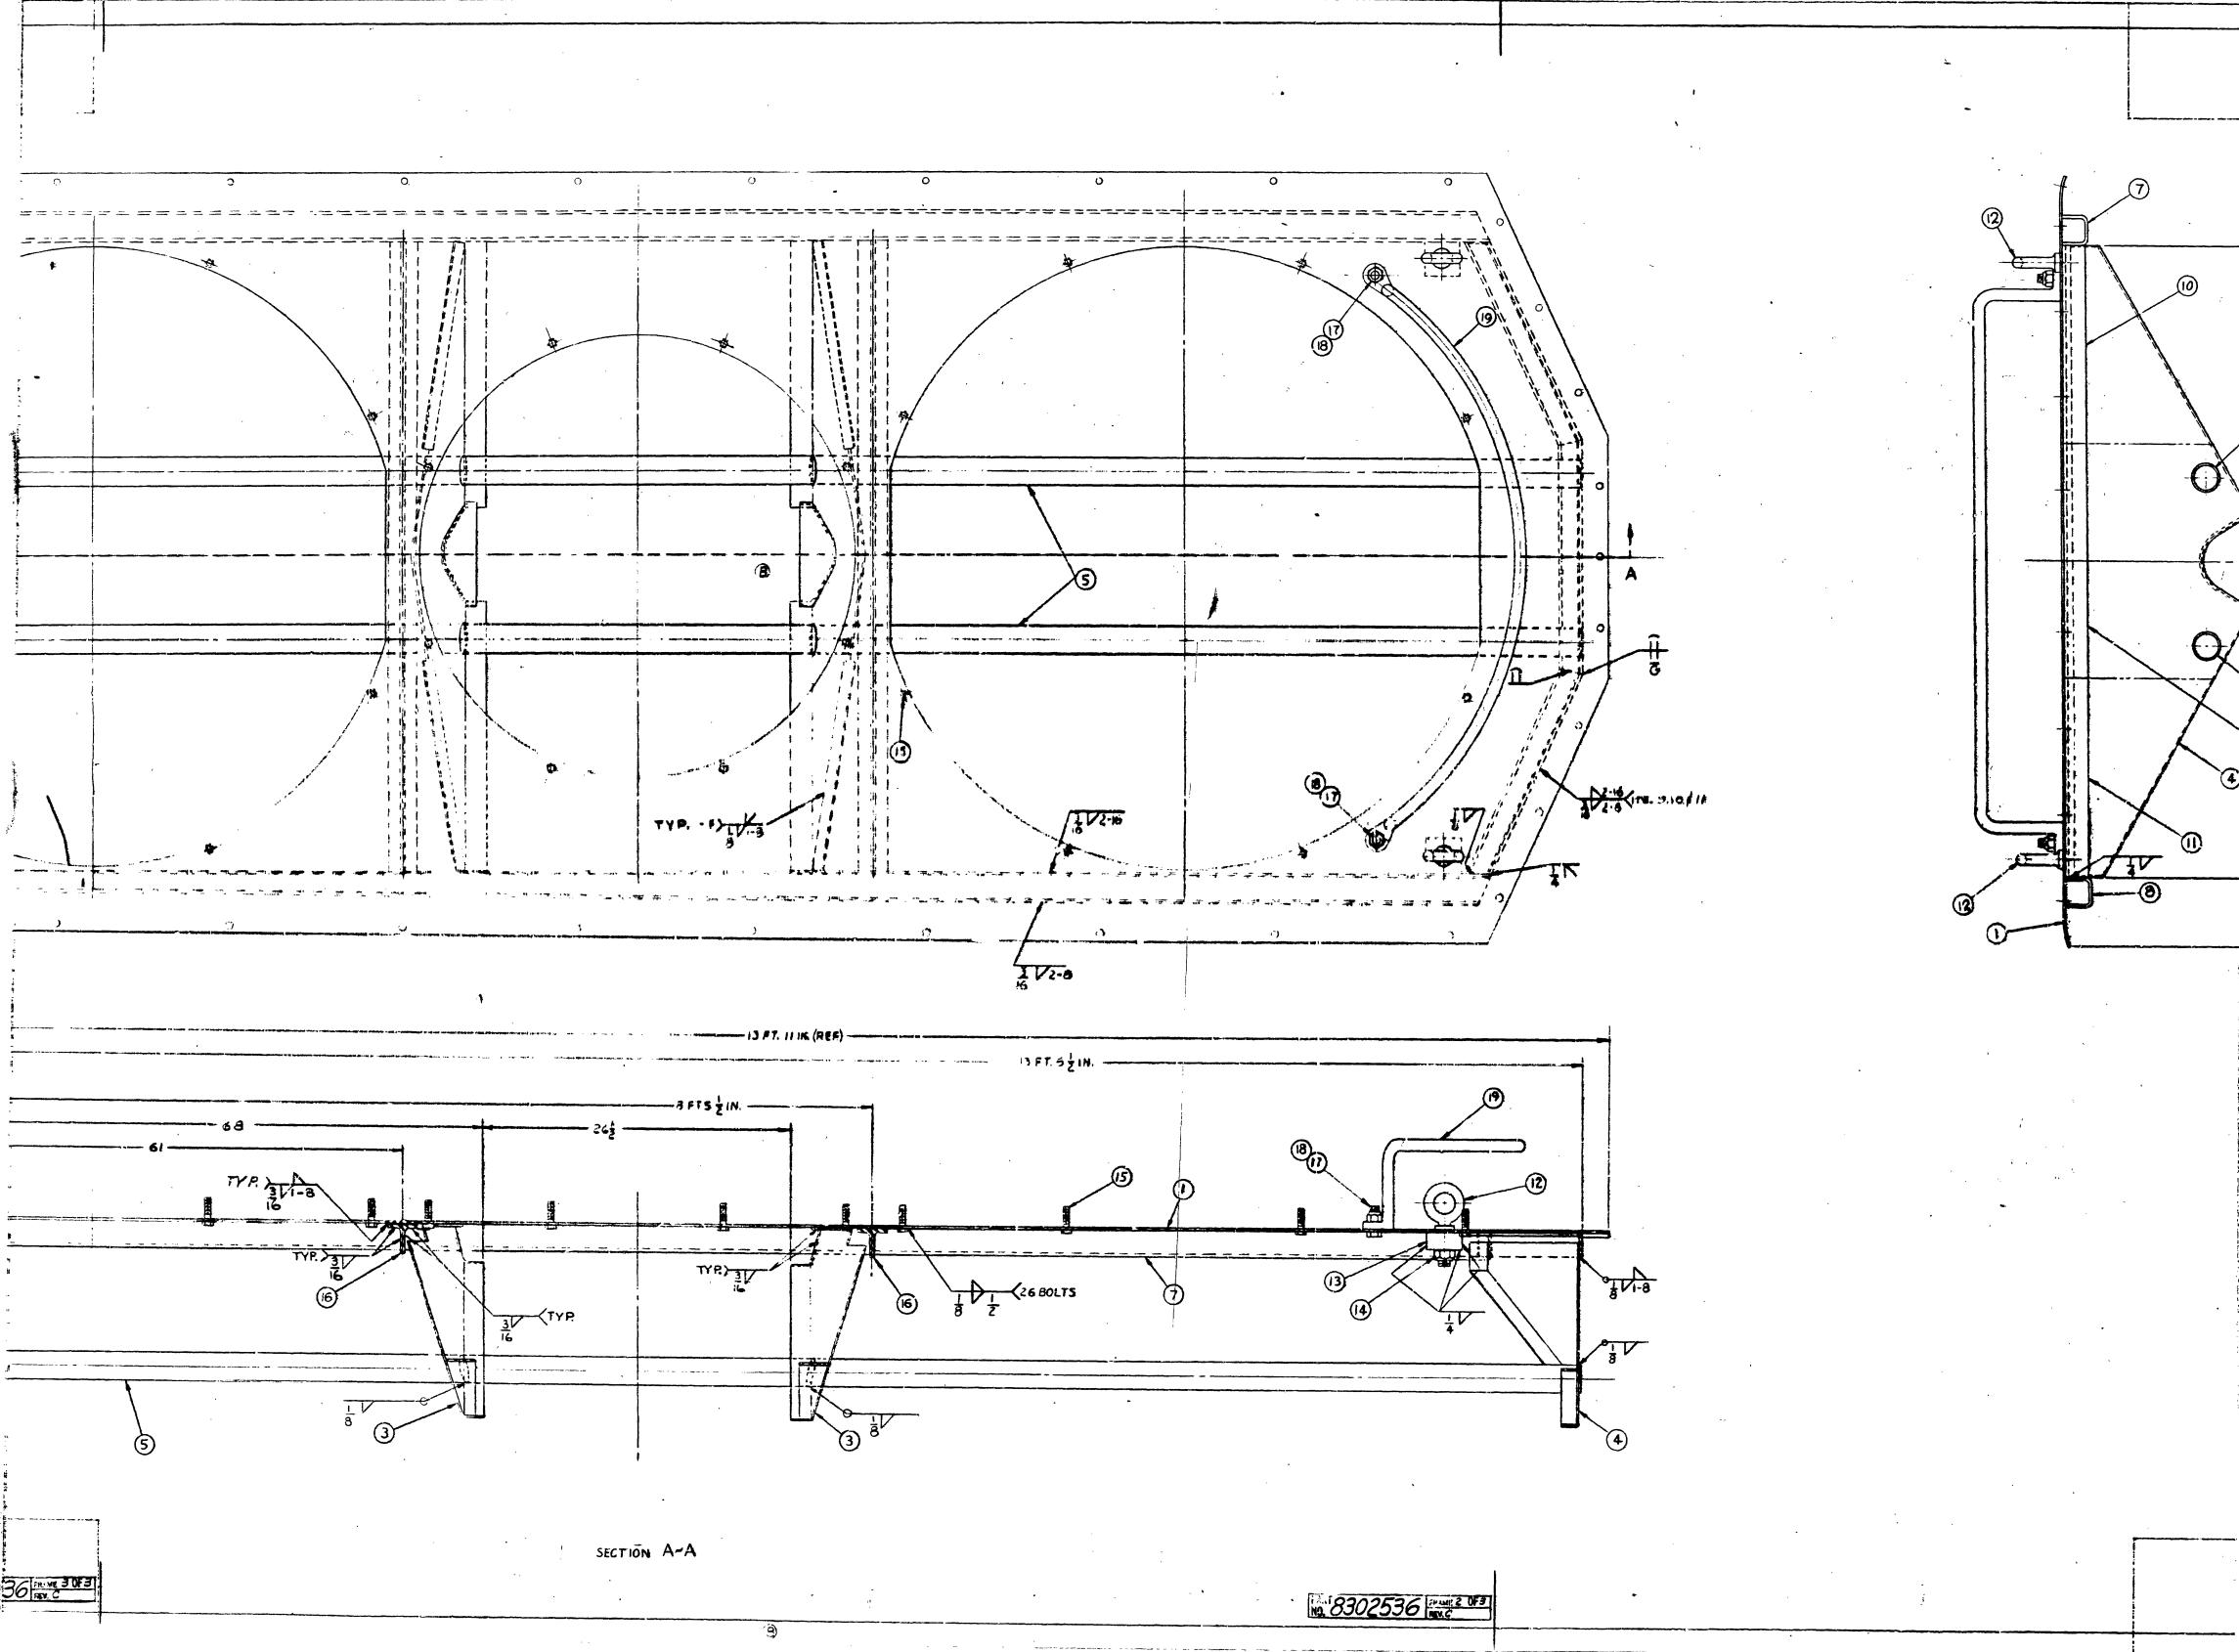

TYP. 311-3 1-4F 125 BREAK ALL SHARP CORNERS
UNLESS OTHERWISE SPECIFIED.
COUNTER! IN ALL TAPPED HOLES
118" X ONE THIND, DEEP.
SURFACE FINISH SPECS. ARE IN
ACCORDANCE WITH G.M. ENGS. STOS.
PERMISSIBLE VARIATION ON COMMON
FRACTION DIMENSIONS TO MACHINED
SURFACES TO BE = 010 UNLESS.
OTHERWISE SPECIFIED.
FABRICATION TOLERANCE: \$2
CASTING TOLERANCE: SECTION A-A CASTING TOLERANCE: FORGING TOLERANCE: NO. 8302536 FRAME 2 OF 3