



3) SPRING TO BE HOOKED IN SIXTH LINK OF CHAIN FROM JOINER

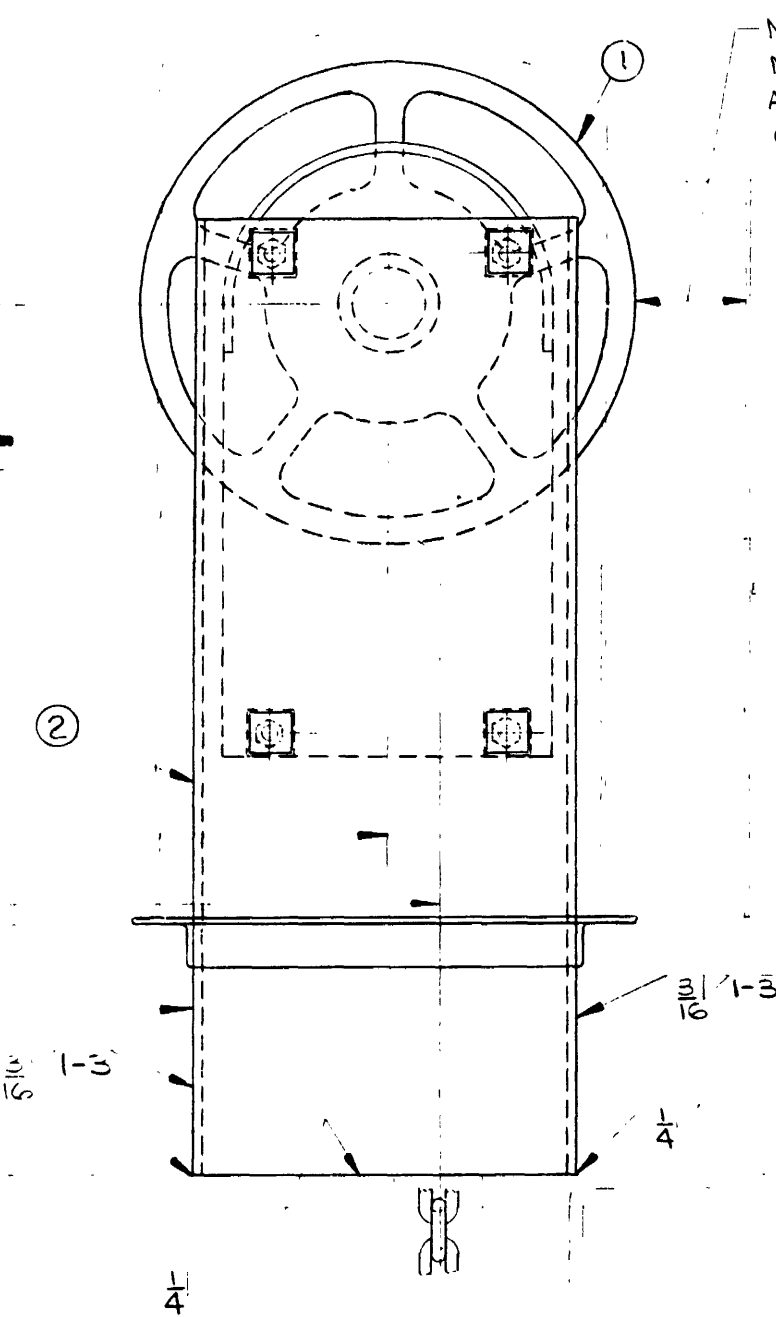

MINIMUM CLEARANCE OF 4 IN. MUST BE MAINTAINED ALL AROUND OUTSIDE PERIMETER OF WHEEL.

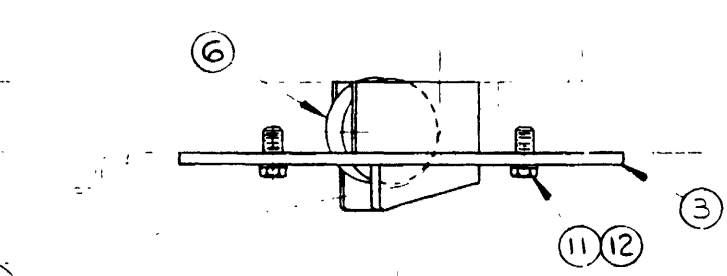

AXLE

NOTE:  
LUBRICATE ALL SHEAVE PINS AND BUSHINGS AT BEARING SURFACES WITH ITEM 17.

QTY	DESCRIPTION	PART NO.	REV.
1	BEARING GREASE		
1	CLEVIS	8335522	
1	COVER SHEET APPL	8333715	
1	PIN-3/8 COTTER	119401	
1	PIN-BRAKE	8223521	
1	WASHER-3/4 LOCK	103126	
1	BOLT 3/4 1J HEX HD	271609	
1	WASHER-1/4 LOCK	101119	
1	BOLT-1/4-20 HEX HD	17174	
1	RETAINER	8199089	
1	PIN	6276474	
1	SHEAVE ASSEMBLY	8100171	
1	SPRING	840780	
1	ANGLE	840780	
1	MOUNTING PLATE AS	8401577	
1	CHANNEL A 5" LY	8401577	
1	HAND BRAKE ASM	8336520	

REV.	DESCRIPTION	DATE	BY	CHK	APPV
1	17.1 TITLE REV'D	11/1/8	D		
2	17.16 PT. 15 WAS 17.15	11/1/8	D		
3	17.16 PT. 15 WAS 17.15	11/1/8	D		
4	17.16 PT. 15 WAS 17.15	11/1/8	D		
5	17.16 PT. 15 WAS 17.15	11/1/8	D		
6	17.16 PT. 15 WAS 17.15	11/1/8	D		
7	17.16 PT. 15 WAS 17.15	11/1/8	D		
8	17.16 PT. 15 WAS 17.15	11/1/8	D		
9	17.16 PT. 15 WAS 17.15	11/1/8	D		
10	17.16 PT. 15 WAS 17.15	11/1/8	D		

REV.	DESCRIPTION	DATE	BY	CHK	APPV
1	17.16 PT. 15 WAS 17.15	11/1/8	D		
2	17.16 PT. 15 WAS 17.15	11/1/8	D		
3	17.16 PT. 15 WAS 17.15	11/1/8	D		
4	17.16 PT. 15 WAS 17.15	11/1/8	D		
5	17.16 PT. 15 WAS 17.15	11/1/8	D		
6	17.16 PT. 15 WAS 17.15	11/1/8	D		
7	17.16 PT. 15 WAS 17.15	11/1/8	D		
8	17.16 PT. 15 WAS 17.15	11/1/8	D		
9	17.16 PT. 15 WAS 17.15	11/1/8	D		
10	17.16 PT. 15 WAS 17.15	11/1/8	D		

4° 34' TRUCK  
SWING

CL LOCO.

CL BOL. LON & HOOD

CL LOCO.

TOP OF SILL

CL AXLE

RELEASED

APPLIED

SPRING TO BE HOOKED IN SIXTH  
LINK OF CHAIN FROM JOINER

PLAN VIEW  
(ITEM 1 NOT SHOWN)

PEEN PROJECTING SPACER  
POINTS OF JOINER AT  
ASSEMBLY.

£ Loco.

Q BOL. - LONG HOOD

