

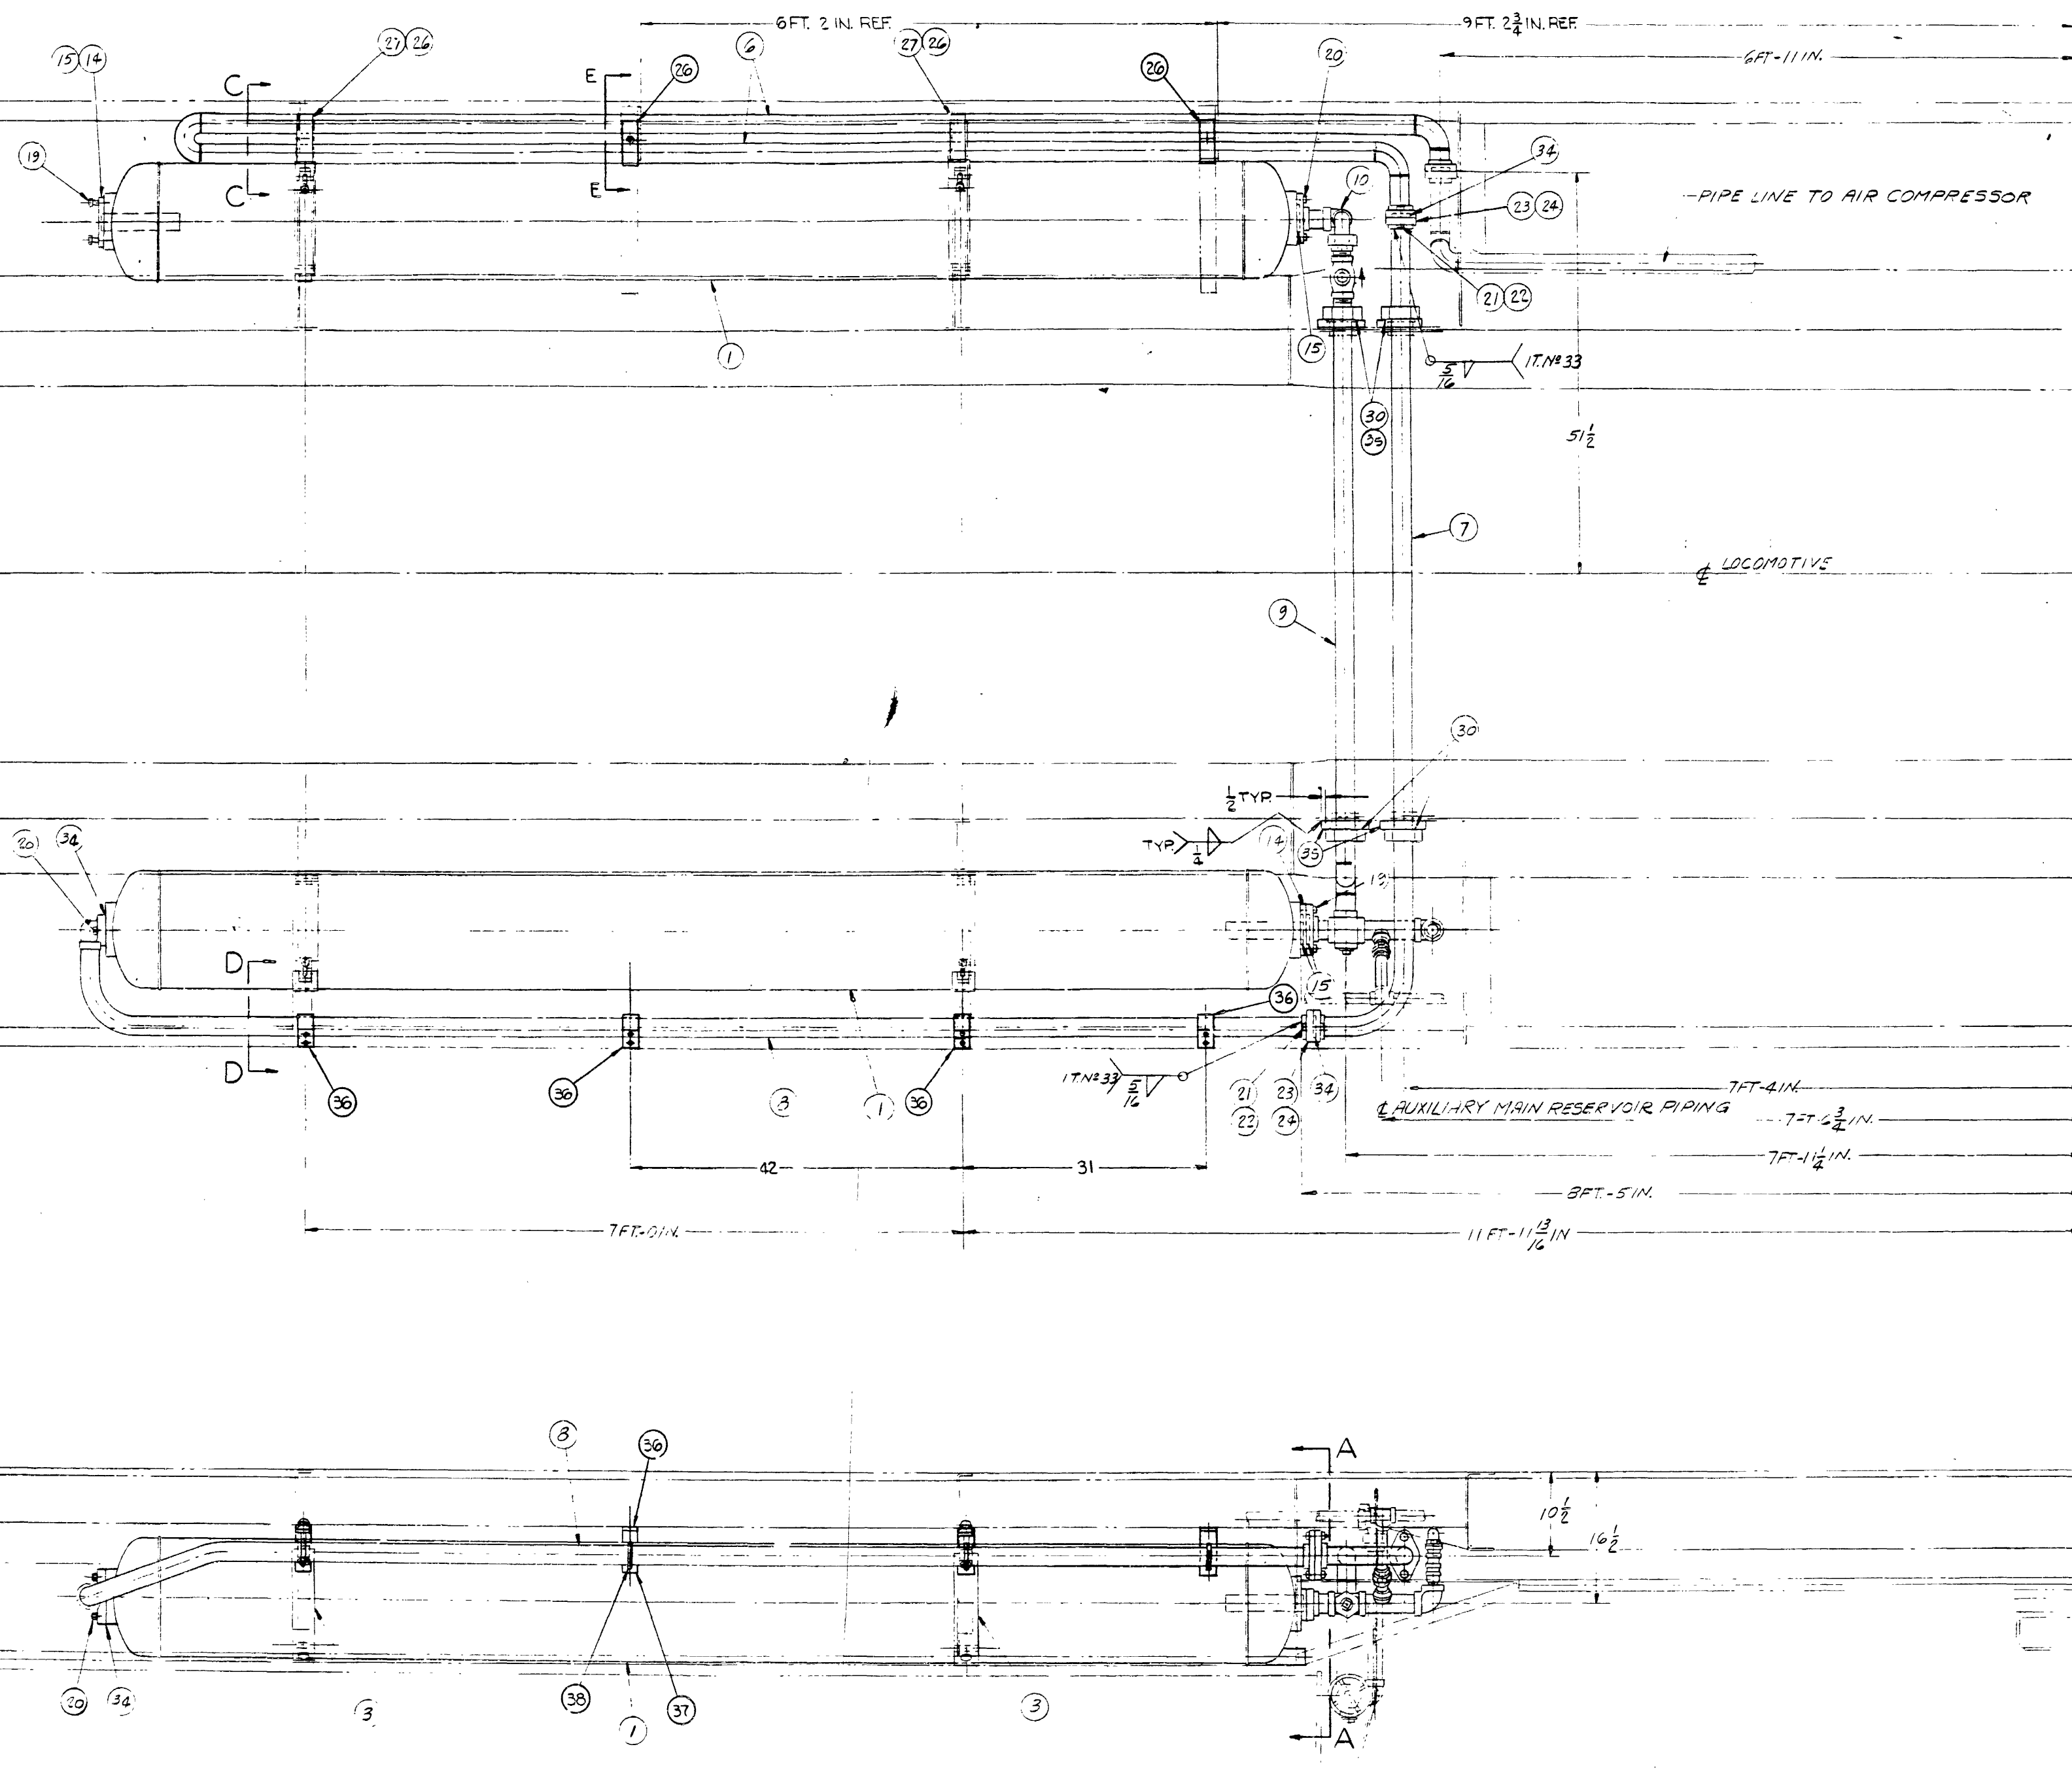


ON E#E


SILL

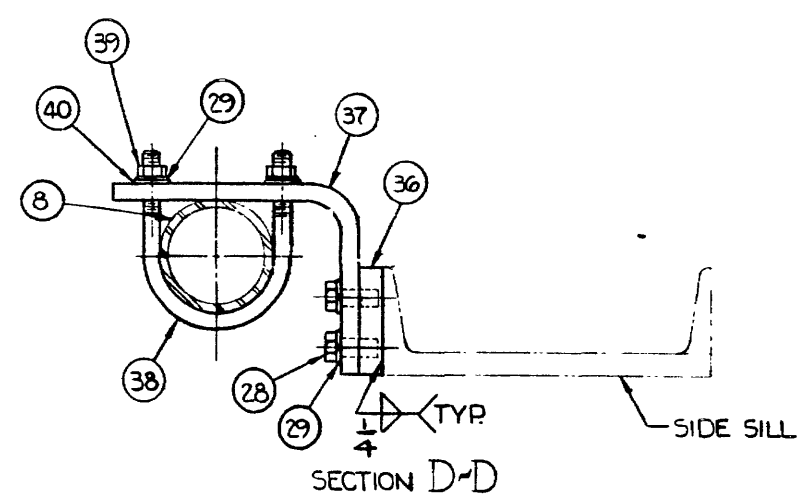

№ 2 BOLSTER

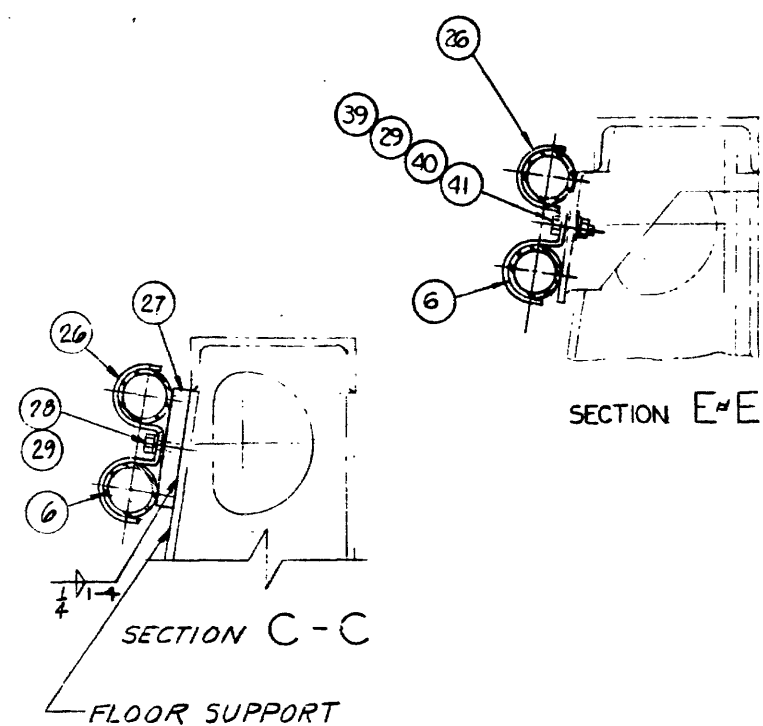

LOCATE IT. 36 TO SIDE SILL WHEN ITS
36, 37 & 38 ARE ASSEMBLED TO IT. 8

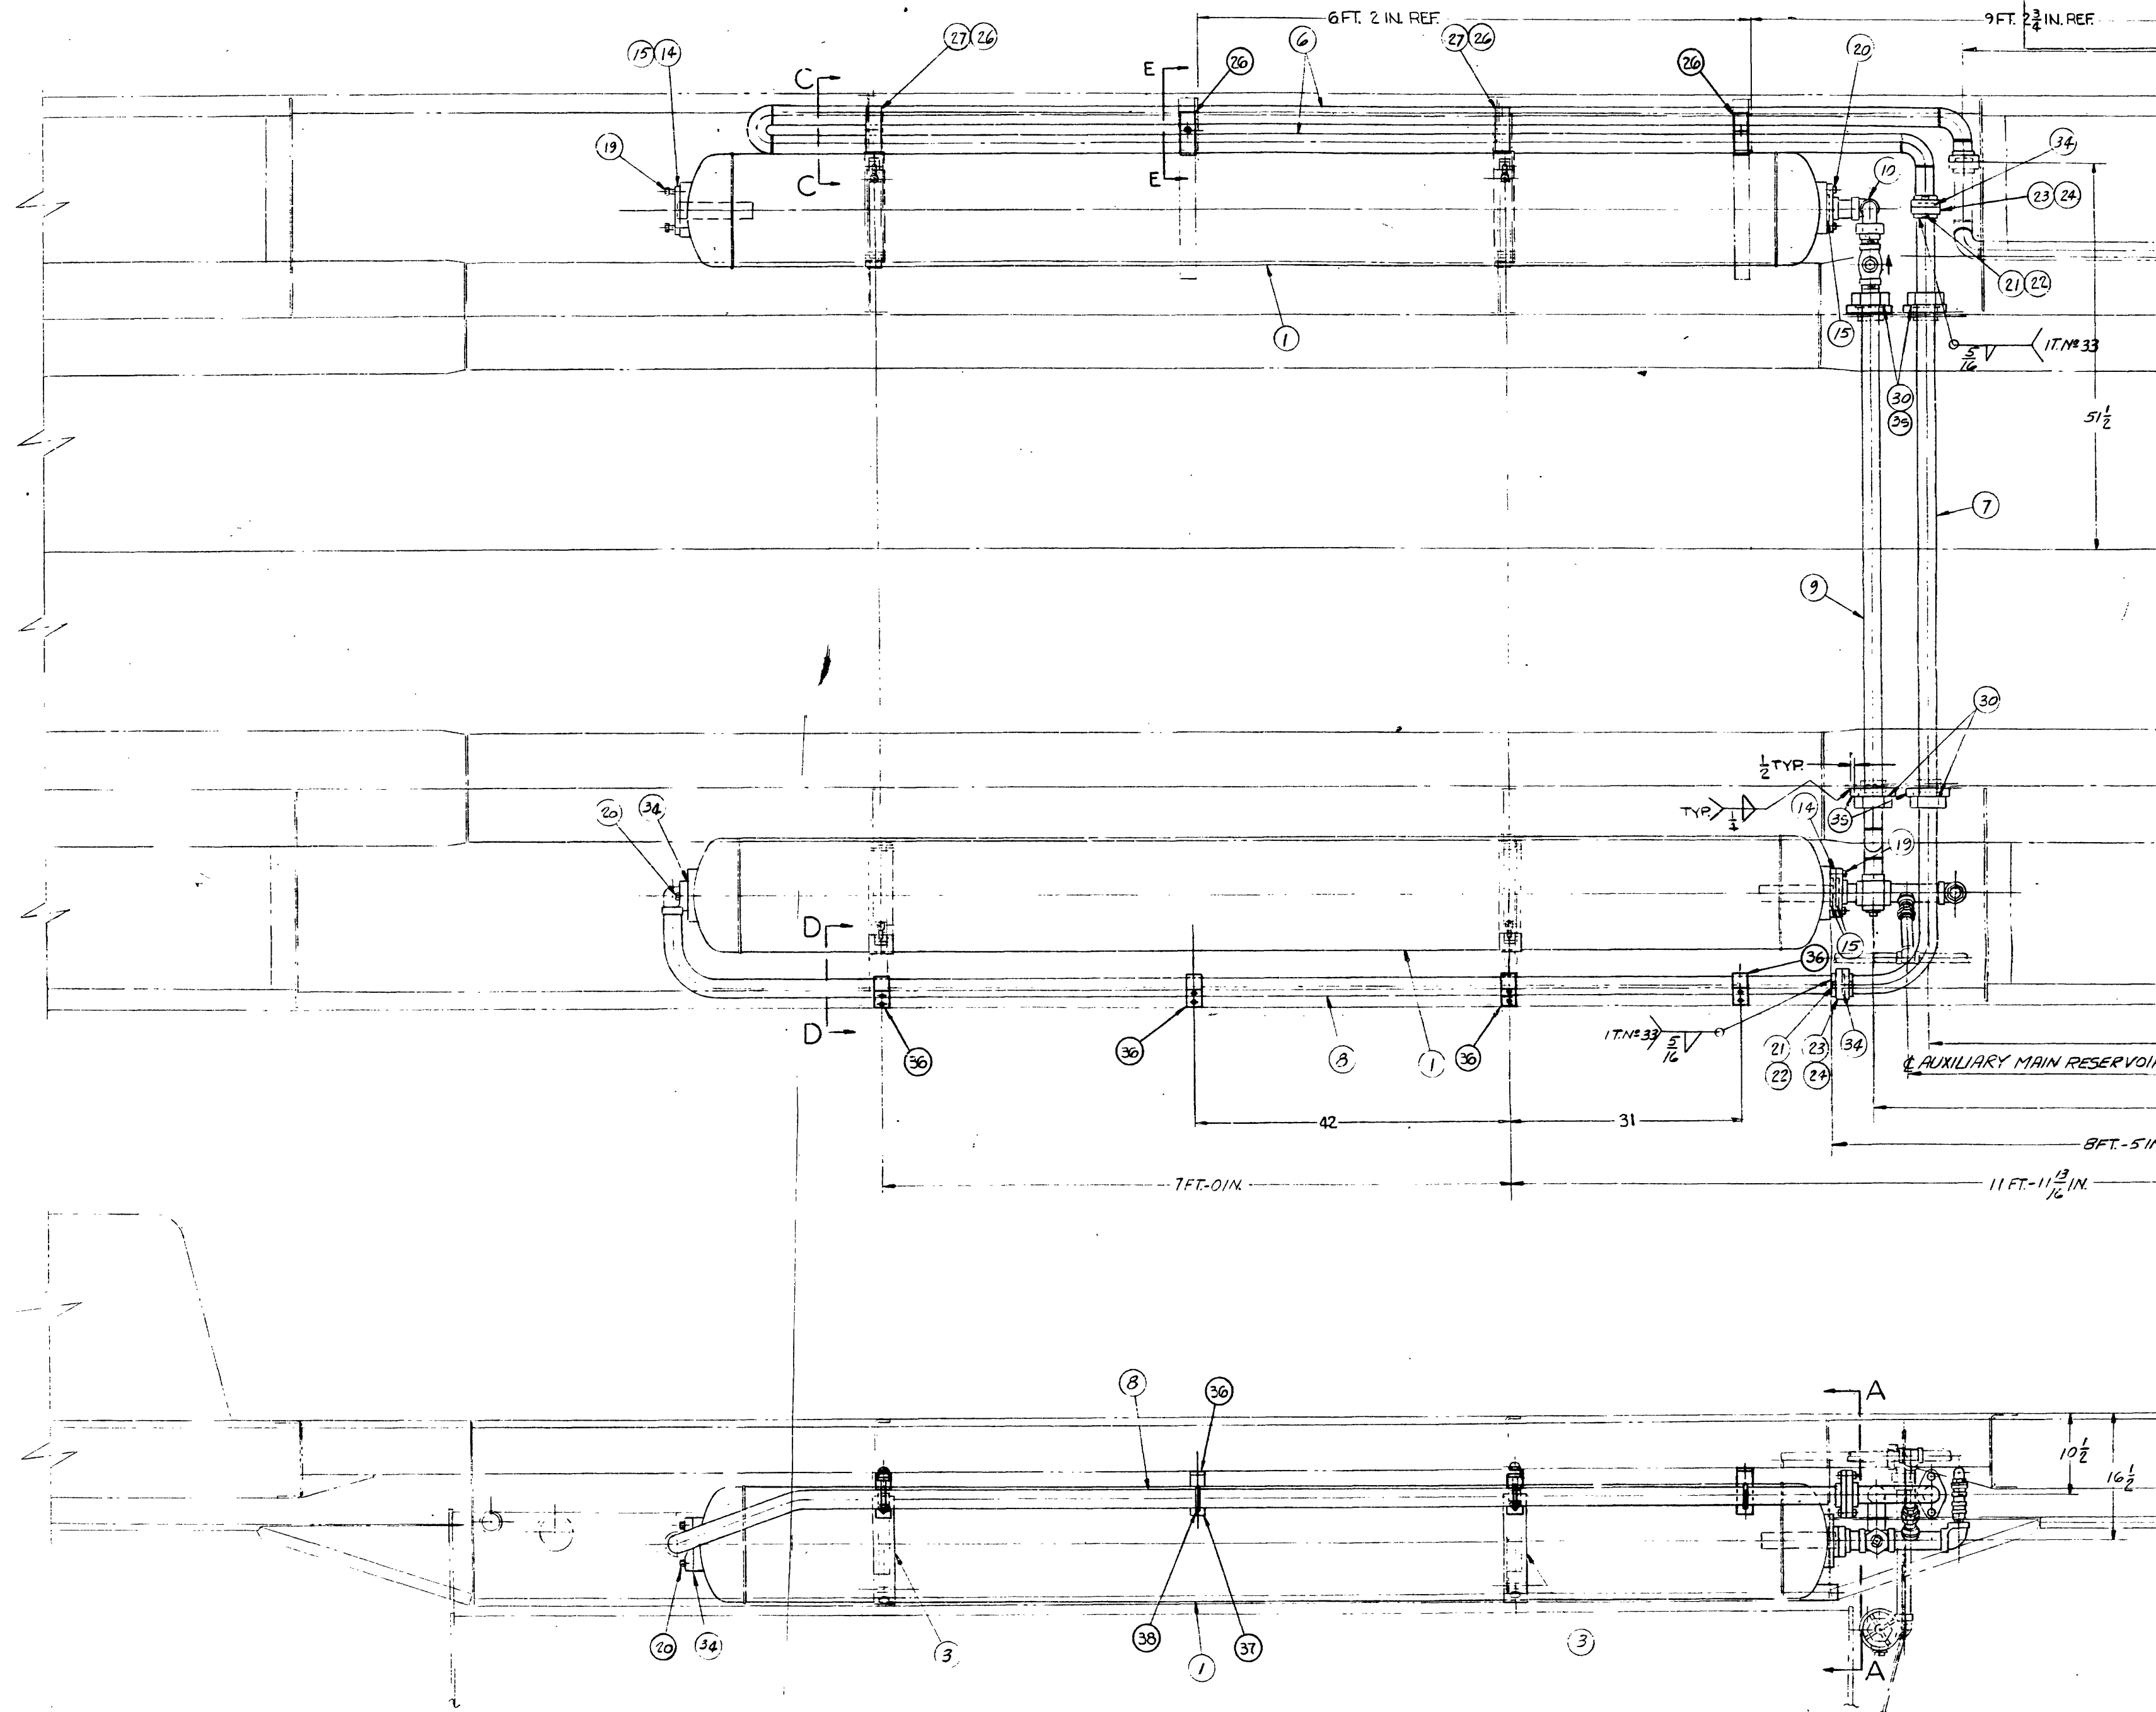

BREAK ALL SHARP CORNERS
UNLESS OTHERWISE SPECIFIED.
COUNTERSINK ALL TAPPED HOLES
1/16" X ONE THIRD DEEP.
SURFACE FINISH SPECS. ARE IN
ACCORDANCE WITH G.M. ENGR. STDS.
PERMISSIBLE VARIATION ON COMMON
FRACTION DIMENSIONS TO MACHINE