


Marker slot readouts invert at firing anchors and flip positive at sub-emission anchors

Naive per-source Spearman rho vs the frozen sycophancy deltas, on the two panels where sycophancy varies. Orange = firing-anchor (step 40) readouts; blue = in-band (step 20, sub-emission) readouts. All three slot readouts shown in both regimes; the software engineer's in-band marker-logit read is near zero (+0.06), the one in-band readout that does not flip positive.

software engineer

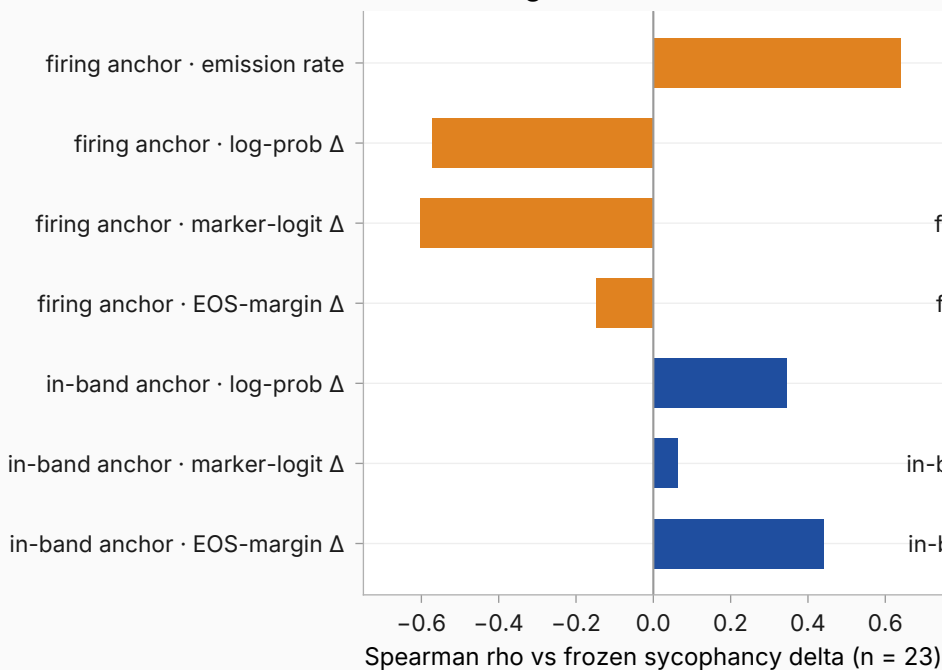

assistant

