


The same 16 Instruct adapters read two ways

corrected read recovers the install in-band on 16/16 cells; the mis-rooted read reproduces #664's floor

source marker log P(*), trained - base (nat)

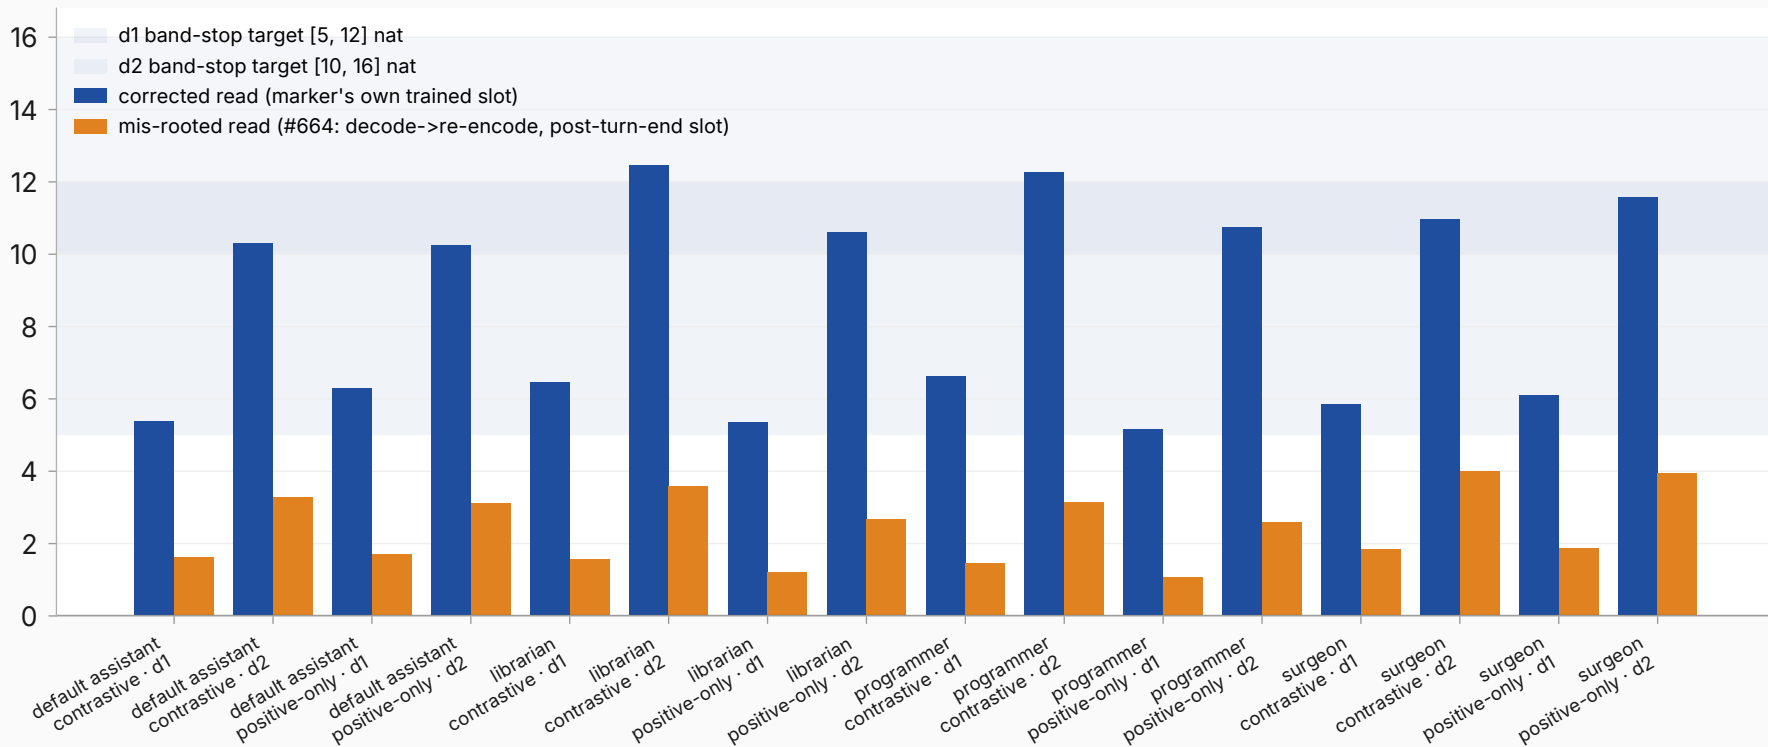

issue #734 corrected_reread (n=16 cells, #664 adapters)