
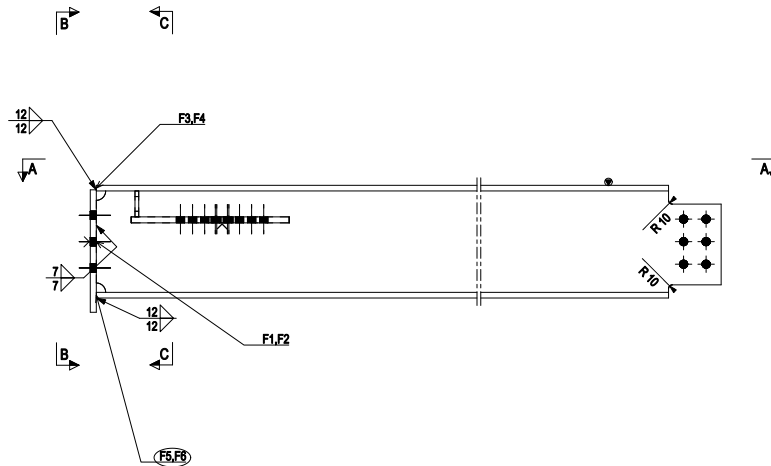
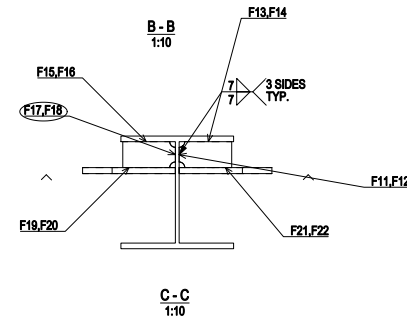



Length 长度 (mm)	Width 宽度 (mm)	Height 高度 (mm)	Part 件号	Line 行号	Qty 数量	Unit 单位	Sub Unit 子件号	Description 描述	Material 材料	Length 长度 (mm)	Width 宽度 (mm)	Height 高度 (mm)	Unit 单位	Weight 重量 (kg)	REMARK 备注
390	905	390	付件表	1	1	BE020		Beam							
1810.02.10.03.12	2	1		2	1		BE020	HW000300x10x15	Q355B	3148	G			282.27	
1810.02.10.03.12	3	2		3	2		p52	FL10x10	Q355B	140	G			1.46	
1810.02.10.03.12	4	1		4	1		p118	FL10x10	Q355B	326	G			12.28	
1810.02.10.03.12	5	2		5	2		p175	FL10x45.3	Q355B	580	G			43.16	
													TOTAL	336.18	

ASSEMBLY BOLT LIST (FOR 1 ASSEMBLY)					
Dia.	Grade	Pay Code	Length	No.	Site/Shop
20	A325M	G	C1	55	6 Site

(Mechanical galvanized only for DTI washer)

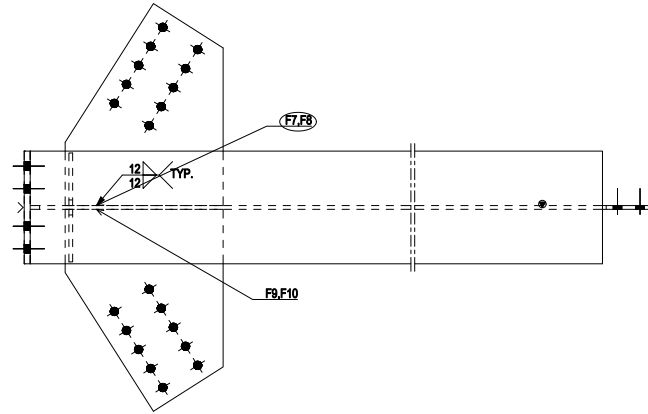

1	A-B/1-2/QNHD +17.200
QTY	MEMBERS LOCATION

1 Beam BE020

1. ACCUMULATIVE DIMENSIONS ARE TAKEN FROM THE "0" LINE. 累积尺寸均是按照“0”开始计算。
2. ALL 90-DEGREE CUTS WILL HAVE A RADIUS OF 0.25 IN. 所有90度切口均要有0.25英寸的圆角。
3. ALL DIMENSIONS TAKEN FROM THE FACE OF THE PART. 所有尺寸均从零件的端面开始。
4. ASSEMBLY MARK TO BE STAMPED ON THE FACE WHERE INDICATED THERE. 零件号要在指定位置打上。
5. * DENOTES THE TOUCH FACE OF MEMBERS, SHOP MUST STOP IT. * 为外接触面,工厂必须打止。
6. ALL THE DIAMETER OF SCALLOP IS 23mm (0.91 IN). 所有圆角槽的直径都是23mm, 英寸0.91。
7. ALL WELDS MUST BE CONTINUOUS, N.O.G. 所有焊缝必须是连续的, 无气孔。
8. END WELDS OF SHIM PILETS MUST BE PROVIDED BY WELDED CONNECTIONS. 衬垫末端焊缝必须是焊接的。
9. TIGHTENING TORQUE SHALL BE PER-RECORD TO SUBMITTAL FROM THE PERMANENT SET. 紧固力矩要符合永久紧固力矩要求。

[illegible]