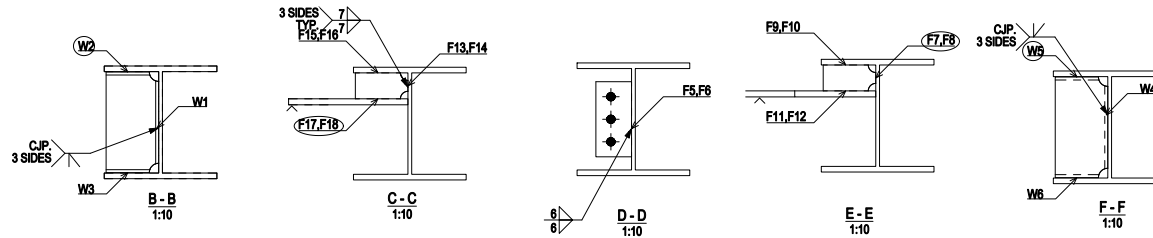
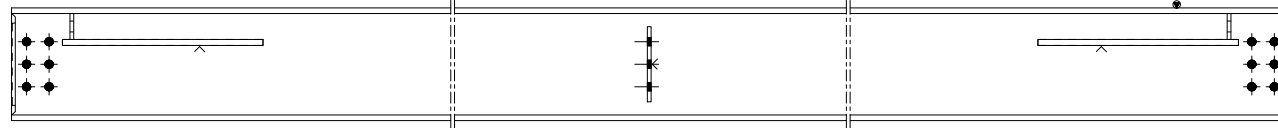


ASSEMBLY BOLT LIST (FOR 1 ASSEMBLY)					
Dia.	Grade	Pay Code	Length	No.	Site/Shop
20	A325M	G	C1	55	12

(Mechanical galvanized only for DT1 washer)

1 Beam BE022

1. ACCUMULATIVE DIMENSIONS ARE TAKEN FROM THE "0" LINE. 累积尺寸均从基准"0"开始测量。
2. ALL JOBS OR FITTINGS CUTS WILL HAVE A MINIMUM OF 1/8" DIA. 所有管口或附件切口最小直径为1/8英寸。
3. ALL BOWBARS MUST BEET TO BE PREPARED BY ACETON 8-4-41. 所有弓形管必须用丙酮8-4-41处理。
4. ASSEMBLY MUST BE TO SKIMPED ON THE FACE WHEN INDICATED THERE. 零件装配时 按图要求。
5. "O" DENOTES THE TOUCH FACE OF MEMBERS, SHOWN BY THAT THICK. "O"为接触面, 在图中用粗实线表示。
6. ALL THE DIAMETER OF SCALLOP IS 23mm DIA. 所有图中所示的圆角直径为23mm, 除非另有说明。
7. ALL WELDS SHALL BE CONTINUOUS U.G.O. 所有焊缝必须是连续的全熔透焊缝。
8. MIN. WELDS OF 3MM FILL WELDS SHALL BE PROVIDED IN FILLMENT CONNECTIONS. 对接全熔透焊缝中, 在坡口内, 至少应提供3mm的填充焊缝。
9. TIGHTENING KILL TO BE USED TO CORRUPT TO CORRUPT IN THE FILLMENT KILL. 在填充焊缝中, 应使用紧口焊。

[illegible]