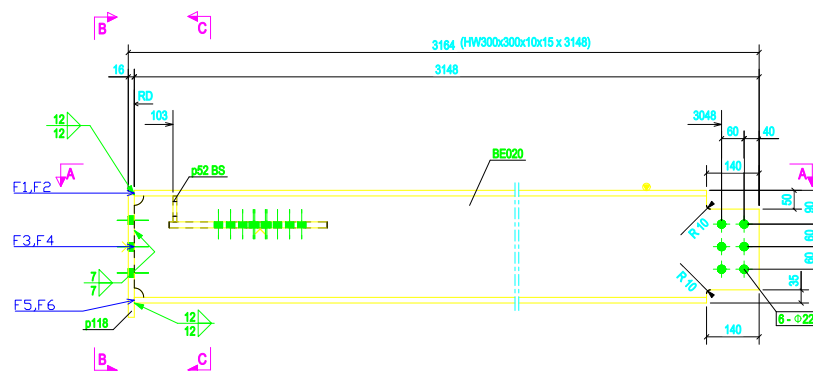
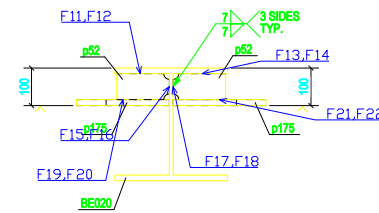



ASSEMBLY BOLT LIST (FOR 1 ASSEMBLY)					
Dia.	Grade	Pay Code	Length	No.	Site/Shop
20	A325M	G	C1	55	6
(Mechanical galvanized only for DT1 washer)					

1 Beam BE020

1. ACCUMULATIVE DIMENSIONS ARE TAKEN FROM THE "0" LINE. 累积尺寸必须参照"0" 开始测量。
2. ALL AS-OR-EQUIVANT CUTS WILL HAVE A MINIMUM OF 2mm U.A.O. 所有等同或类似之切面，其公差必须为2mm。
3. ALL DIMENSIONS THIS SHEET TO BE PREPARED (H1-AC210-04-01) 此图面所有尺寸之公差必须为H1-AC210-04-01。
4. ASSEMBLY MUST BE STAMPED ON THE FACE WHERE INDICATED THERE. 零件号必须在指定位置打上。
5. "X" DENOTES THE TOUCH FACE OF MEMBERS. (DO NOT MARK THIS) "X" 为接触面之符号，不可在此处打任何符号。
6. ALL THE DIAMETER OF BOLLAR IS 25mm U.A.O. 所有直径为25mm之柱头，其公差必须为2mm。
7. ALL WELDS SHALL BE CONTINUOUS U.A.O. 所有之焊接必须连续，其公差必须为2mm。
8. WELD BEADS OF 3MM PITCH WELD SHALL PROVIDED BY WELDED CONNECTIONS. 所有尺寸必须按照图面尺寸之焊接，其公差必须为3mm。
9. TOP SURFACE SHALL BE USED TO DETERMINE IF THE CONNECTION IS ON THE PERMITTED LVL. 顶面必须用来判定连接是否在许可之楼层上。

[illegible]