


ASSEMBLY BOLT LIST (FOR 1 ASSEMBLY)					
Dia.	Grade	Pay Code	Length	No.	Site/Shop
(Mechanical galvanized only for DTI washer)					



		PURCHASER'S PERMISSION TO PROCEED OR REVIEW TAKEN ON VENDOR PRINTED SHALL NOT RELIEVE VENDOR FROM ITS RESPONSIBILITIES UNDER PURCHASE ORDER.	
RETURN TO VENDOR		RESPOND BY	
☐	1 REVISE AND RESUBMIT		
☐	2 TO BE ISSUED AS FINAL PROVIDED COMMENTS ARE INCORPORATED		
☐	3 NOT COMMENT - FINAL ISSUE		
☐	4 FOR INFORMATION ONLY		


QatarEnergy LNG
THIS DOCUMENT IS PROPERTY OF QATARENERGY LNG. THE DRIVING OR INTERNAL, DESCRIBED THEREON MAY NOT BE COPIED OR DISCLOSED IN ANY FORM OR MEDIUM TO THIRD PARTIES, OR USED FOR OTHER THAN THE PURPOSE FOR WHICH IT HAS BEEN PROVIDED, IN WHOLE OR IN PART IN ANY MANNER EXCEPT AS EXPRESSLY PERMITTED BY QATARENERGY LNG.

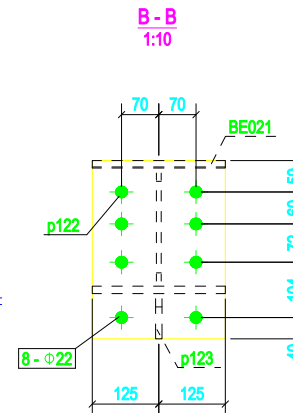

United Steel Structures, Inc.

COMPANY CONTRACT NO.:	LTGCNFS666821	CONTRACTOR JOB NO.:	N/A
P.O.:	215777C008-00000-PO-1800-20301-NFS520		
REQUISITION NO.:	NFS_EPC-TECC-ST-REQ-20301		
EQUIPMENT NAME:	PACKAGE - III- STEEL STRUCTURES (Offsite Area)		
TAG NO.:	361-RIC3210-S-01		
VENDOR NAME:	UNITED STEEL STRUCTURES LTD.		
DOCUMENT CLASS:	3		
VENDOR DOCUMENT NO.:	5720301-02048		

TITLE	INLET AREA STEEL STRUCTURE DRAWING 361-RC3210-S-01-BE021
-------	--

SCALE		PROJECT NO. LTC/CNFS/5498/21		
PROJECT	PROJECT DOCUMENT NO.	SHEET No.	SIZE	REVISION
NFS	5498_21-ST20301-02045	1	A3	00

1. ACCUMULATIVE DIMENSIONS ARE TAKEN FROM THE "TOP LINE". 累积尺寸是从顶部“TOP LINE”开始计算。
2. GAS BAR RESTRAINT CUTS MUST HAVE A RADIUS OF 15mm U.L.O.. 气体棒限位切口必须具有15mm U.L.O.的圆角半径。
3. ALL SURFACES THIS SHEET TO BE PREPARED (SEE [RC-320-0-01](#) AND [RC-320-0-01](#)). 本图纸的所有表面都要按照[RC-320-0-01](#)和[RC-320-0-01](#)进行准备。
4. ASSEMBLY MARKS TO BE STAMPED ON THE FACE WHERE INDICATED THERE. 零件号/代号 要标记在图上。
5. "P" DENOTES THE TOUCH FACE OF MEMBERS, SHOP MUST SPOT THIS. "P" 表示接触面, 工厂必须点焊。
6. ALL THE DIAMETER OF SCALLOP IS 25mm U.L.O.. 所有圆角处的半径都是25mm, 圆角有要求。
7. ALL WELDS SHALL BE CONTINUOUS U.L.O.. 所有焊缝必须是连续的, 必须焊满。
8. ALL WELDS OF 5mm FILL FILL WELD SHALL BE PROVIDED BY WELDED CONNECTIONS. 所有5mm填充焊缝必须由焊接连接提供。
9. TENSILE WELD SHALL BE RED COATED TO DISOUBOUR FROM THE PERMANENT BOLT. 拉伸焊缝必须涂红漆, 以使其与永久螺栓区分。

1	A-B/1-2/QNHD +19.000
QTY	MEMBERS LOCATION