RAISECOM

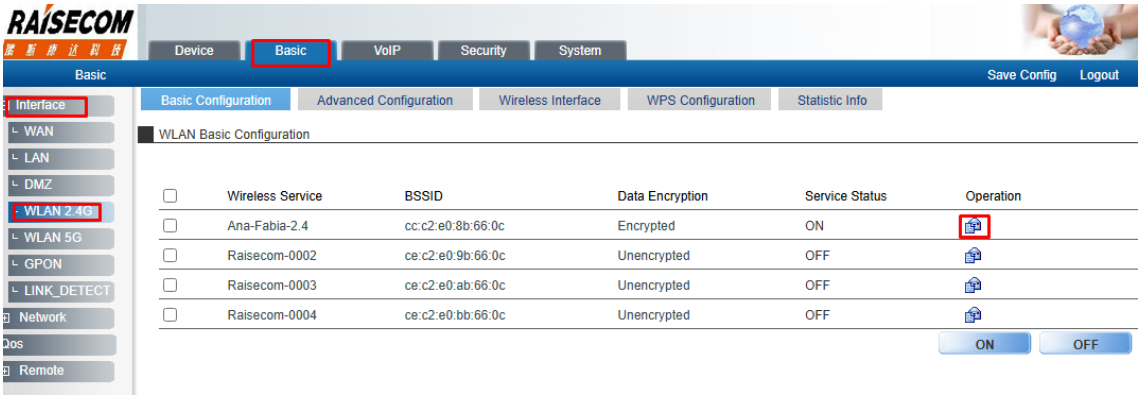
RAISECOM
Device
Basic
VoIP
Security
System
Basic
Save Config
Logout
Interface
WAN
LAN
DMZ
WLAN 2.4G
WLAN 5G
GPON
LINK_DETECT
Network
Qos
Remote
Basic Configuration
Advanced Configuration
Wireless Interface
WPS Configuration
Statistic Info
WLAN Basic Configuration
Wireless Service
BSSID
Data Encryption
Service Status
Operation
Ana-Fabia-2.4
cc:c2:e0:8b:66:0c
Encrypted
ON
Raisecom-0002
ce:c2:e0:9b:66:0c
Unencrypted
OFF
Raisecom-0003
ce:c2:e0:ab:66:0c
Unencrypted
OFF
Raisecom-0004
ce:c2:e0:bb:66:0c
Unencrypted
OFF
ON
OFF

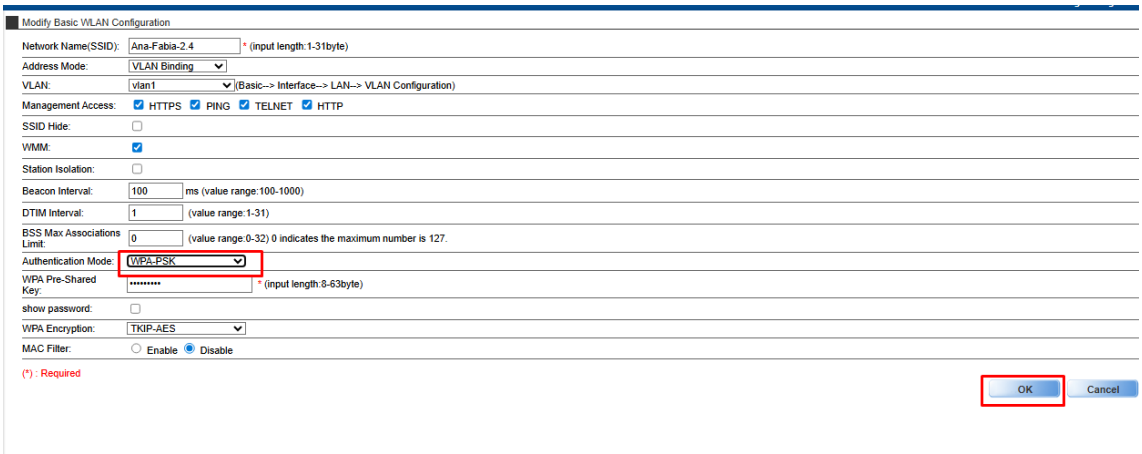
Modify Basic WLAN Configuration
Network Name(SSID): Ana-Fabia-2.4 * (input length:1-31byte)
Address Mode: VLAN Binding
VLAN: vlan1 (Basic--> Interface--> LAN--> VLAN Configuration)
Management Access: HTTPS PING TELNET HTTP
SSID Hide:
WMM:
Station Isolation:
Beacon Interval: 100 ms (value range:100-1000)
DTIM Interval: 1 (value range:1-31)
BSS Max Associations Limit: 0 (value range:0-32) 0 indicates the maximum number is 127.
Authentication Mode: WPA-PSK
WPA Pre-Shared Key: ********* * (input length:8-63byte)
show password:
WPA Encryption: TKIP-AES
MAC Filter: Enable Disable
(*) : Required
OK
Cancel

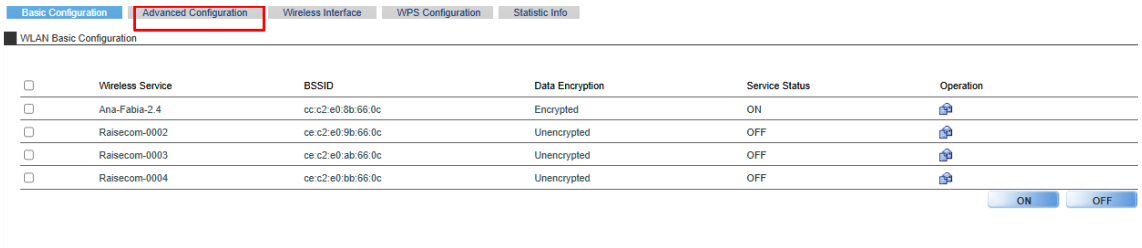
Basic Configuration
Advanced Configuration
Wireless Interface
WPS Configuration
Statistic Info
WLAN Basic Configuration
Wireless Service
BSSID
Data Encryption
Service Status
Operation
Ana-Fabia-2.4
cc:c2:e0:8b:66:0c
Encrypted
ON
Raisecom-0002
ce:c2:e0:9b:66:0c
Unencrypted
OFF
Raisecom-0003
ce:c2:e0:ab:66:0c
Unencrypted
OFF
Raisecom-0004
ce:c2:e0:bb:66:0c
Unencrypted
OFF
ON
OFF

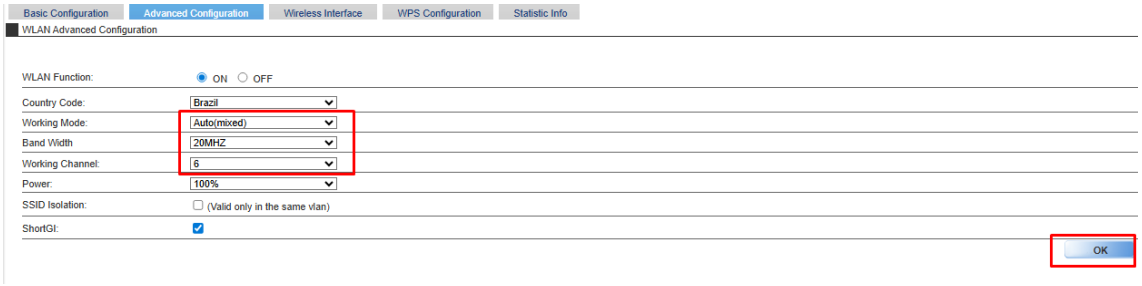
Basic Configuration
Advanced Configuration
Wireless Interface
WPS Configuration
Statistic Info
WLAN Advanced Configuration
WLAN Function: ON OFF
Country Code: Brazil
Working Mode: Auto(mixed)
Band Width 20MHZ
Working Channel: 6
Power: 100%
SSID Isolation: (Valid only in the same vlan)
ShortGI:
OK

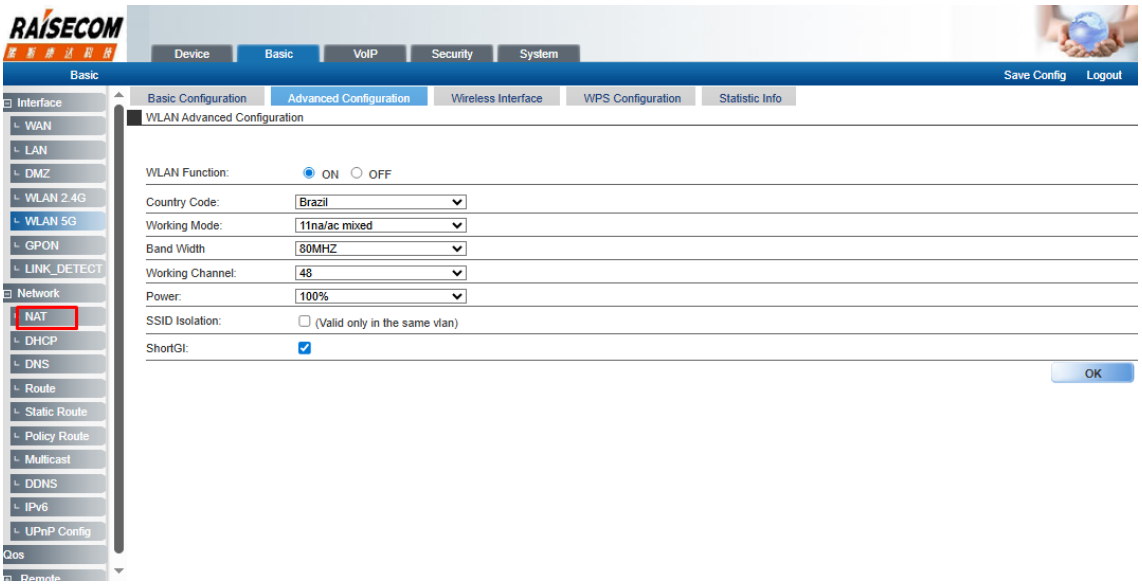
RAISECOM
Device
Basic
VoIP
Security
System
Basic
Save Config
Logout
Interface
WAN
LAN
DMZ
WLAN 2.4G
WLAN 5G
GPON
LINK_DETECT
Network
NAT
DHCP
DNS
Route
Static Route
Policy Route
Multicast
DDNS
IPv6
UPnP Config
Qos
Basic Configuration
Advanced Configuration
Wireless Interface
WPS Configuration
Statistic Info
WLAN Advanced Configuration
WLAN Function:
ON
OFF
Country Code:
Brazil
Working Mode:
11na/ac mixed
Band Width
80MHZ
Working Channel:
48
Power:
100%
SSID Isolation:
(Valid only in the same vlan)
ShortGI:
OK

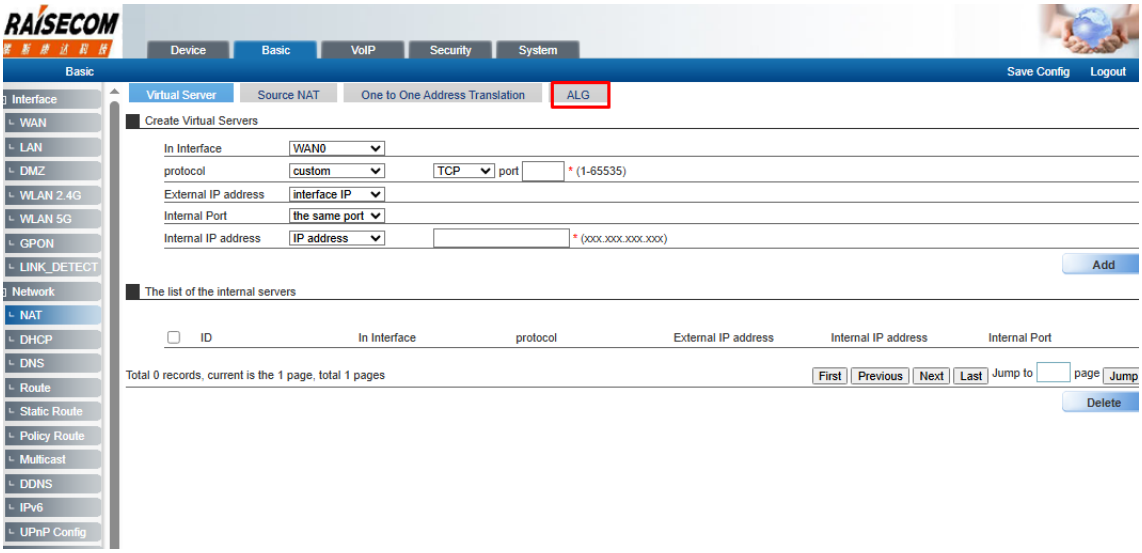
RAISECOM
Device
Basic
VoIP
Security
System
Basic
Save Config
Logout
Interface
WAN
LAN
DMZ
WLAN 2.4G
WLAN 5G
GPON
LINK_DETECT
Network
NAT
DHCP
DNS
Route
Static Route
Policy Route
Multicast
DDNS
IPv6
UPnP Config
Virtual Server
Source NAT
One to One Address Translation
ALG
Create Virtual Servers
In Interface
WAN0
protocol
custom
TCP
port
* (1-65535)
External IP address
interface IP
Internal Port
the same port
Internal IP address
IP address
* (xxx.xxx.xxx.xxx)
Add
The list of the internal servers
ID
In Interface
protocol
External IP address
Internal IP address
Internal Port
Total 0 records, current is the 1 page, total 1 pages
First
Previous
Next
Last
Jump to
page
Jump
Delete

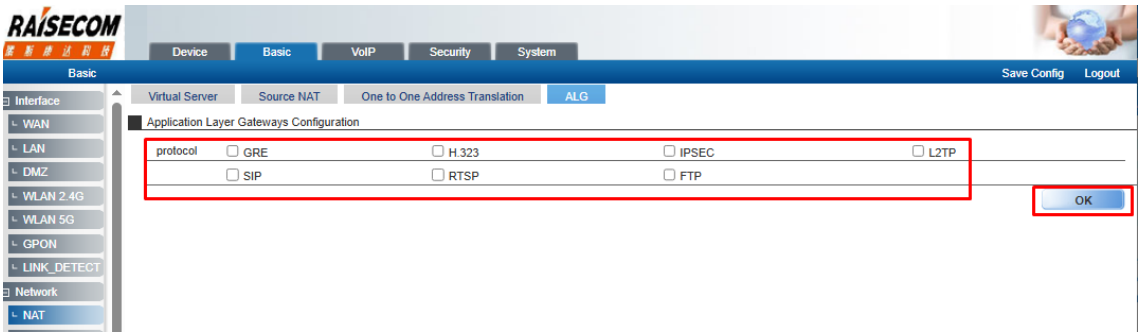
RAISECOM
Device
Basic
VoIP
Security
System
Basic
Save Config
Logout
Interface
WAN
LAN
DMZ
WLAN 2.4G
WLAN 5G
GPON
LINK_DETECT
Network
NAT
Virtual Server
Source NAT
One to One Address Translation
ALG
Application Layer Gateways Configuration
protocol
GRE
H.323
IPSEC
L2TP
SIP
RTSP
FTP
OK

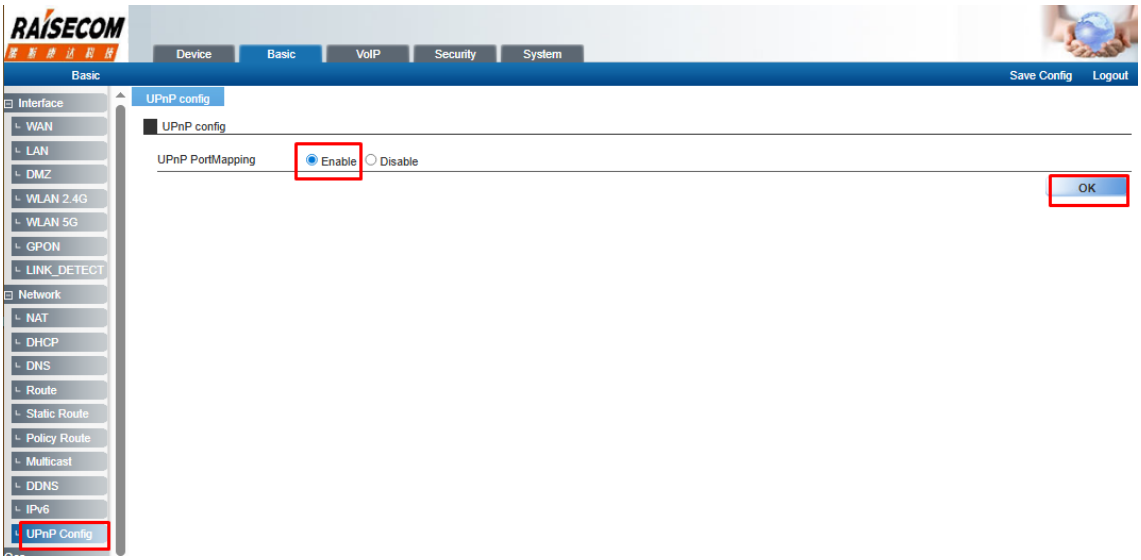
RAISECOM
Device
Basic
VoIP
Security
System
Basic
Save Config
Logout
Interface
WAN
LAN
DMZ
WLAN 2.4G
WLAN 5G
GPON
LINK_DETECT
Network
NAT
DHCP
DNS
Route
Static Route
Policy Route
Multicast
DDNS
IPv6
UPnP Config
UPnP config
UPnP config
UPnP PortMapping
Enable
Disable
OK

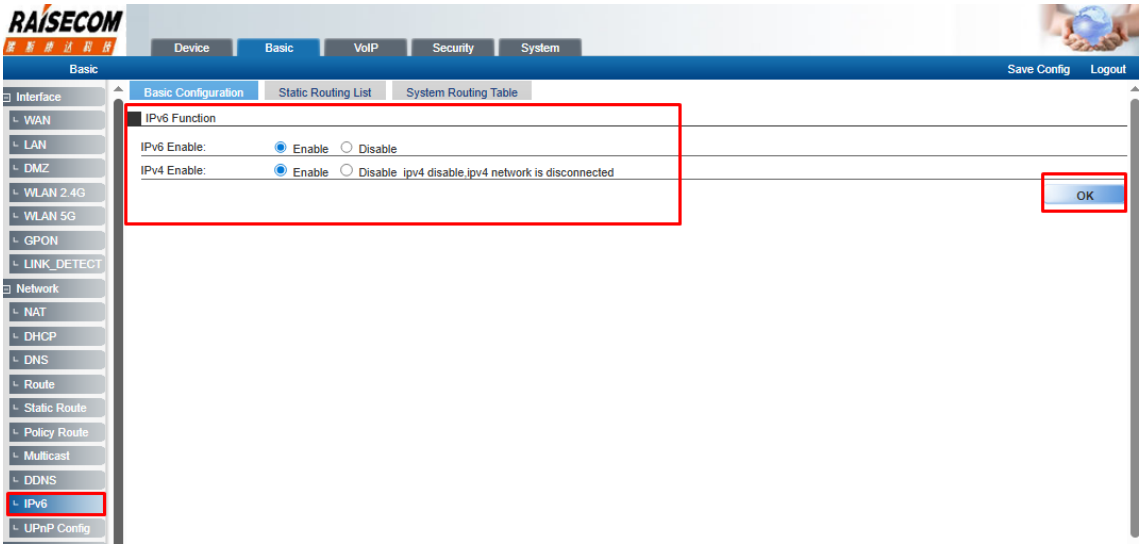
RAISECOM
Device
Basic
VoIP
Security
System
Basic
Save Config
Logout
Interface
WAN
LAN
DMZ
WLAN 2.4G
WLAN 5G
GPON
LINK_DETECT
Network
NAT
DHCP
DNS
Route
Static Route
Policy Route
Multicast
DDNS
IPv6
UPnP Config
Basic Configuration
Static Routing List
System Routing Table
IPv6 Function
IPv6 Enable:
Enable
Disable
IPv4 Enable:
Enable
Disable
ipv4 disable,ipv4 network is disconnected
OK

TENDA

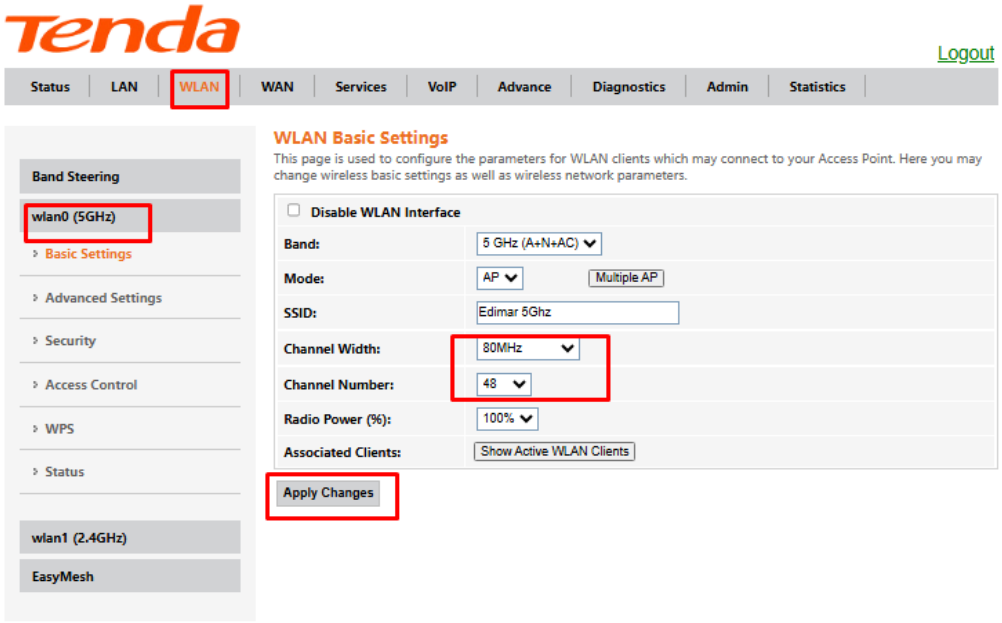
Tenda
Logout
Status
LAN
WLAN
WAN
Services
VoIP
Advance
Diagnostics
Admin
Statistics
Band Steering
wlan0 (5GHz)
Basic Settings
Advanced Settings
Security
Access Control
WPS
Status
wlan1 (2.4GHz)
EasyMesh
WLAN Basic Settings
This page is used to configure the parameters for WLAN clients which may connect to your Access Point. Here you may change wireless basic settings as well as wireless network parameters.
Disable WLAN Interface
Band:
5 GHz (A+N+AC)
Mode:
AP
Multiple AP
SSID:
Edimar 5Ghz
Channel Width:
80MHz
Channel Number:
48
Radio Power (%):
100%
Associated Clients:
Show Active WLAN Clients
Apply Changes

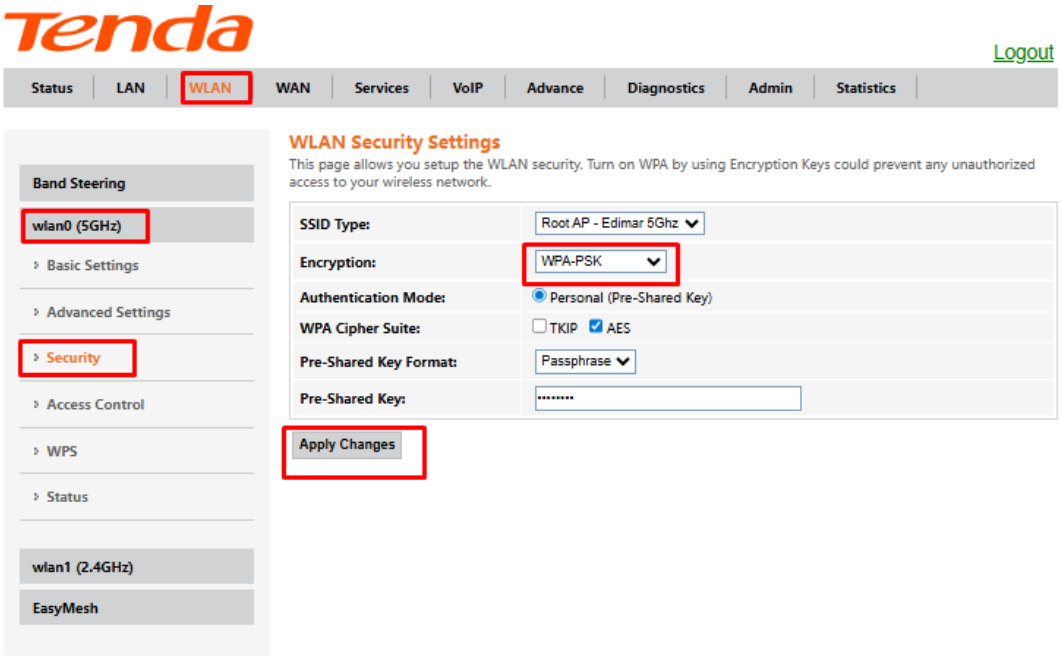
Tenda
Logout
Status
LAN
WLAN
WAN
Services
VoIP
Advance
Diagnostics
Admin
Statistics
Band Steering
wlan0 (5GHz)
Basic Settings
Advanced Settings
Security
Access Control
WPS
Status
wlan1 (2.4GHz)
EasyMesh
WLAN Security Settings
This page allows you setup the WLAN security. Turn on WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.
SSID Type:
Root AP - Edimar 5Ghz
Encryption:
WPA-PSK
Authentication Mode:
Personal (Pre-Shared Key)
WPA Cipher Suite:
TKIP
AES
Pre-Shared Key Format:
Passphrase
Pre-Shared Key:
Apply Changes

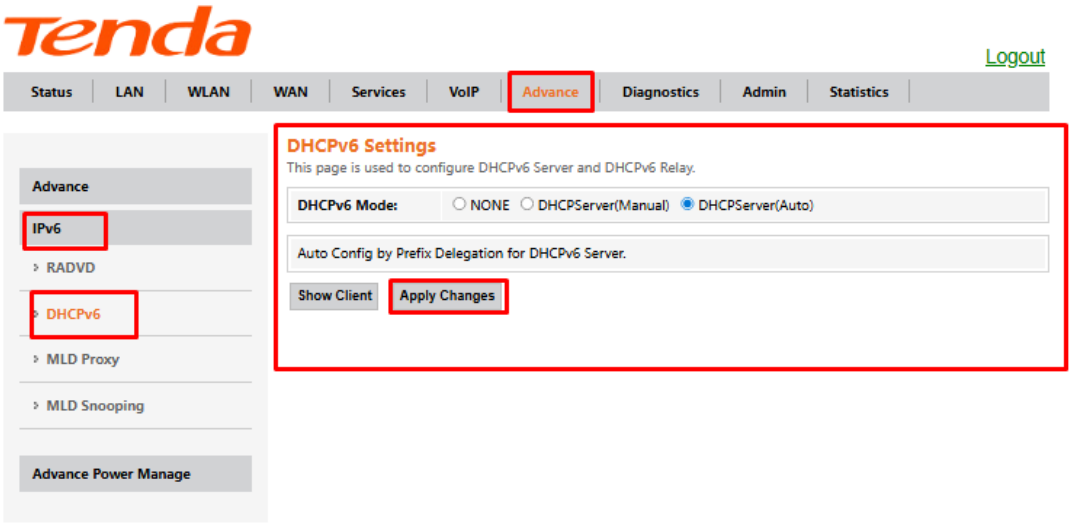
Tenda
Logout
Status
LAN
WLAN
WAN
Services
VoIP
Advance
Diagnostics
Admin
Statistics
Advance
IPv6
RADVD
DHCPv6
MLD Proxy
MLD Snooping
Advance Power Manage
DHCPv6 Settings
This page is used to configure DHCPv6 Server and DHCPv6 Relay.
DHCPv6 Mode:
NONE
DHCPServer(Manual)
DHCPServer(Auto)
Auto Config by Prefix Delegation for DHCPv6 Server.
Show Client
Apply Changes

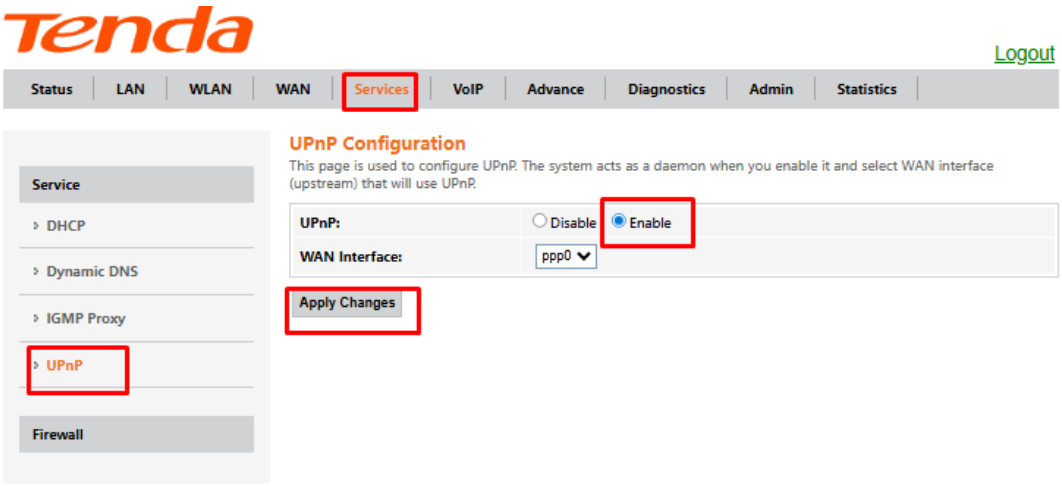
Tenda
Logout
Status
LAN
WLAN
WAN
Services
VoIP
Advance
Diagnostics
Admin
Statistics
Service
DHCP
Dynamic DNS
IGMP Proxy
UPnP
Firewall
UPnP Configuration
This page is used to configure UPnP. The system acts as a daemon when you enable it and select WAN interface (upstream) that will use UPnP.
UPnP:
Disable
Enable
WAN Interface:
ppp0
Apply Changes

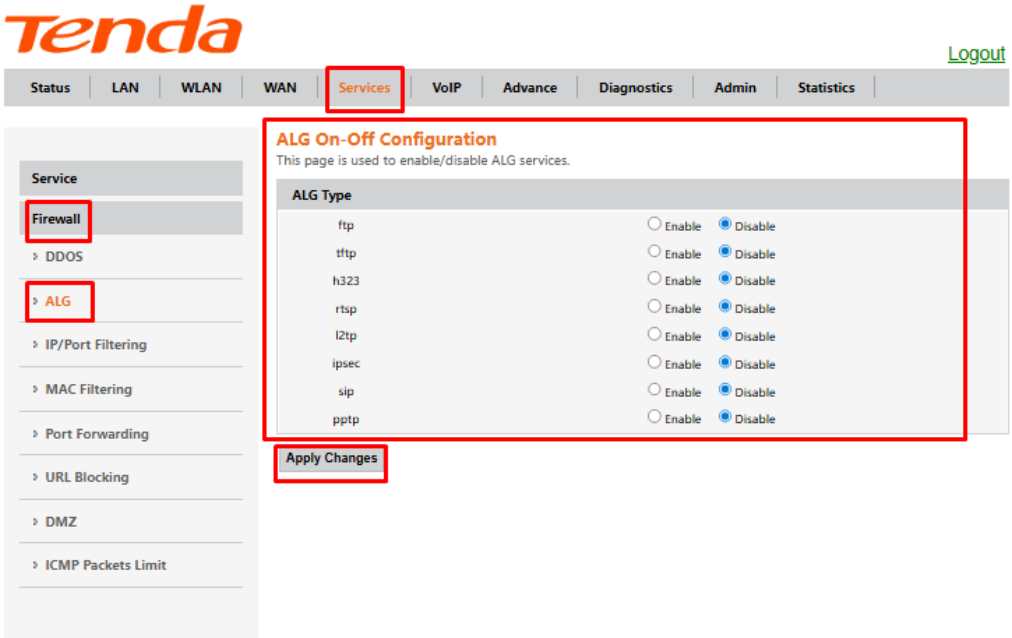
Tenda
Logout
Status
LAN
WLAN
WAN
Services
VoIP
Advance
Diagnostics
Admin
Statistics
Service
Firewall
DDOS
ALG
IP/Port Filtering
MAC Filtering
Port Forwarding
URL Blocking
DMZ
ICMP Packets Limit
ALG On-Off Configuration
This page is used to enable/disable ALG services.
ALG Type
ftp
tftp
h323
rtsp
l2tp
ipsec
sip
pptp
Enable
Disable
Apply Changes

HUAWEI

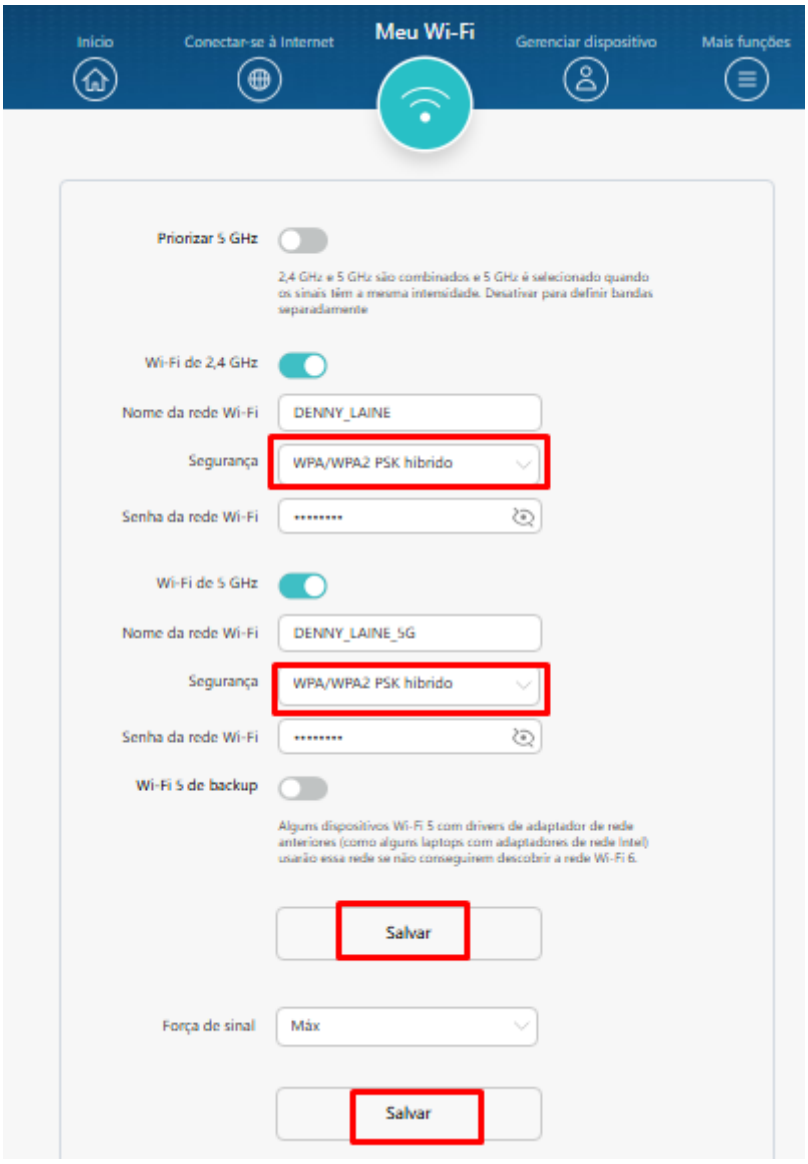
Início
Conectar-se à Internet
Meu Wi-Fi
Gerenciar dispositivo
Mais funções
Priorizar 5 GHz
2,4 GHz e 5 GHz são combinados e 5 GHz é selecionado quando os sinais têm a mesma intensidade. Desativar para definir bandas separadamente
Wi-Fi de 2,4 GHz
Nome da rede Wi-Fi
DENNY_LAINE
Segurança
WPA/WPA2 PSK híbrido
Senha da rede Wi-Fi
Wi-Fi de 5 GHz
Nome da rede Wi-Fi
DENNY_LAINE_5G
Segurança
WPA/WPA2 PSK híbrido
Senha da rede Wi-Fi
Wi-Fi 5 de backup
Alguns dispositivos Wi-Fi 5 com drivers de adaptador de rede anteriores (como alguns laptops com adaptadores de rede Intel) usarão essa rede se não conseguirem descobrir a rede Wi-Fi 6.
Salvar
Força de sinal
Máx
Salvar

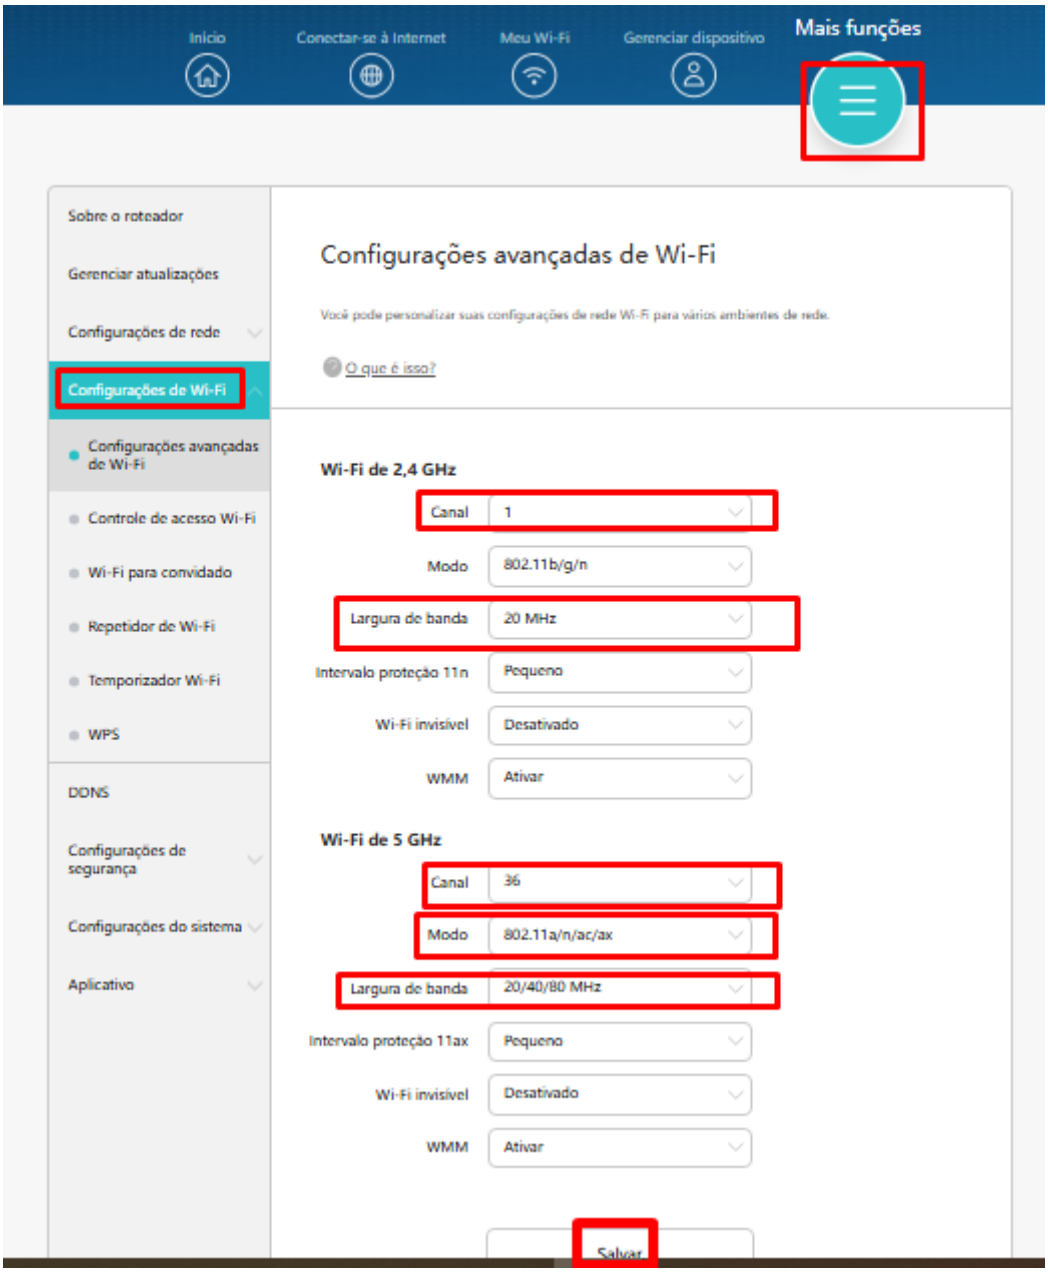
Início
Conectar-se à Internet
Meu Wi-Fi
Gerenciar dispositivo
Mais funções
Sobre o roteador
Gerenciar atualizações
Configurações de rede
Configurações de Wi-Fi
Configurações avançadas de Wi-Fi
Controle de acesso Wi-Fi
Wi-Fi para convidado
Repetidor de Wi-Fi
Temporizador Wi-Fi
WPS
DDNS
Configurações de segurança
Configurações do sistema
Aplicativo
Configurações avançadas de Wi-Fi
Você pode personalizar suas configurações de rede Wi-Fi para vários ambientes de rede.
O que é isso?
Wi-Fi de 2,4 GHz
Canal 1
Modo 802.11b/g/n
Largura de banda 20 MHz
Intervalo proteção 11n Pequeno
Wi-Fi invisível Desativado
WMM Ativar
Wi-Fi de 5 GHz
Canal 36
Modo 802.11a/n/ac/ax
Largura de banda 20/40/80 MHz
Intervalo proteção 11ax Pequeno
Wi-Fi invisível Desativado
WMM Ativar
Salvar

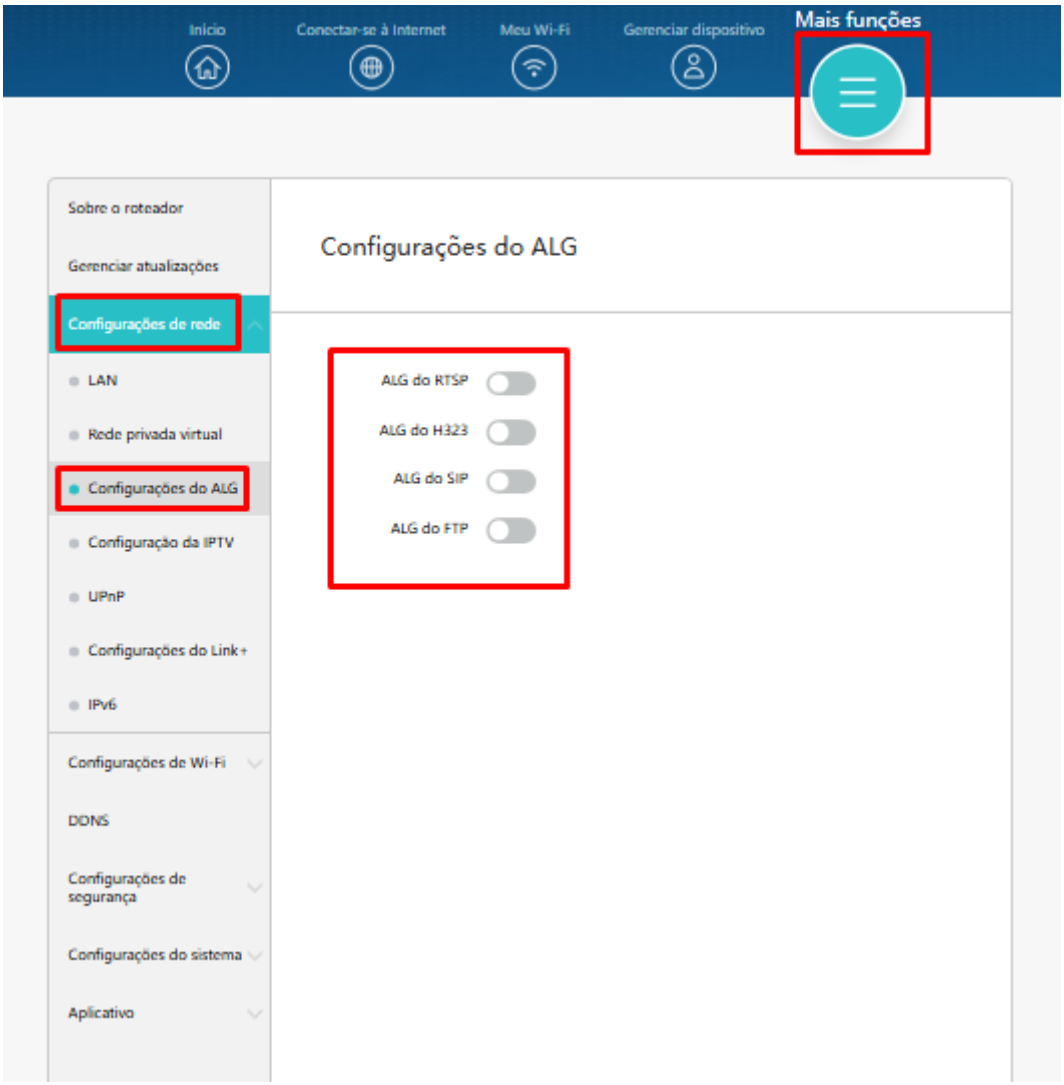
Início
Conectar-se à Internet
Meu Wi-Fi
Gerenciar dispositivo
Mais funções
Sobre o roteador
Gerenciar atualizações
Configurações de rede
LAN
Rede privada virtual
Configurações do ALG
Configuração da IPTV
UPnP
Configurações do Link+
IPv6
Configurações de Wi-Fi
DDNS
Configurações de segurança
Configurações do sistema
Aplicativo
Configurações do ALG
ALG do RTSP
ALG do H323
ALG do SIP
ALG do FTP

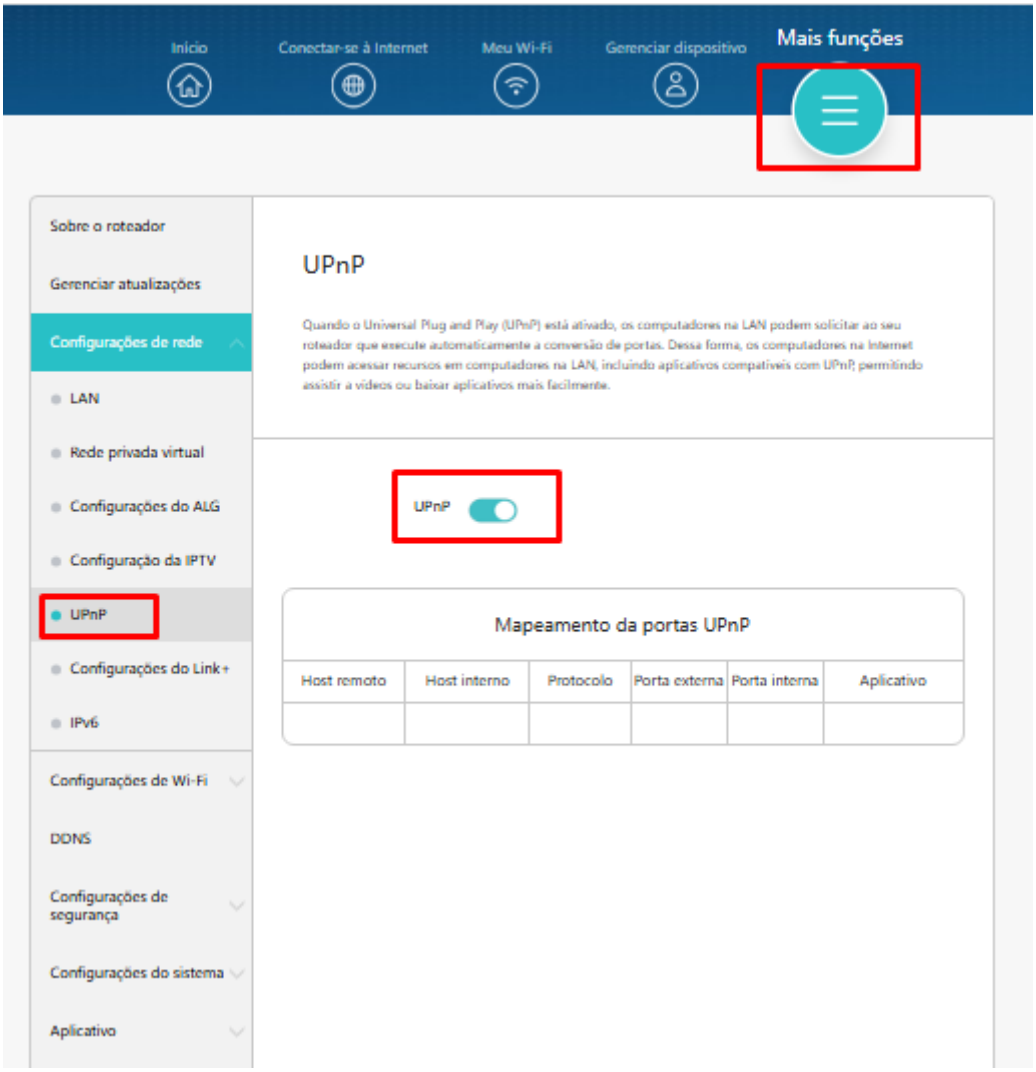
Início
Conectar-se à Internet
Meu Wi-Fi
Gerenciar dispositivo
Mais funções
Sobre o roteador
Gerenciar atualizações
Configurações de rede
LAN
Rede privada virtual
Configurações do ALG
Configuração da IPTV
UPnP
Configurações do Link+
IPv6
Configurações de Wi-Fi
DDNS
Configurações de segurança
Configurações do sistema
Aplicativo
UPnP
Quando o Universal Plug and Play (UPnP) está ativado, os computadores na LAN podem solicitar ao seu roteador que execute automaticamente a conversão de portas. Dessa forma, os computadores na Internet podem acessar recursos em computadores na LAN, incluindo aplicativos compatíveis com UPnP, permitindo assistir a vídeos ou baixar aplicativos mais facilmente.
UPnP
Mapeamento da portas UPnP
Host remoto
Host interno
Protocolo
Porta externa
Porta interna
Aplicativo

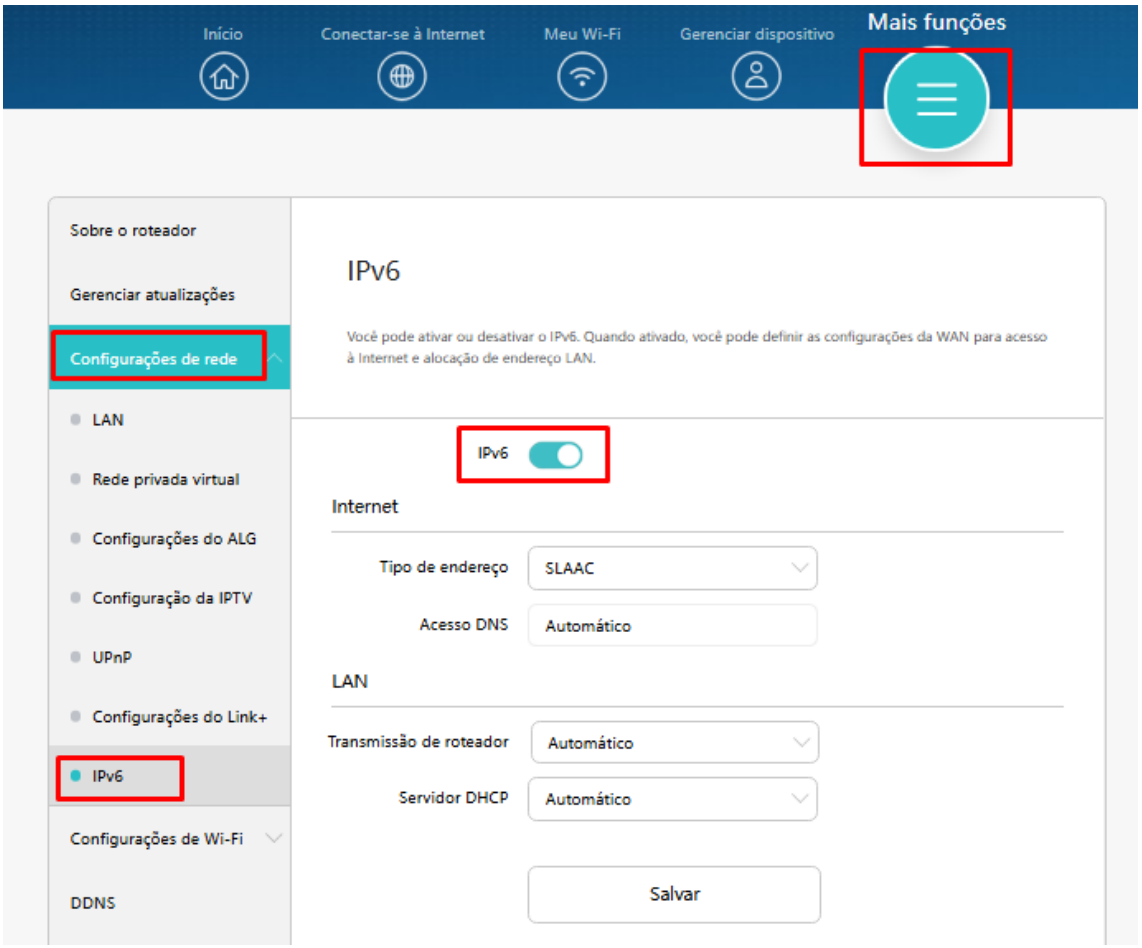
Início
Conectar-se à Internet
Meu Wi-Fi
Gerenciar dispositivo
Mais funções
Sobre o roteador
Gerenciar atualizações
Configurações de rede
LAN
Rede privada virtual
Configurações do ALG
Configuração da IPTV
UPnP
Configurações do Link+
IPv6
Configurações de Wi-Fi
DDNS
IPv6
Você pode ativar ou desativar o IPv6. Quando ativado, você pode definir as configurações da WAN para acesso à Internet e alocação de endereço LAN.
IPv6
Internet
Tipo de endereço
SLAAC
Acesso DNS
Automático
LAN
Transmissão de roteador
Automático
Servidor DHCP
Automático
Salvar

V- SOL

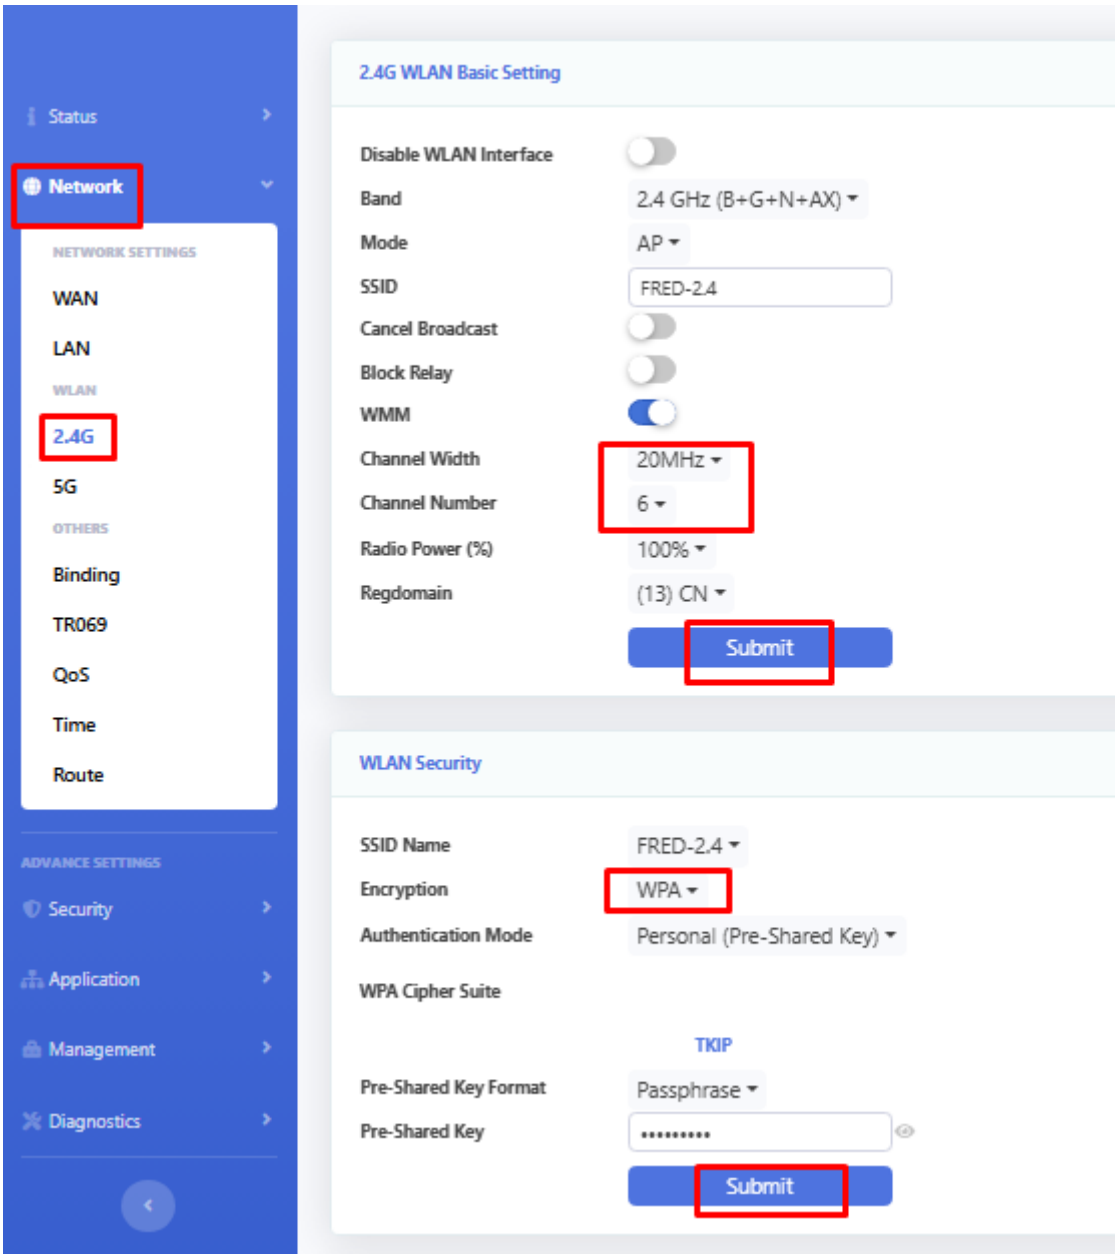
Status
Network
NETWORK SETTINGS
WAN
LAN
WLAN
2.4G
5G
OTHERS
Binding
TR069
QoS
Time
Route
ADVANCE SETTINGS
Security
Application
Management
Diagnostics
2.4G WLAN Basic Setting
Disable WLAN Interface
Band
2.4 GHz (B+G+N+AX)
Mode
AP
SSID
FRED-2.4
Cancel Broadcast
Block Relay
WMM
Channel Width
20MHz
Channel Number
6
Radio Power (%)
100%
Regdomain
(13) CN
Submit
WLAN Security
SSID Name
FRED-2.4
Encryption
WPA
Authentication Mode
Personal (Pre-Shared Key)
WPA Cipher Suite
TKIP
Pre-Shared Key Format
Passphrase
Pre-Shared Key
Submit

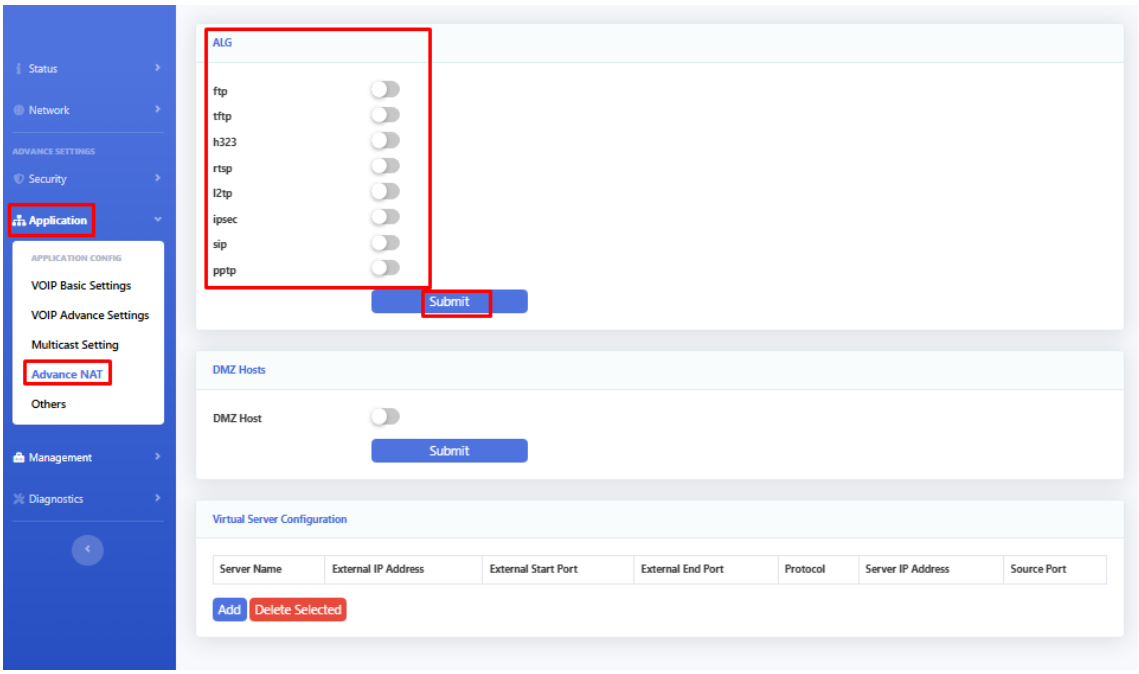
Status
Network
ADVANCE SETTINGS
Security
Application
APPLICATION CONFIG
VOIP Basic Settings
VOIP Advance Settings
Multicast Setting
Advance NAT
Others
Management
Diagnostics
ALG
ftp
tftp
h323
rtsp
l2tp
ipsec
sip
pptp
Submit
DMZ Hosts
DMZ Host
Submit
Virtual Server Configuration
Server Name
External IP Address
External Start Port
External End Port
Protocol
Server IP Address
Source Port
Add
Delete Selected

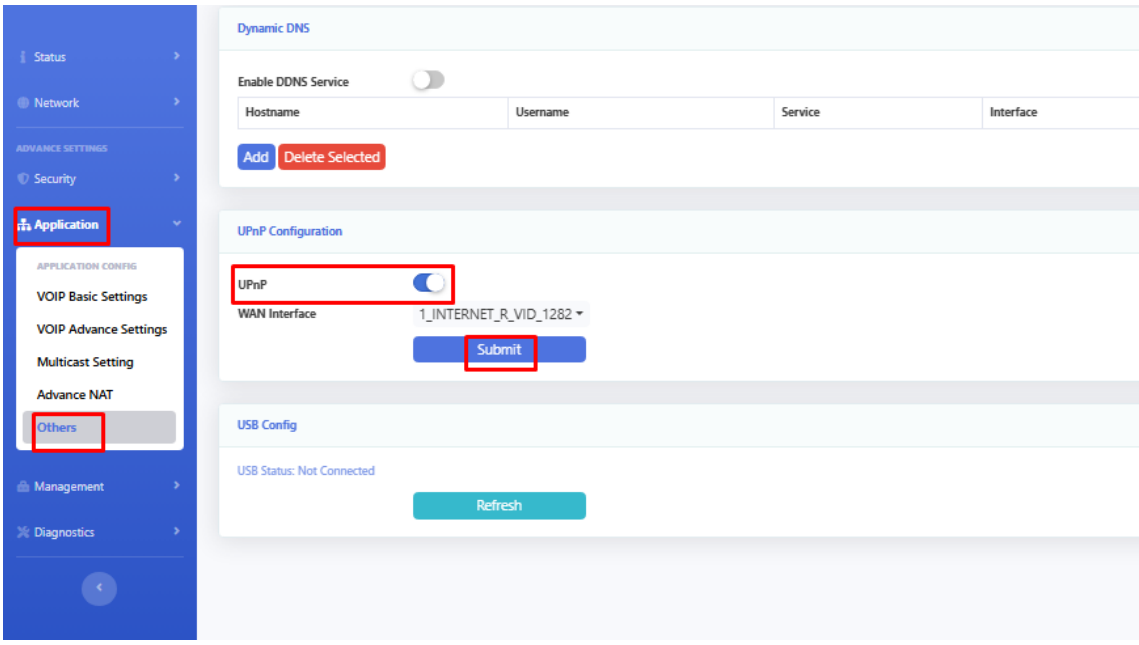
Status
Network
ADVANCE SETTINGS
Security
Application
APPLICATION CONFIG
VOIP Basic Settings
VOIP Advance Settings
Multicast Setting
Advance NAT
Others
Management
Diagnostics
Dynamic DNS
Enable DDNS Service
Hostname
Username
Service
Interface
Add
Delete Selected
UPnP Configuration
UPnP
WAN Interface
1_INTERNET_R_VID_1282
Submit
USB Config
USB Status: Not Connected
Refresh

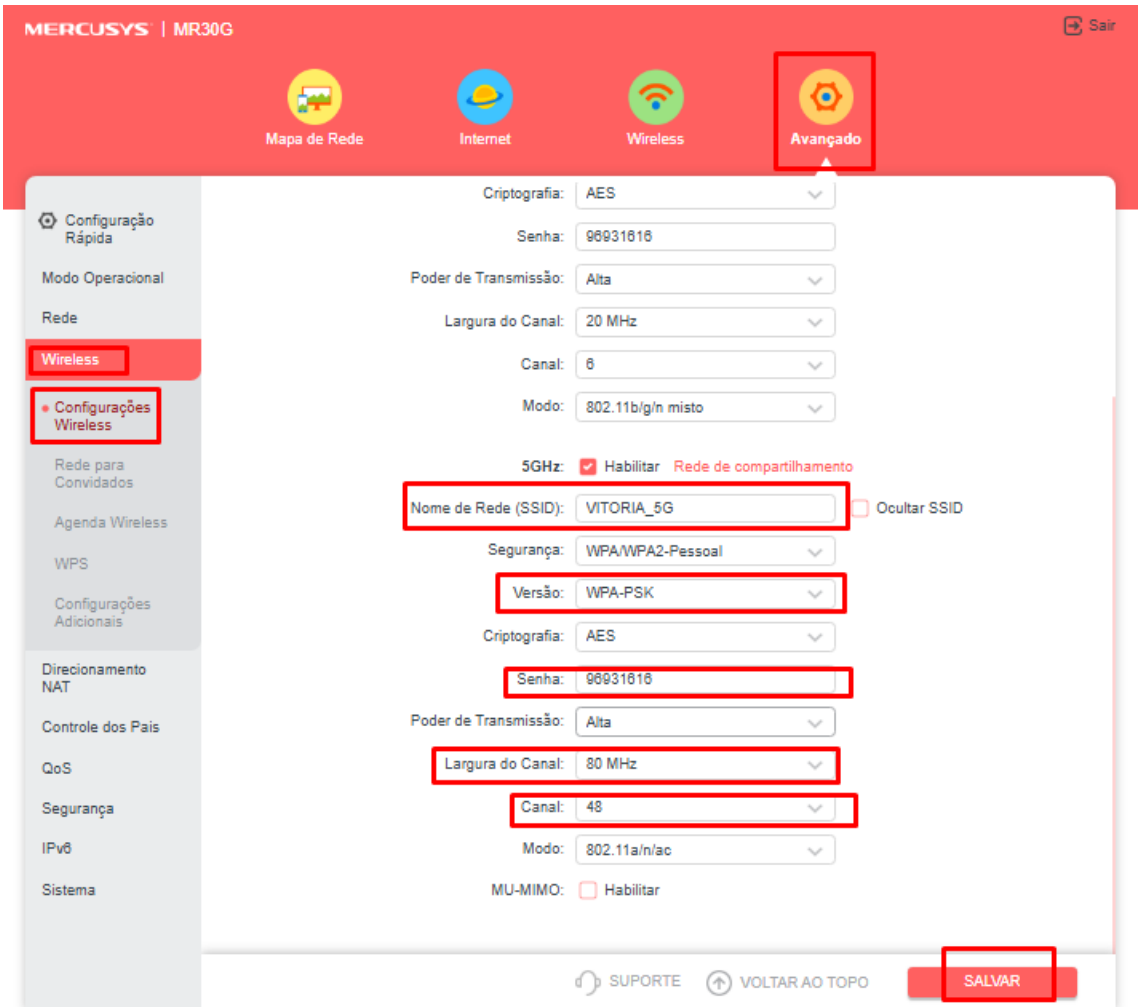
MERCUSYS | MR30G
Sair
Mapa de Rede
Internet
Wireless
Avançado
Configuração Rápida
Modo Operacional
Rede
Wireless
Configurações Wireless
Rede para Convidados
Agenda Wireless
WPS
Configurações Adicionais
Direcionamento NAT
Controle dos Pais
QoS
Segurança
IPv6
Sistema
Criptografia: AES
Senha: 96931616
Poder de Transmissão: Alta
Largura do Canal: 20 MHz
Canal: 6
Modo: 802.11b/g/n misto
5GHz: Habilitar Rede de compartilhamento
Nome de Rede (SSID): VITORIA_5G
Ocultar SSID
Segurança: WPA/WPA2-Pessoal
Versão: WPA-PSK
Criptografia: AES
Senha: 96931616
Poder de Transmissão: Alta
Largura do Canal: 80 MHz
Canal: 48
Modo: 802.11a/n/ac
MU-MIMO: Habilitar
SUPORTE
VOLTAR AO TOPO
SALVAR

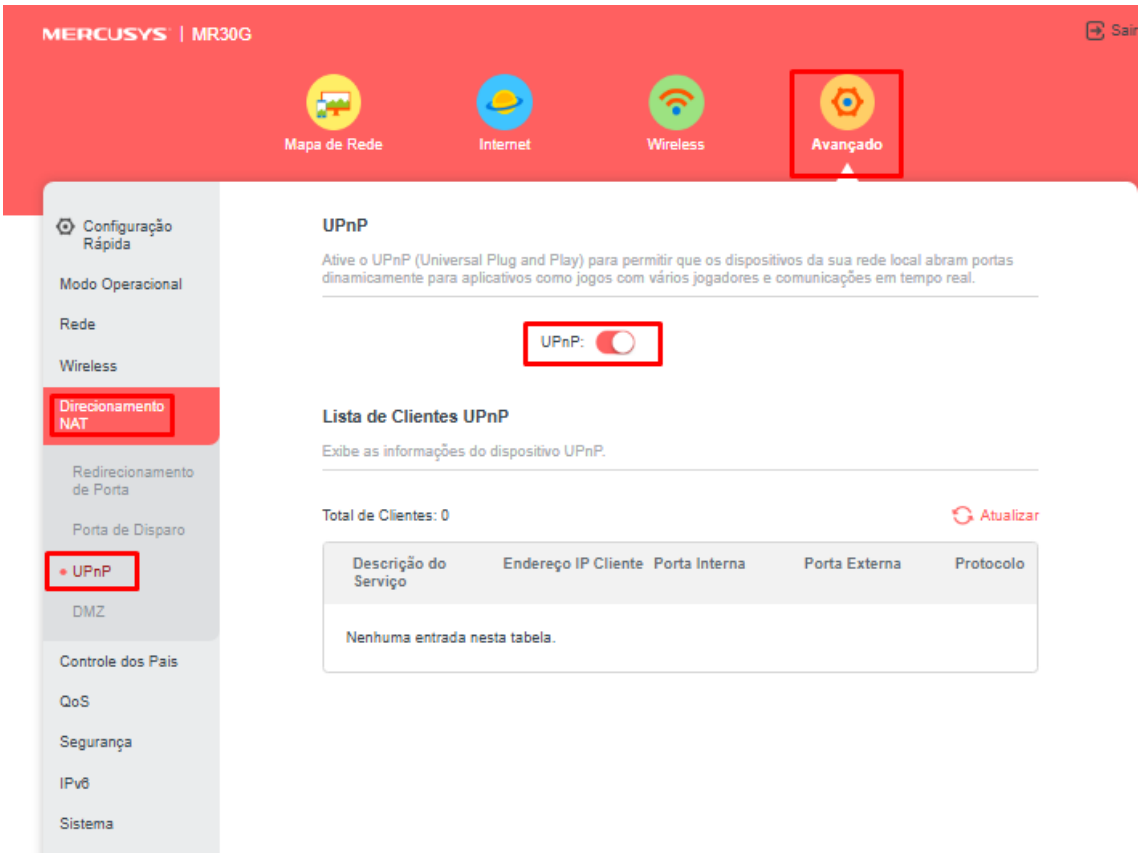
MERCUSYS | MR30G
Sair
Mapa de Rede
Internet
Wireless
Avançado
Configuração Rápida
Modo Operacional
Rede
Wireless
Direcionamento NAT
Redirecionamento de Porta
Porta de Disparo
UPnP
DMZ
Controle dos Pais
QoS
Segurança
IPv6
Sistema
UPnP
Ative o UPnP (Universal Plug and Play) para permitir que os dispositivos da sua rede local abram portas dinamicamente para aplicativos como jogos com vários jogadores e comunicações em tempo real.
UPnP:
Lista de Clientes UPnP
Exibe as informações do dispositivo UPnP.
Total de Clientes: 0
Atualizar
Descrição do Serviço
Endereço IP Cliente
Porta Interna
Porta Externa
Protocolo
Nenhuma entrada nesta tabela.

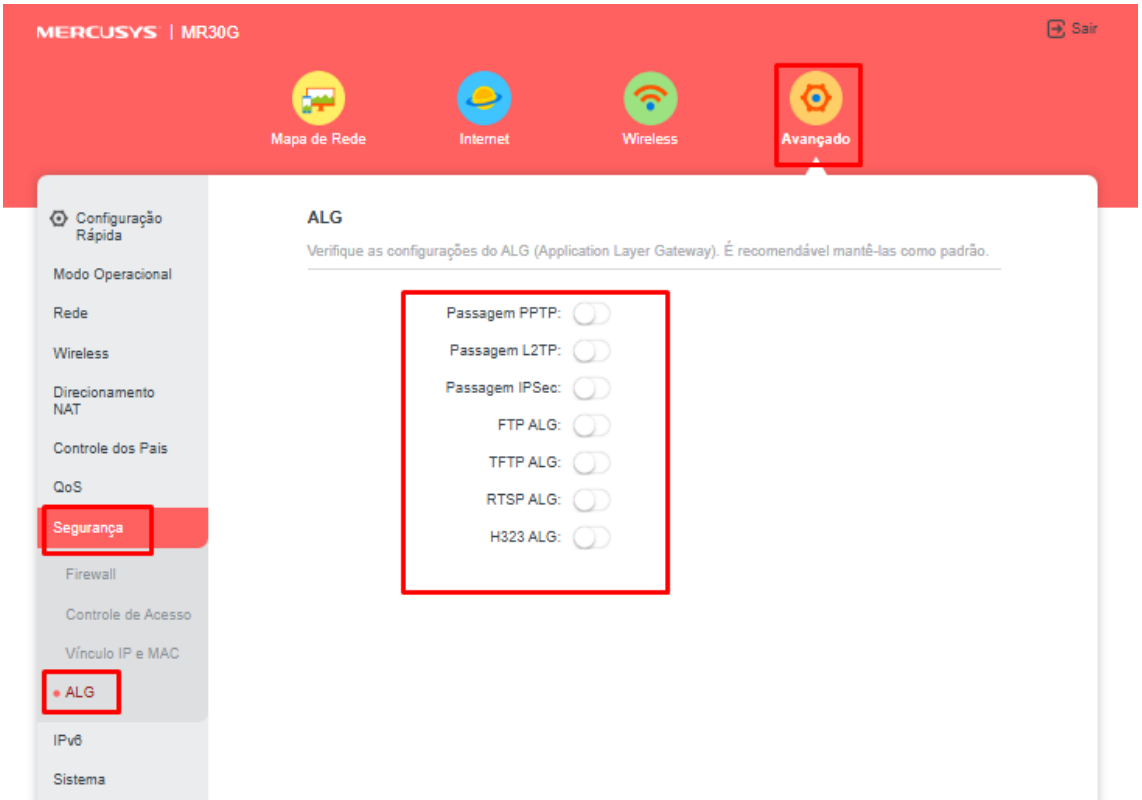
MERCUSYS | MR30G
Sair
Mapa de Rede
Internet
Wireless
Avançado
Configuração Rápida
Modo Operacional
Rede
Wireless
Direcionamento NAT
Controle dos Pais
QoS
Segurança
Firewall
Controle de Acesso
Vínculo IP e MAC
ALG
IPv6
Sistema
ALG
Verifique as configurações do ALG (Application Layer Gateway). É recomendável mantê-las como padrão.
Passagem PPTP:
Passagem L2TP:
Passagem IPSec:
FTP ALG:
TFTP ALG:
RTSP ALG:
H323 ALG:

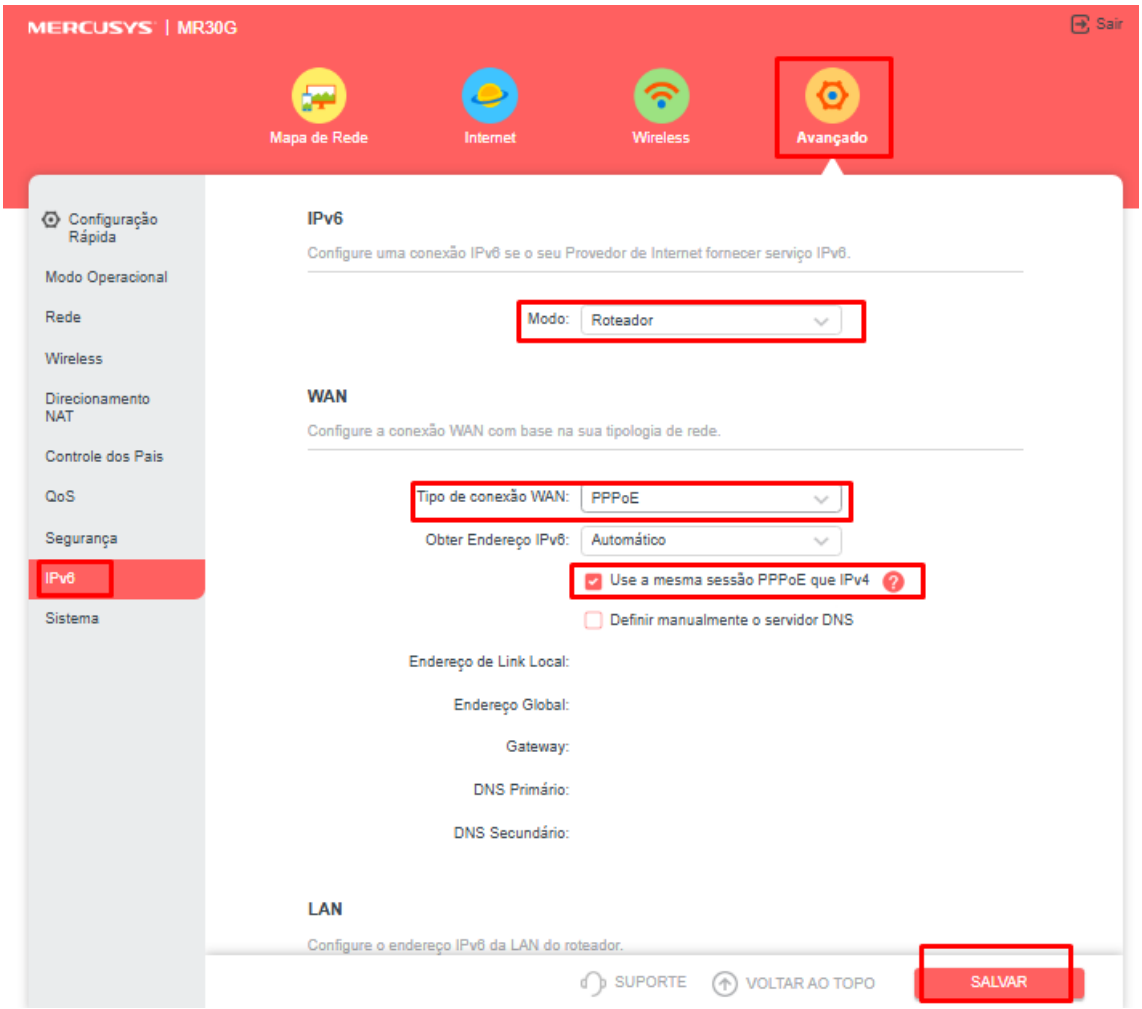
MERCUSYS | MR30G
Sair
Mapa de Rede
Internet
Wireless
Avançado
Configuração Rápida
Modo Operacional
Rede
Wireless
Direcionamento NAT
Controle dos Pais
QoS
Segurança
IPv6
Sistema
IPv6
Configure uma conexão IPv6 se o seu Provedor de Internet fornecer serviço IPv6.
Modo: Roteador
WAN
Configure a conexão WAN com base na sua tipologia de rede.
Tipo de conexão WAN: PPPoE
Obter Endereço IPv6: Automático
Use a mesma sessão PPPoE que IPv4
Definir manualmente o servidor DNS
Endereço de Link Local:
Endereço Global:
Gateway:
DNS Primário:
DNS Secundário:
LAN
Configure o endereço IPv6 da LAN do roteador.
SUPORTE
VOLTAR AO TOPO
SALVAR

TP – LINK

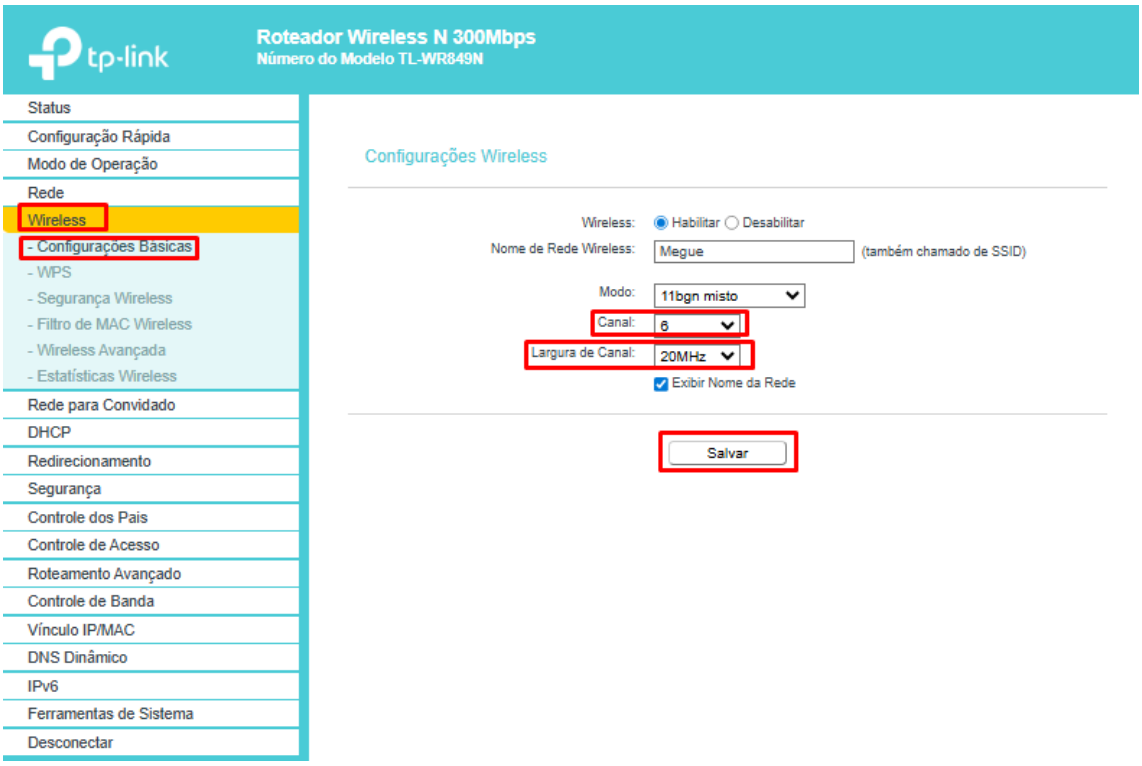
tp-link
Roteador Wireless N 300Mbps
Número do Modelo TL-WR849N
Status
Configuração Rápida
Modo de Operação
Rede
Wireless
- Configurações Básicas
- WPS
- Segurança Wireless
- Filtro de MAC Wireless
- Wireless Avançada
- Estatísticas Wireless
Rede para Convidado
DHCP
Redirecionamento
Segurança
Controle dos Pais
Controle de Acesso
Roteamento Avançado
Controle de Banda
Vínculo IP/MAC
DNS Dinâmico
IPv6
Ferramentas de Sistema
Desconectar
Configurações Wireless
Wireless: Habilitar Desabilitar
Nome de Rede Wireless: Megue (também chamado de SSID)
Modo: 11bgn misto
Canal: 6
Largura de Canal: 20MHz
Exibir Nome da Rede
Salvar

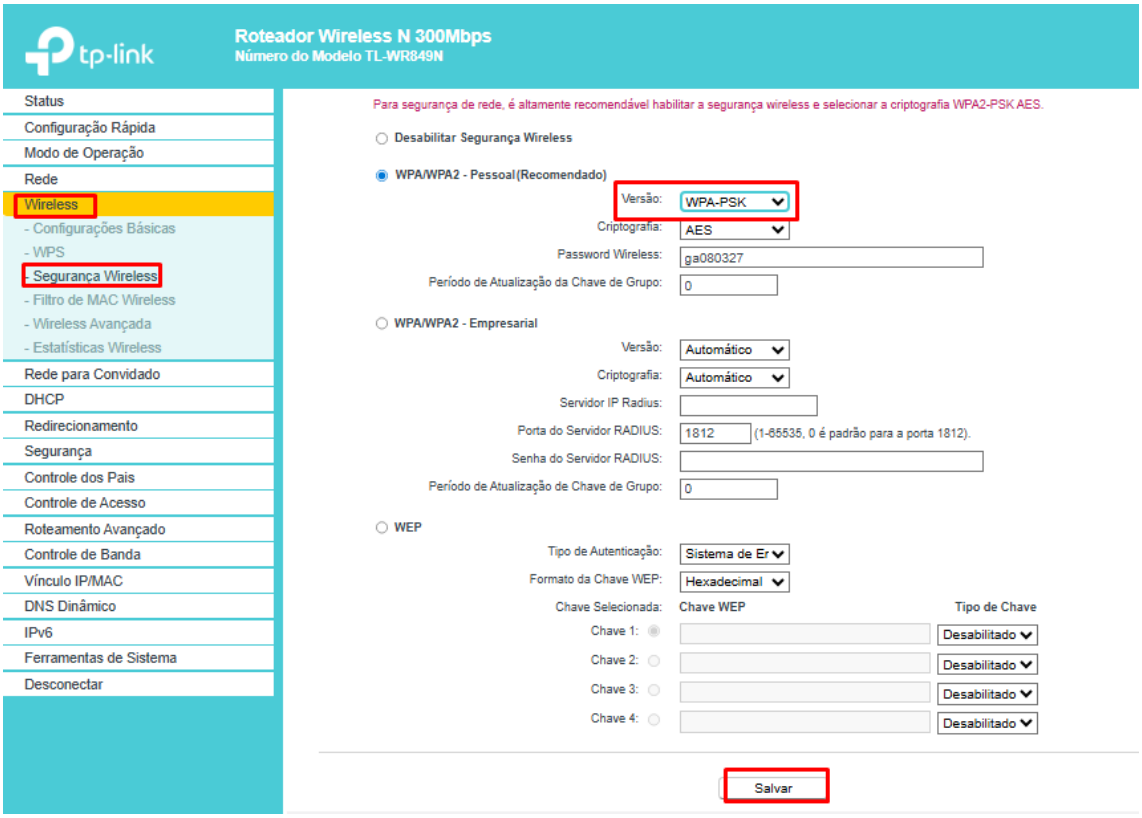
tp-link
Roteador Wireless N 300Mbps
Número do Modelo TL-WR849N
Status
Configuração Rápida
Modo de Operação
Rede
Wireless
- Configurações Básicas
- WPS
- Segurança Wireless
- Filtro de MAC Wireless
- Wireless Avançada
- Estatísticas Wireless
Rede para Convidado
DHCP
Redirecionamento
Segurança
Controle dos Pais
Controle de Acesso
Roteamento Avançado
Controle de Banda
Vínculo IP/MAC
DNS Dinâmico
IPv6
Ferramentas de Sistema
Desconectar
Para segurança de rede, é altamente recomendável habilitar a segurança wireless e selecionar a criptografia WPA2-PSK AES.
Desabilitar Segurança Wireless
WPA/WPA2 - Pessoal(Recomendado)
Versão: WPA-PSK
Criptografia: AES
Password Wireless: ga080327
Período de Atualização da Chave de Grupo: 0
WPA/WPA2 - Empresarial
Versão: Automático
Criptografia: Automático
Servidor IP Radius:
Porta do Servidor RADIUS: 1812 (1-65535, 0 é padrão para a porta 1812).
Senha do Servidor RADIUS:
Período de Atualização de Chave de Grupo: 0
WEP
Tipo de Autenticação: Sistema de Er
Formato da Chave WEP: Hexadecimal
Chave Selecionada: Chave WEP Tipo de Chave
Chave 1: Desabilitado
Chave 2: Desabilitado
Chave 3: Desabilitado
Chave 4: Desabilitado
Salvar

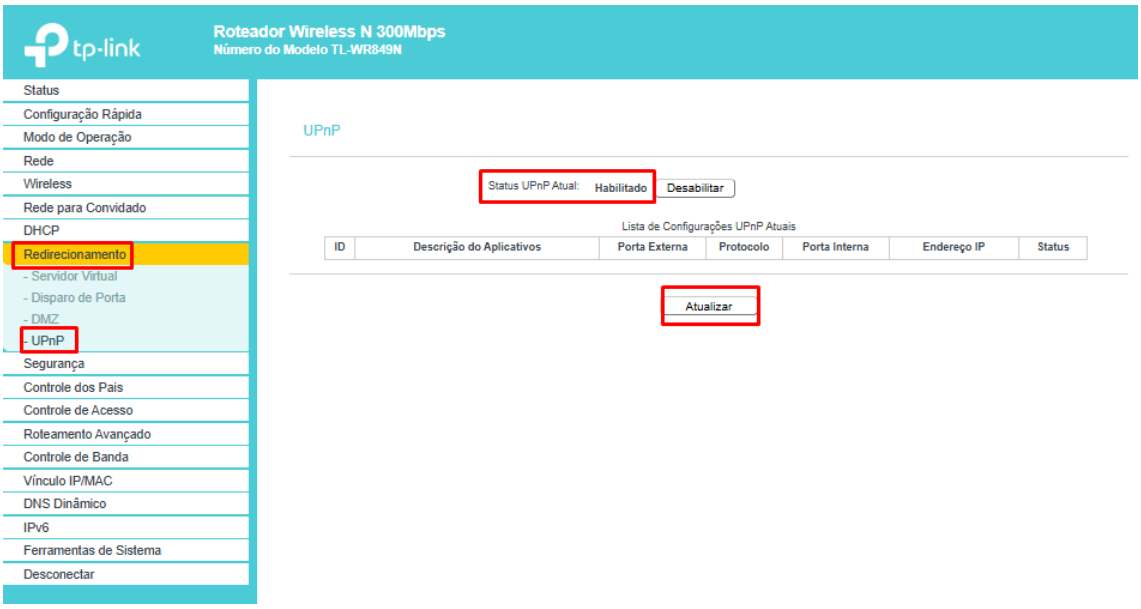
tp-link
Roteador Wireless N 300Mbps
Número do Modelo TL-WR849N
Status
Configuração Rápida
Modo de Operação
Rede
Wireless
Rede para Convidado
DHCP
Redirecionamento
- Servidor Virtual
- Disparo de Porta
- DMZ
- UPnP
Segurança
Controle dos Pais
Controle de Acesso
Roteamento Avançado
Controle de Banda
Vínculo IP/MAC
DNS Dinâmico
IPv6
Ferramentas de Sistema
Desconectar
UPnP
Status UPnP Atual: Habilitado Desabilitar
Lista de Configurações UPnP Atuais
ID
Descrição do Aplicativos
Porta Externa
Protocolo
Porta Interna
Endereço IP
Status
Atualizar

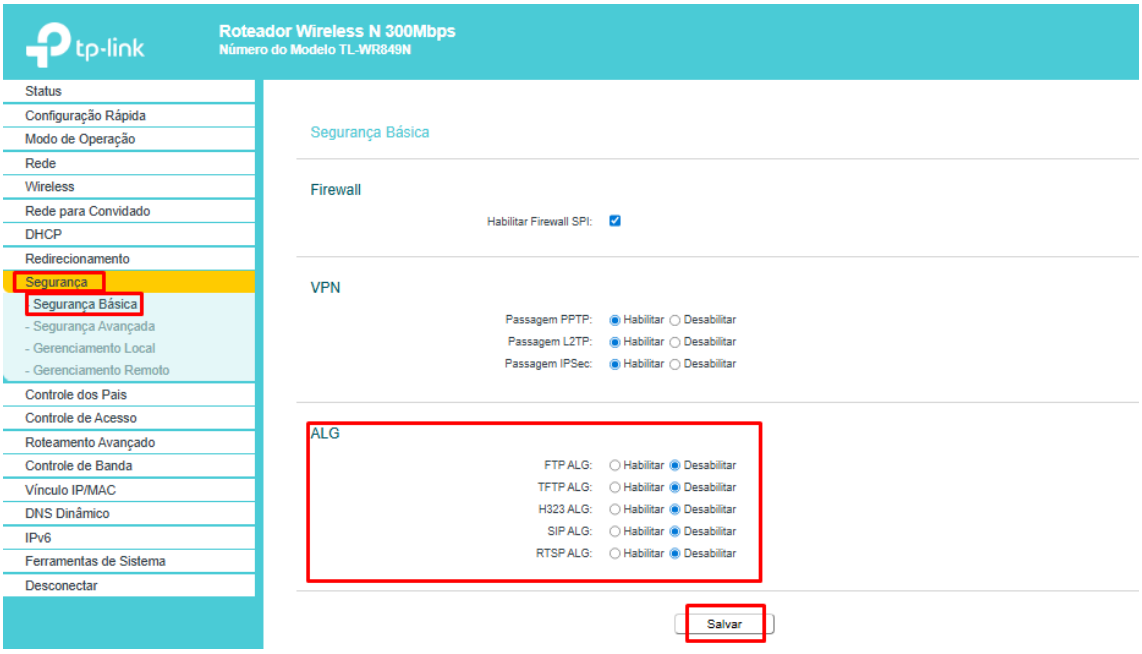
tp-link
Roteador Wireless N 300Mbps
Número do Modelo TL-WR849N
Status
Configuração Rápida
Modo de Operação
Rede
Wireless
Rede para Convidado
DHCP
Redirecionamento
Segurança
Segurança Básica
- Segurança Avançada
- Gerenciamento Local
- Gerenciamento Remoto
Controle dos Pais
Controle de Acesso
Roteamento Avançado
Controle de Banda
Vínculo IP/MAC
DNS Dinâmico
IPv6
Ferramentas de Sistema
Desconectar
Segurança Básica
Firewall
Habilitar Firewall SPI:
VPN
Passagem PPTP: Habilitar Desabilitar
Passagem L2TP: Habilitar Desabilitar
Passagem IPSec: Habilitar Desabilitar
ALG
FTP ALG: Habilitar Desabilitar
TFTP ALG: Habilitar Desabilitar
H323 ALG: Habilitar Desabilitar
SIP ALG: Habilitar Desabilitar
RTSP ALG: Habilitar Desabilitar
Salvar

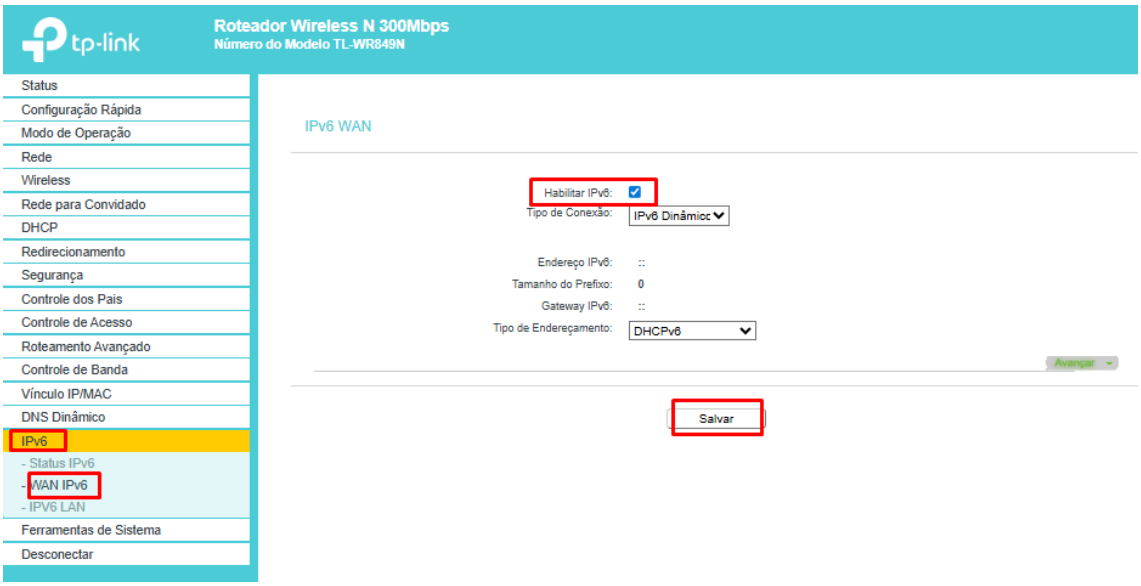
tp-link
Roteador Wireless N 300Mbps
Número do Modelo TL-WR849N
Status
Configuração Rápida
Modo de Operação
Rede
Wireless
Rede para Convidado
DHCP
Redirecionamento
Segurança
Controle dos Pais
Controle de Acesso
Roteamento Avançado
Controle de Banda
Vínculo IP/MAC
DNS Dinâmico
IPv6
- Status IPv6
- WAN IPv6
- IPV6 LAN
Ferramentas de Sistema
Desconectar
IPv6 WAN
Habilitar IPv6:
Tipo de Conexão:
IPv6 Dinâmico
Endereço IPv6:
::
Tamanho do Prefixo:
0
Gateway IPv6:
::
Tipo de Endereçamento:
DHCPv6
Avançar
Salvar

NOKIA

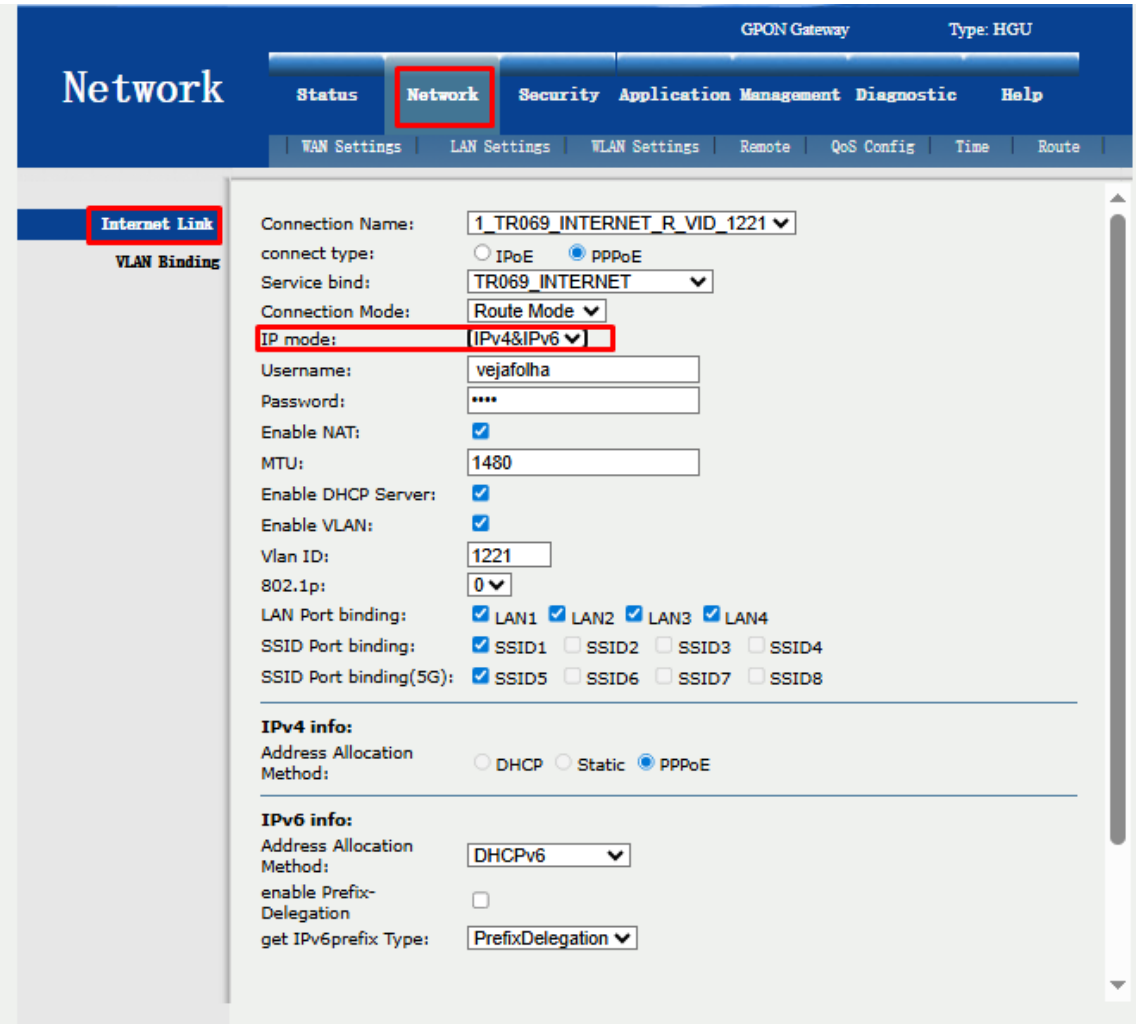
GPON Gateway
Type: HGU
Network
Status
Network
Security
Application
Management
Diagnostic
Help
WAN Settings
LAN Settings
WLAN Settings
Remote
QoS Config
Time
Route
Internet Link
VLAN Binding
Connection Name:
1_TR069_INTERNET_R_VID_1221
connect type:
IPoE
PPPoE
Service bind:
TR069_INTERNET
Connection Mode:
Route Mode
IP mode:
IPv4&IPv6
Username:
vejafolha
Password:
Enable NAT:
MTU:
1480
Enable DHCP Server:
Enable VLAN:
Vlan ID:
1221
802.1p:
0
LAN Port binding:
LAN1
LAN2
LAN3
LAN4
SSID Port binding:
SSID1
SSID2
SSID3
SSID4
SSID Port binding(5G):
SSID5
SSID6
SSID7
SSID8
IPv4 info:
Address Allocation Method:
DHCP
Static
PPPoE
IPv6 info:
Address Allocation Method:
DHCPv6
enable Prefix-Delegation
get IPv6prefix Type:
PrefixDelegation

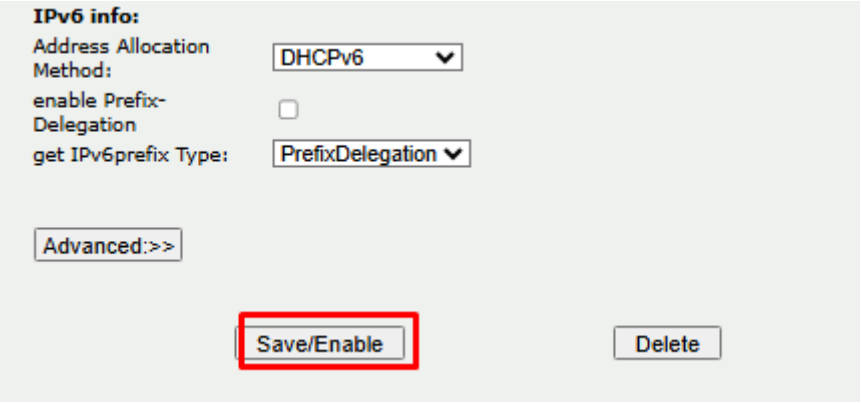
IPv6 info:
Address Allocation Method:
DHCPv6
enable Prefix-Delegation
get IPv6prefix Type:
PrefixDelegation
Advanced:>>
Save/Enable
Delete

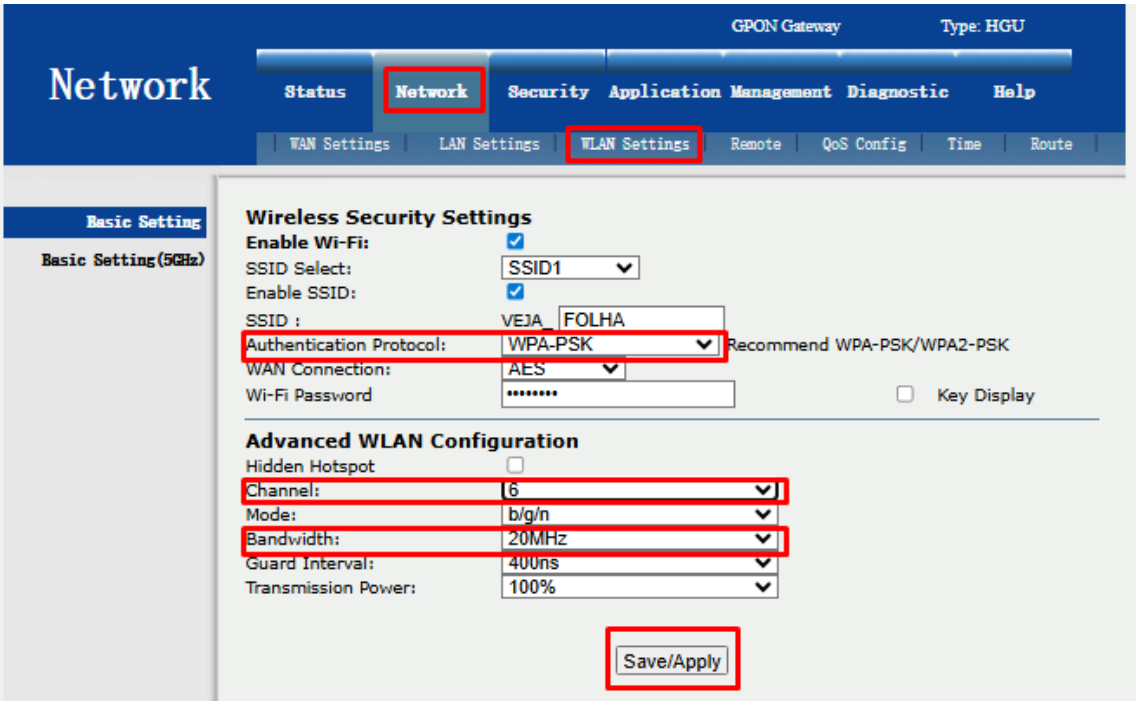
GPON Gateway
Type: HGU
Network
Status
Network
Security
Application
Management
Diagnostic
Help
WAN Settings
LAN Settings
WLAN Settings
Remote
QoS Config
Time
Route
Basic Setting
Basic Setting(5GHz)
Wireless Security Settings
Enable Wi-Fi:
SSID Select:
SSID1
Enable SSID:
SSID :
VEJA_
FOLHA
Authentication Protocol:
WPA-PSK
Recommend WPA-PSK/WPA2-PSK
WAN Connection:
AES
Wi-Fi Password
Key Display
Advanced WLAN Configuration
Hidden Hotspot
Channel:
6
Mode:
b/g/n
Bandwidth:
20MHz
Guard Interval:
400ns
Transmission Power:
100%
Save/Apply

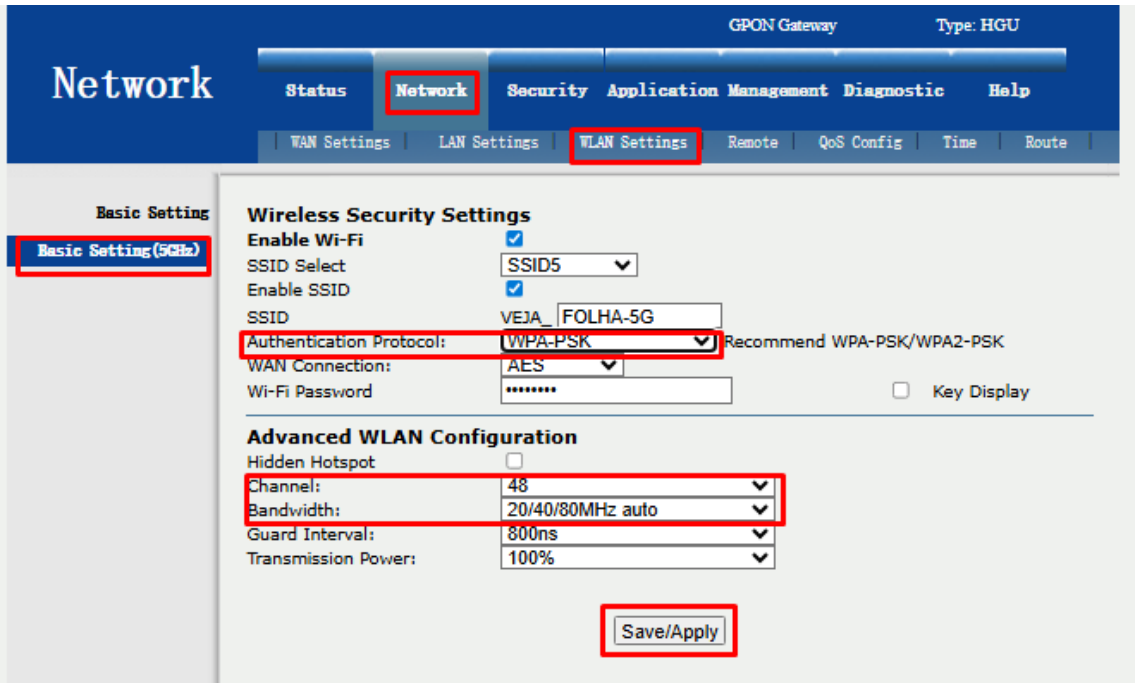
GPON Gateway
Type: HGU
Network
Status
Network
Security
Application
Management
Diagnostic
Help
WAN Settings
LAN Settings
WLAN Settings
Remote
QoS Config
Time
Route
Basic Setting
Basic Setting(5GHz)
Wireless Security Settings
Enable Wi-Fi
SSID Select
SSID5
Enable SSID
SSID
VEJA_ FOLHA-5G
Authentication Protocol:
WPA-PSK
Recommend WPA-PSK/WPA2-PSK
WAN Connection:
AES
Wi-Fi Password
Key Display
Advanced WLAN Configuration
Hidden Hotspot
Channel:
48
Bandwidth:
20/40/80MHz auto
Guard Interval:
800ns
Transmission Power:
100%
Save/Apply

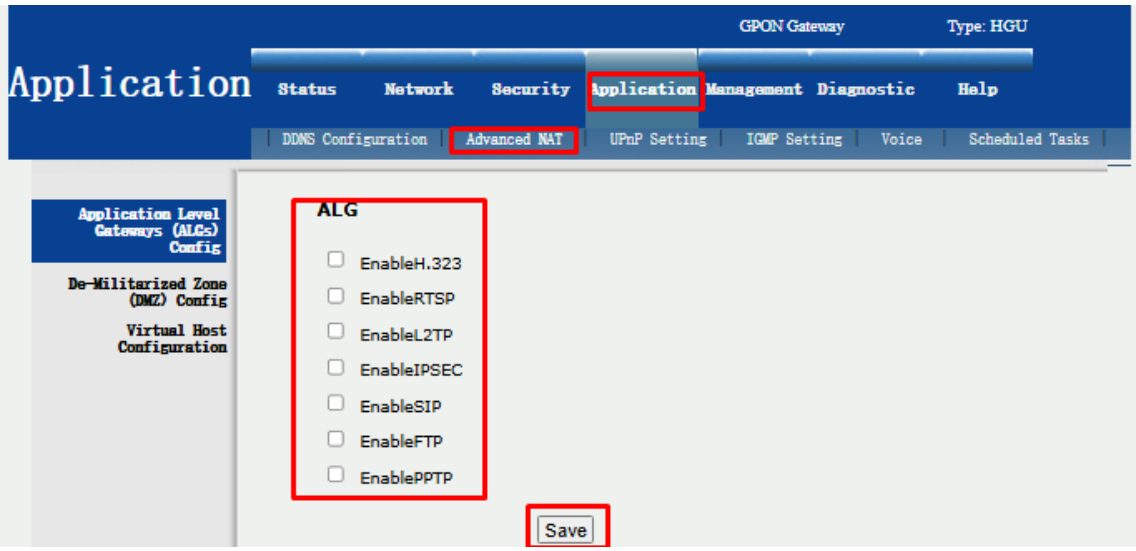
GPON Gateway
Type: HGU
Application
Status
Network
Security
Application
Management
Diagnostic
Help
DDNS Configuration
Advanced NAT
UPnP Setting
IGMP Setting
Voice
Scheduled Tasks
Application Level Gateways (ALGs) Config
De-Militarized Zone (DMZ) Config
Virtual Host Configuration
ALG
EnableH.323
EnableRTSP
EnableL2TP
EnableIPSEC
EnableSIP
EnableFTP
EnablePPTP
Save

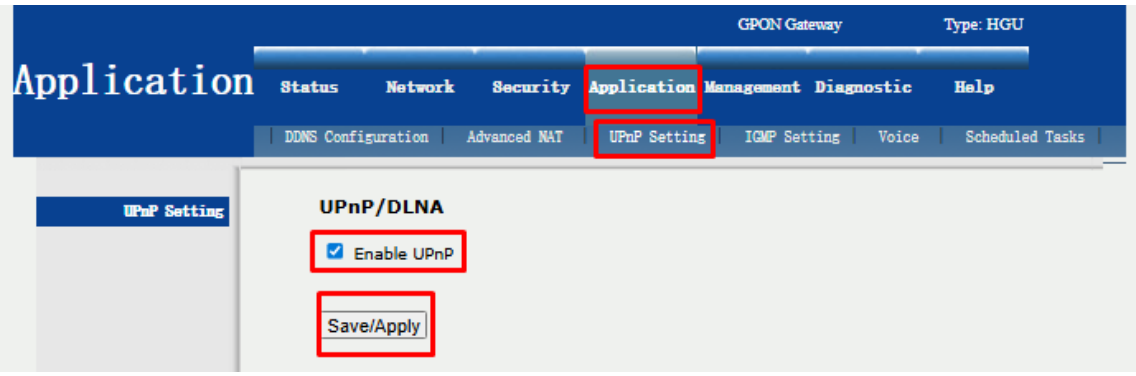
GPON Gateway
Type: HGU
Application
Status
Network
Security
Application
Management
Diagnostic
Help
DDNS Configuration
Advanced NAT
UPnP Setting
IGMP Setting
Voice
Scheduled Tasks
UPnP Setting
UPnP/DLNA
Enable UPnP
Save/Apply