

# **CHE454 LAB PROJECT**

## **PARTICLE SIZE REDUCTION**

### **TEAM MEMBERS:**

**ANUNAY MINJ (220183)**  
**KAUSHALENDRA SINGH (220511)**  
**RAUNAK JALAN (220875)**  
**SUPRIYA SINHA (221107)**  
**TAMANNA MEENA (221119)**

# OVERVIEW

**Introduction**

03

**Aim**

04

**Size Reduction**

05

**Equipment**

06

**Size Reduction Method**

07

**Motive Behind this Experiment**

08

**Challenges**

09

**Procedure**

10



**Assumption**

11

**Formula**

12

**SIZE REDUCTION THEORIES**

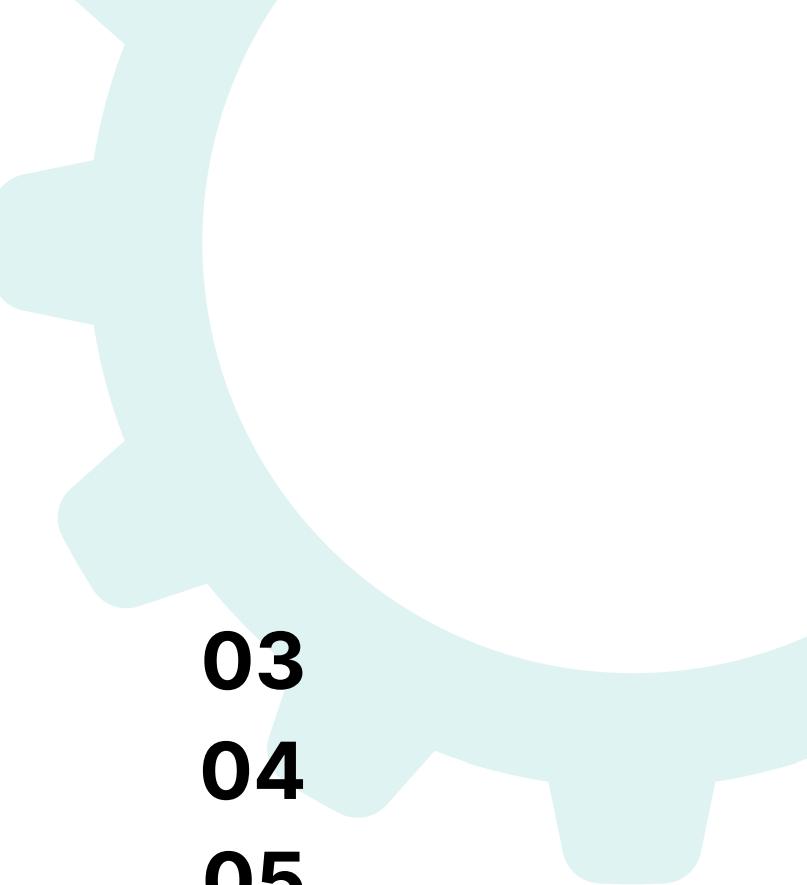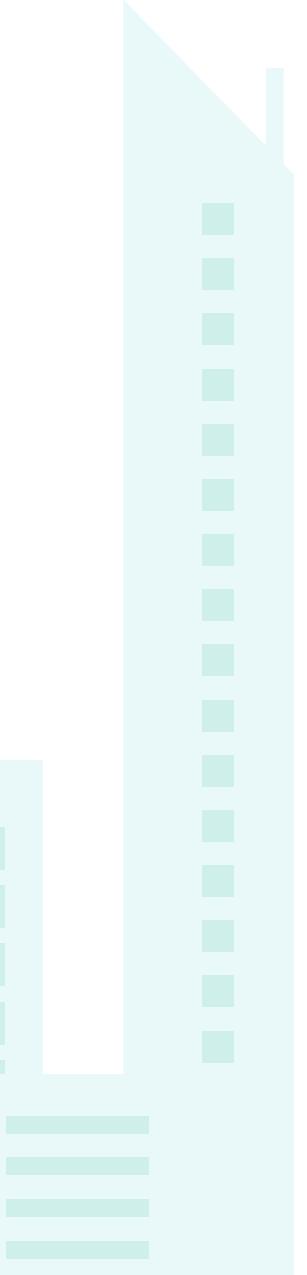

## **What is the meaning of size reduction ?**

Size refers to physical Dimension of an object.

Reduction refers to decrement or the process of decreasing the size.



# SIZE REDUCTION

Size reduction (also called comminution) is the process of breaking down large solid materials into smaller particles to improve processing, handling, and efficiency. This is widely used in industries such as mining, pharmaceuticals, food processing, and construction.

## Why is Size Reduction Important?

Increases Surface Area → Enhances reaction rates in chemical processes.

Improves Material Handling → Easier transportation & mixing.

Enhances Efficiency → Reduces processing time and improves machine performance.

Optimizes Particle Size Distribution → Ensures uniformity in end products.

Reduces Energy Consumption → Optimized crushing/grinding requires less power.

## Advantages of size reduction

- Content uniformity
- Uniform flow
- Effective drying
- Increases surface area or viscosity
- Uniform mixing and drying
- Improve rate of absorption . Smaller the particles greater is absorption.
- Improve dissolution rate.

## Disadvantages of size reduction

- Drug degradation
- Contamination

# Motive Behind This Experiment

## Experimental Determination of Feed & Product Size

We are experimentally determining the diameter of feed and crushed product.

This helps in analyzing size reduction effects and estimating the specific surface area change.

## Analyze Specific Surface Area & Its Effect

Crushing increases specific surface area, improving reaction rates, mixing, and material processing efficiency.

A higher surface area allows for faster chemical reactions, better heat transfer, and uniform dispersion in various processes.

## Estimate Power Consumption for Crushing

Power consumption increases as material is reduced in size due to higher energy demand for breaking particles.

We aim to calculate the energy required for manual crushing and compare it with machine-based processes.

## Common Equipment Used for Size Reduction

**Jaw Crushers** – For coarse crushing of hard materials.

**Ball Mills** – Used for fine grinding after initial crushing.

**Hammer Mills** – Break down materials using repeated impact.

**Roll Crushers** – Compress and crush material between two rotating cylinders.



## Common Equipment Used for Size Reduction

**Jaw Crushers** – For coarse crushing of hard materials.

**Ball Mills** – Used for fine grinding after initial crushing.

**Hammer Mills** – Break down materials using repeated impact.


**Roll Crushers** – Compress and crush material between two rotating cylinders.



# Size Reduction Methods


## Impact

Air Classifying Mill  
Universal Mill  
Pulverizer Mill

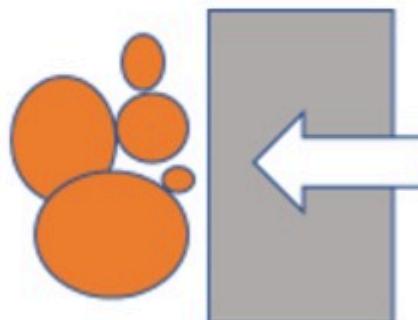


## Compression

Jaw Crusher

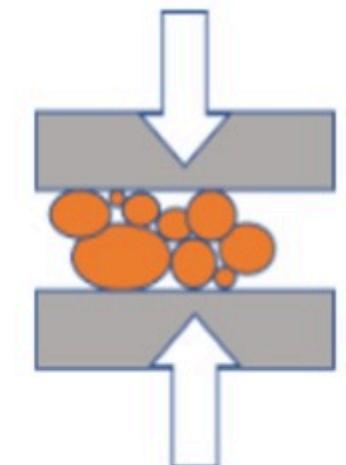


## Shear

Hammer Mill  
Pulverizer mill  
Chopper Mill

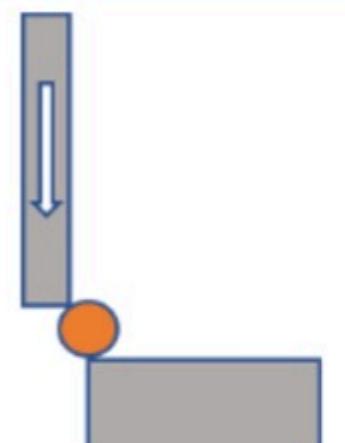

## Attrition

Ball mills  
Roller Mills

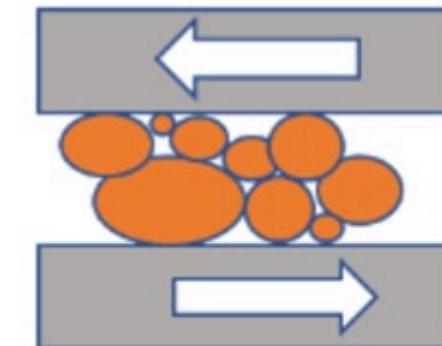

# Challenges in Manual Crushing

**Labor-Intensive:** Requires significant human effort, leading to fatigue.

**Inconsistency:** Particle size may vary due to manual limitations.

**Higher Energy Input:** Manual effort per unit mass is much greater than machine crushing.

**Time-Consuming:** Takes significantly longer compared to automated processes.

## Where Manual Labor is Preferred Over Machinery

**Small-Scale Processing** – For low material volumes, using machinery is inefficient (e.g., lab experiments).

**Remote Areas** – In places with limited electricity or infrastructure, manual labor is the only option (e.g., rural mining).

**Delicate Materials** – Some materials need careful handling to prevent damage (e.g., fragile minerals).

**Cost Constraints** – Machinery is expensive to buy, run, and maintain, making manual methods more viable in small businesses.

**Precision & Flexibility** – Manual crushing allows better control over particle size compared to fixed-output machines.



# PROCEDURE:

In this experiment, we begin by selecting six different sizes of brick particles. Each sample is carefully weighed to determine its initial mass. Additionally, for each sample, the diameters of ten individual particles are measured using a vernier caliper to establish their average initial size. Next, we subject the samples to a controlled crushing process using a hammer, ensuring that the applied force remains consistent across all samples. This step is crucial in minimizing variations in the energy imparted to the particles. As a result of the crushing, some fine particles may scatter, leading to a slight loss in weight. Following the crushing process, we once again measure the diameters of the particles and record their new weights. This systematic approach helps in understanding the effect of controlled impact on particle size and weight reduction.





# Assumptions



## Sphericity Assumption:

We can not determine Sphericity here experimentally due to lack of information regarding the **actual** surface area of the particle. So, we have assumed sphericity to be **0.7** which is typical for feeds like bricks and rocks.



## Nominal Diameter Calculation:

We need the exact volume of the particles to find the nominal diameter but it is hard to determine that experimentally. So, we assumed that the volume of each particle are proportional to the measured diameter of the feed bricks.

$$\text{Measured Diameter} = (\text{Length} + \text{Breadth})/2$$



## Density Assumption:

We have assumed the density of the bricks to be 2000kg/m<sup>3</sup> or 2g/cm<sup>3</sup>.



# Nominal Diameter Calculation

Based on the assumption that the **exact volume** of the particle is **proportional to the measured diameter**, we can **determine the contribution** of each particle's volume in the the respective total feed volume.

**Volume Of Feed = Weight Of Feed/ Density**

**Get “Weights” For Each Particle In Volume Contribution**

**Determine The Particle Volume:  $W * V_{Total}$**

**Determine The Nominal Diameter:  $D_p = (6V/\pi)^{(1/3)}$**



# Nominal Diameter Sample Calculation (F1)

Measured Diameter	Diameter <sup>3</sup>	Weights = D <sup>3</sup> /Sum(D <sup>3</sup> )	Particle Volume	Nominal Diameter
2	8	0.179928928	8.096801763	2.491262698
2.2	10.648	0.239485403	10.77684315	2.740388968
1.5	3.375	0.075907517	3.415838244	1.868447024
1.7	4.913	0.110498853	4.972448383	2.117573294
1.3	2.197	0.049412982	2.223584184	1.619320754
1.5	3.375	0.075907517	3.415838244	1.868447024
1.3	2.197	0.049412982	2.223584184	1.619320754
1.8	5.832	0.131168189	5.902568485	2.242136428
1.2	1.728	0.038864648	1.748909181	1.494757619
1.3	2.197	0.049412982	2.223584184	1.619320754
				1.968097532

# Specific Surface Area Sample Calculation

dpi feed    dpi out

0.0197    0.0159

$$SSA\ Feed = \frac{6}{\delta_p \varphi} \times \sum \frac{x_i}{Dpi} = \frac{6}{2000 \times 0.7} \times \frac{0.117}{0.0197} = 0.025594$$

$$SSA\ Product = \frac{6}{\delta_p \varphi} \times \sum \frac{x_i}{Dpi} = \frac{6}{2000 \times 0.7} \times \frac{0.117}{0.0159} = 0.025594$$

# **Energy Required To Crush Calculation**

**Force Per Hammer Swing= 200 N**

**Hammer Swing Distance = 0.5m**

**Energy Transfer Efficiency = 30%**

**Number Of Strikes = 150 per sample**

**Time Taken = 1800 seconds**

**Feed Mass Processed = 765 grams**

**From these values, we get:  $W_i = 0.788$**

**From which we get the value of  $E = 1.634 \text{ kWh/tonne}$**

# **Results:**

**Average Nominal Diameter (Feed): 0.2293 m**

**Average Nominal Diameter (Product): 0.01327 m**

**Specific Surface Area (Feed): 0.18044 m<sup>2</sup>**

**Specific Surface Area (Product): 0.32915 m<sup>2</sup>**

# FORMULA:

**SPHERICITY**

$$\Phi = \frac{6V_p}{D_p S_p}$$

Where:

$V_p$  = Volume of particle

$S_p$  = Surface area of particle

$D_p$  = Equivalent diameter of particle

**Specific surface area**

$$SSA = \frac{6}{\delta_p \varphi} \times \sum \frac{x_i}{D_{pi}}$$

Where,

$\delta$ = Density of the material

$\varphi$ = Sphericity

$X_i$ = mass fraction

$D_{pi}$ = Nominal Diameter

# SIZE REDUCTION THEORIES

The energy requirement for particle size reduction is a function of input and output of particle size, hardness, strength and other properties of solids.

Various theories for energy requirement are:-

**Rittinger's theory**

**Kick's theory**

**Bond's theory.**

# Rittinger's theory

According to this theory energy E required for size reduction of unit mass is directly proportional to the new surface area produced.

$$E = KR (S_n - S_i) \dots (3)$$

Where

$S_i$  = initial surface area

$S_n$  = new specific surface area

$KR$  = Rittinger's constant.

$E$  = amount of energy

# Kick's Theory

- This theory states that the energy used in deforming a set of particles of equivalent shape is proportional to ratio of change in size.

$$E = K_k \ln \frac{d_i}{d_n} \dots\dots \quad (5)$$

Where

$K_k$  = Kick's constant

$D_i$  = diameter of particle in the initial stage

$D_n$  = diameter of the new particles.

# Bond's theory

This theory states that energy used in crack propagation is proportional to the new crack length produced.

It also states that deforming set of particles is proportional to change in dimensions.

$$E = 2K_B \left( \frac{1}{\sqrt{D_n}} - \frac{1}{\sqrt{D_i}} \right) \dots \quad (4)$$


Where

$K_B$  = Bond's work index.


$D_i$  = initial diameter

$D_n$  = new diameter.

# Size Reduction EQUIPMENTS jaw crusher

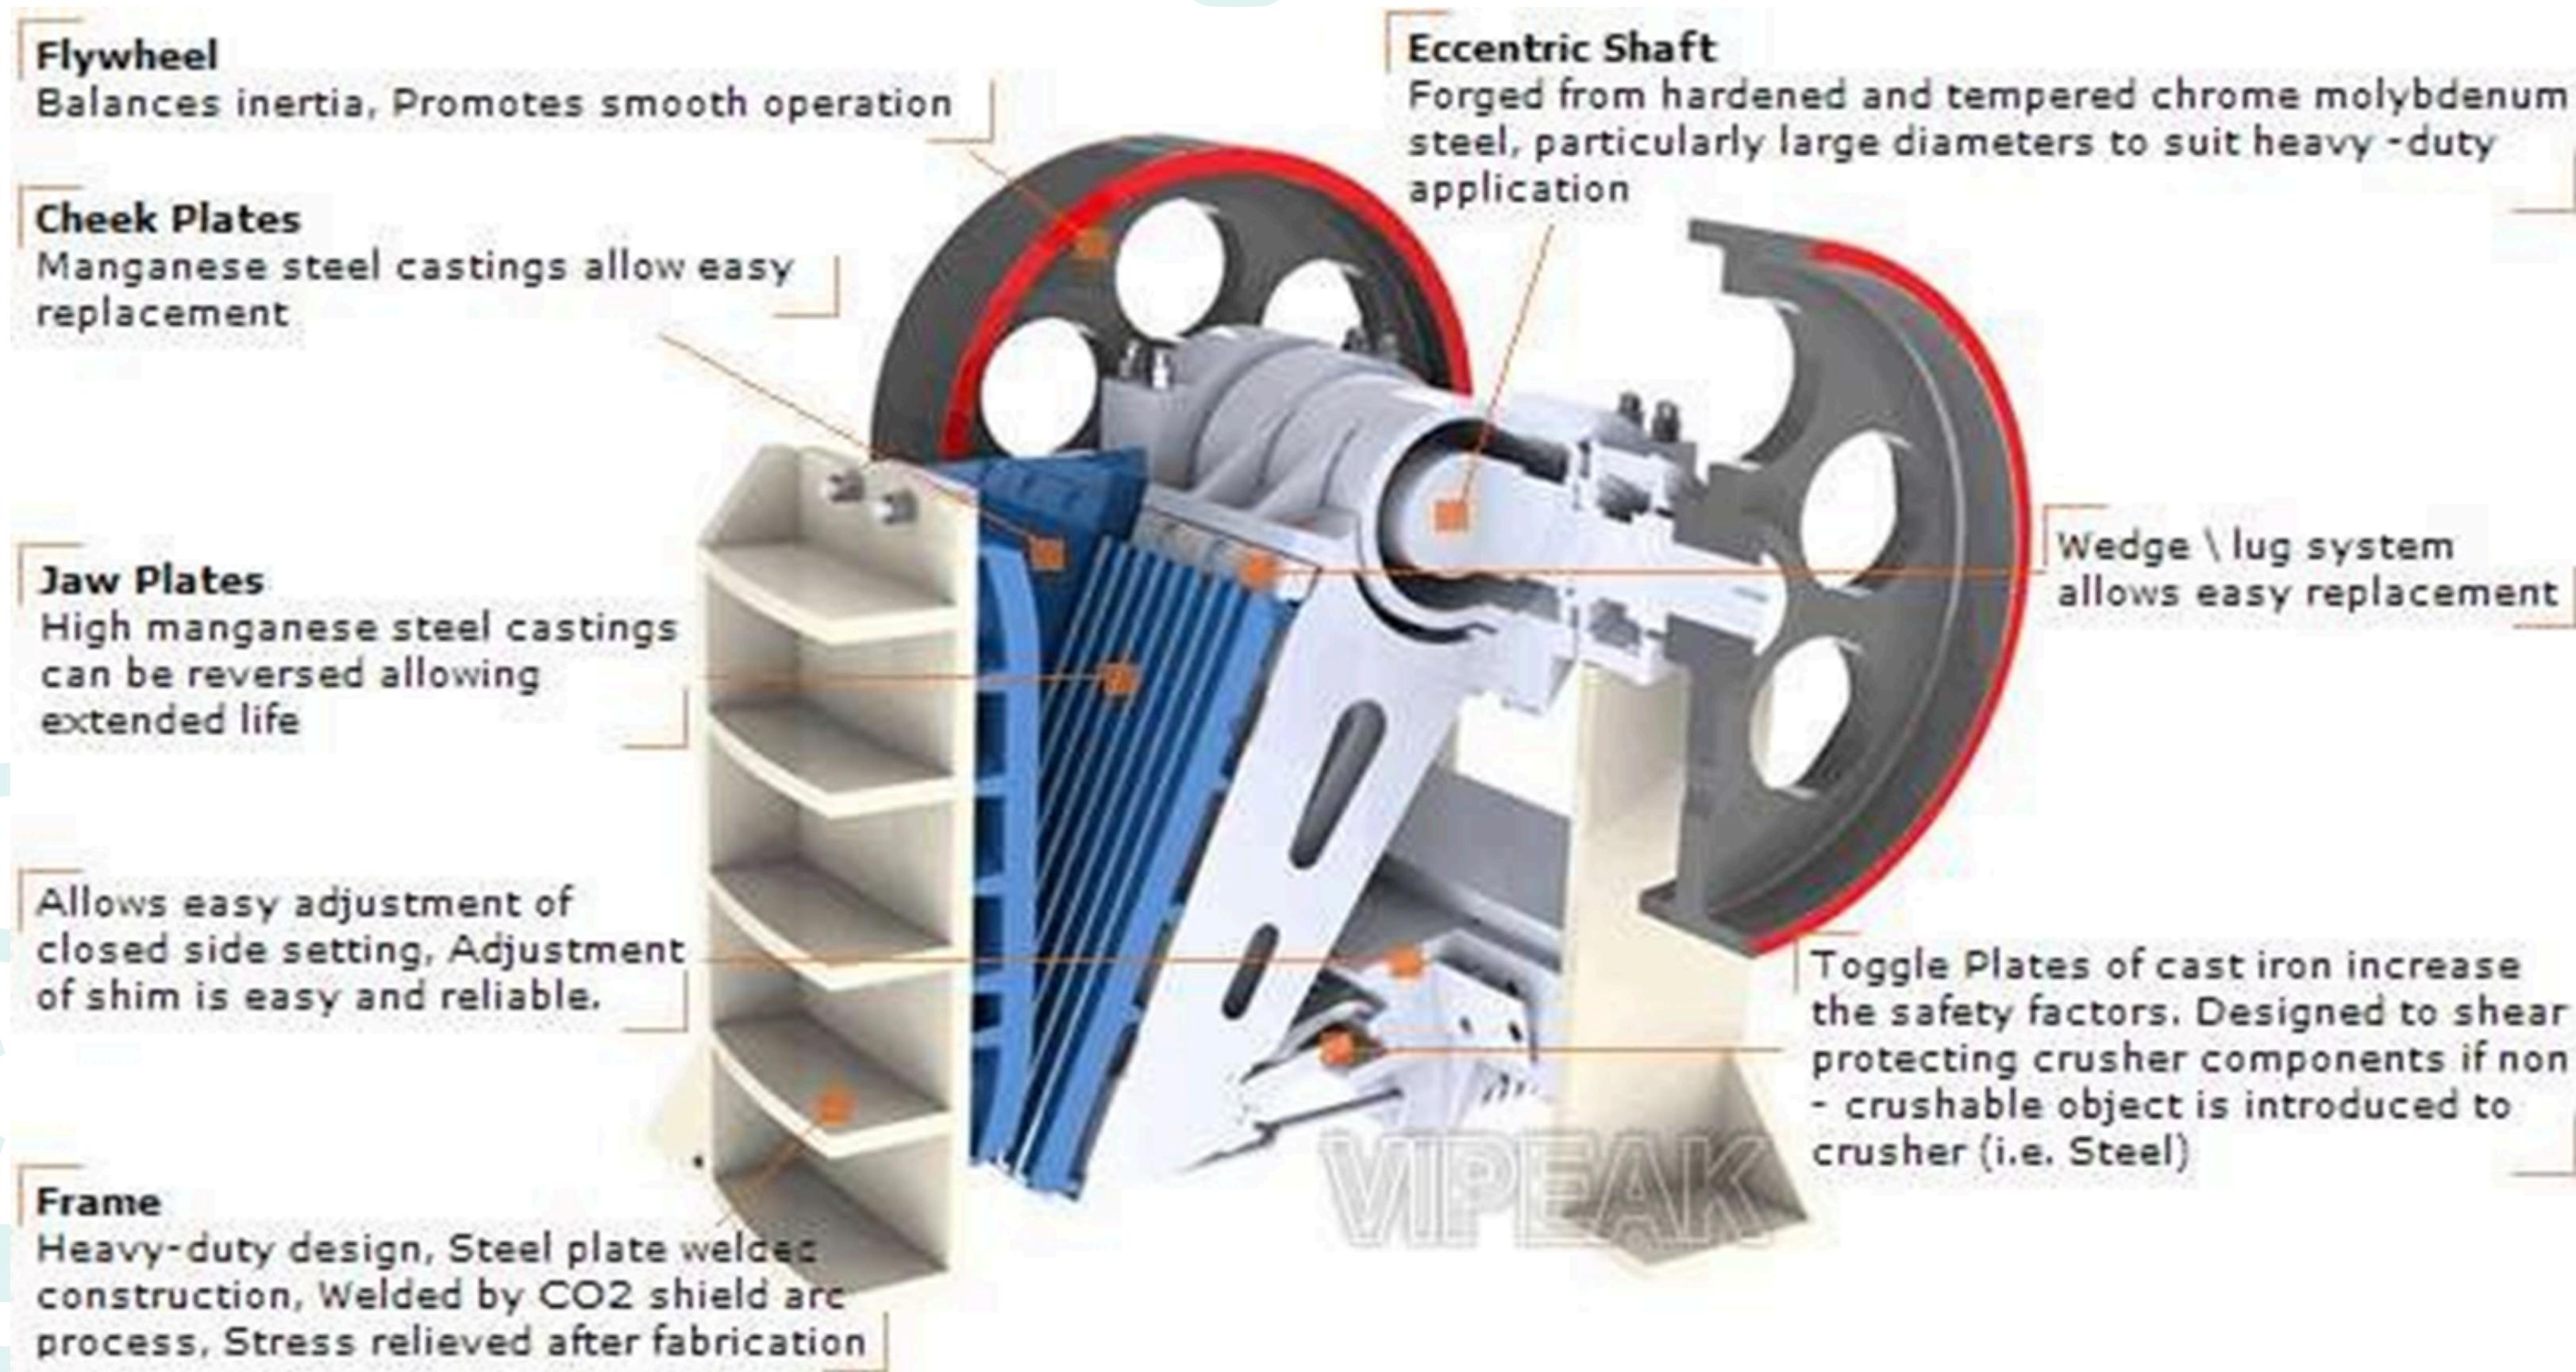

# Observations & Learning: Insights & Improvements

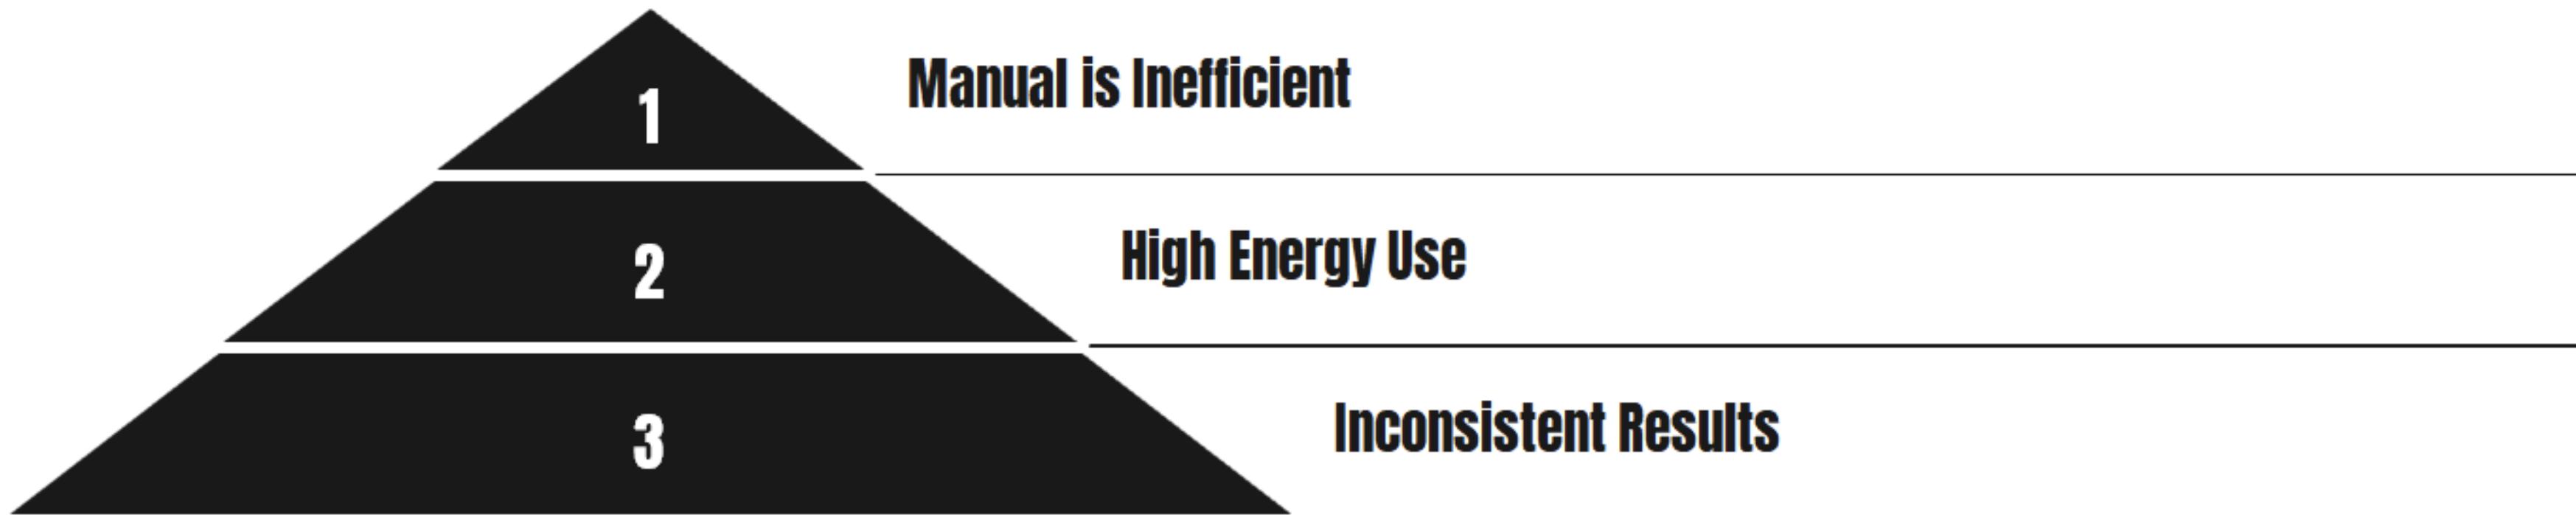

Manual crushing is inherently inefficient, demanding high levels of physical effort while yielding inconsistent particle sizes. Its energy consumption far exceeds that of mechanized alternatives, making it less sustainable for large-scale operations.

# Thank You

