


ISP - Failover

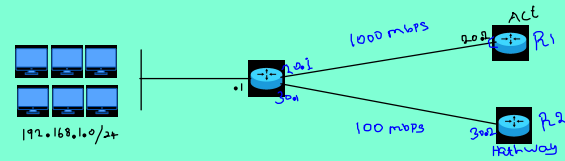


AD value - Administrative Distance
 Default = 1
 0 - 255

Default Route

0.0.0.0	0.0.0.0	20.2	10	↔
0.0.0.0	0.0.0.0	30.2	20	→

Floating Static

HSRP - Hot Standby Router Protocol

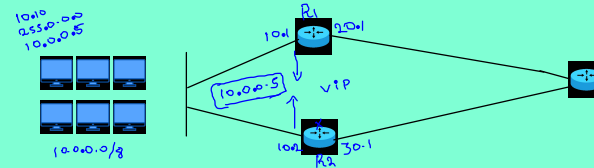

Active / Standby

highest Priority -

Default - 100

highest LAR IP - Active

Floating IP

hello packet - 3 Sec → 10 sec wait

HSRP ip - 224.0.0.2 -

Port - 1985

Preempt - Re-election