


```
ip route 0.0.0.0 0.0.0.0 20.0.0.2 10 0.0.0.0 / 0 - 20.0.2 10
ip route 0.0.0.0 0.0.0.0 30.0.0.2 11 0.0.0.0 / 0 - 30.0.2 11
```

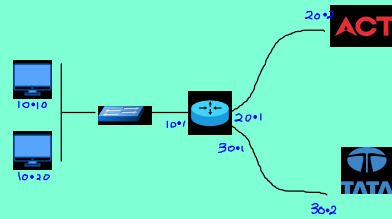

0.0.0.0 / 0 - 20.0.2
0.0.0.0 / 0 - 30.0.2


ACT - primary / TATA - secondary

AD - value

Administrative distance

0 - 255

ISP failover
floating static



DGr: 10.0.5

10.0.0.5

floating IP

HSRP

Hot stand by routing protocol

Active / stand-by

Election

Highest priority

Default priority = 100


Highest LAN IP =


Gig0

HA

VRRP

Open Standard

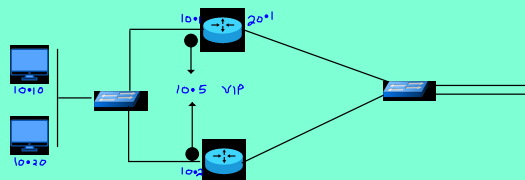

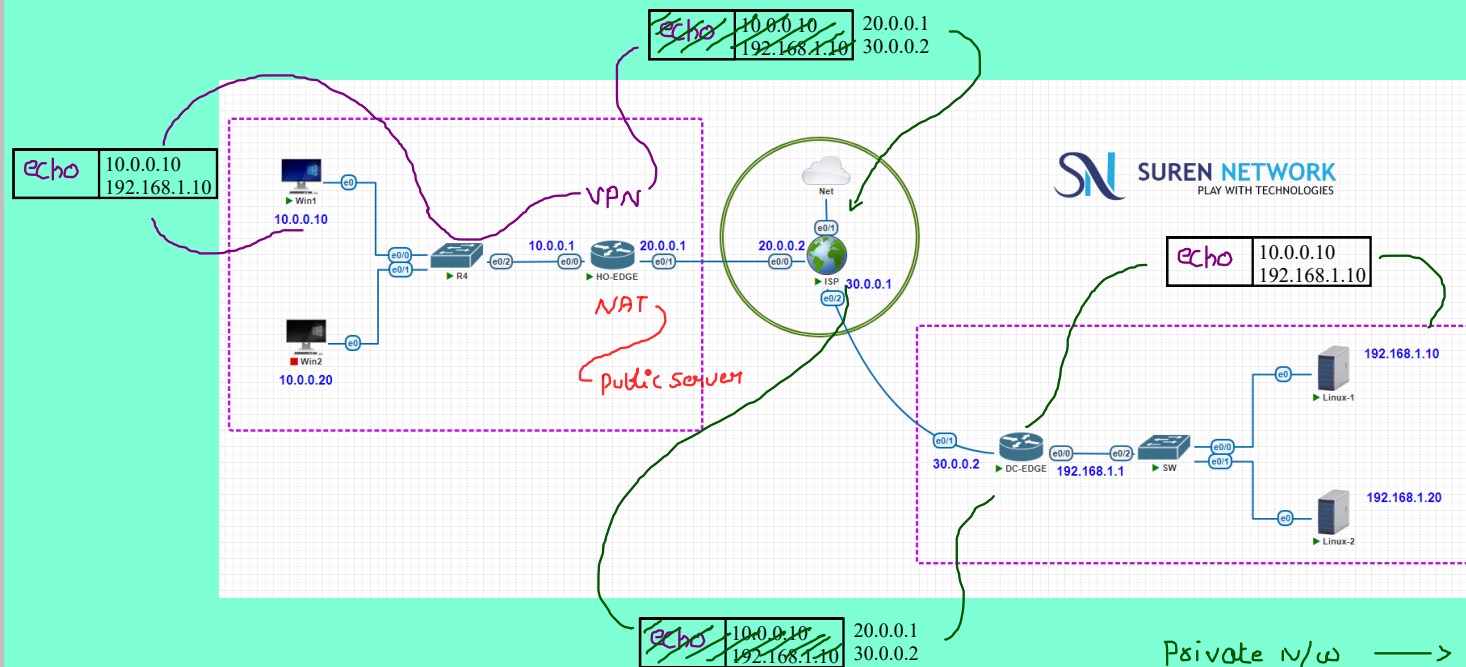

GIRE
VPN

IPSEC
VPN

VPN

Virtual Private Network

force / Both end static IP

Site to site VPN

Private N/w $\rightarrow$ Private N/w = VPN

Private N/w $\rightarrow$ Public N/w = NAT