

OSPF


Open shortest path first
 It is open standard protocol
 It is link state routing protocol
 Rip & eigrp is distance vector routing protocol
 It will send hello packet using 224.0.0.5 multicast ip
 To avoid broadcast issue in BMA network we have DR BDR DR-O
 To send update packet to DR BDR It will use 224.0.0.6
 It contains three table

- Neighbor table ---- It contains neighbor information
- Link state table ---- It contains map info
- Routing table ---- It contains only best route

Metric = COST

Metric formula

$$\text{Cost} = \frac{10^8}{\text{bandwidth in bits}}$$

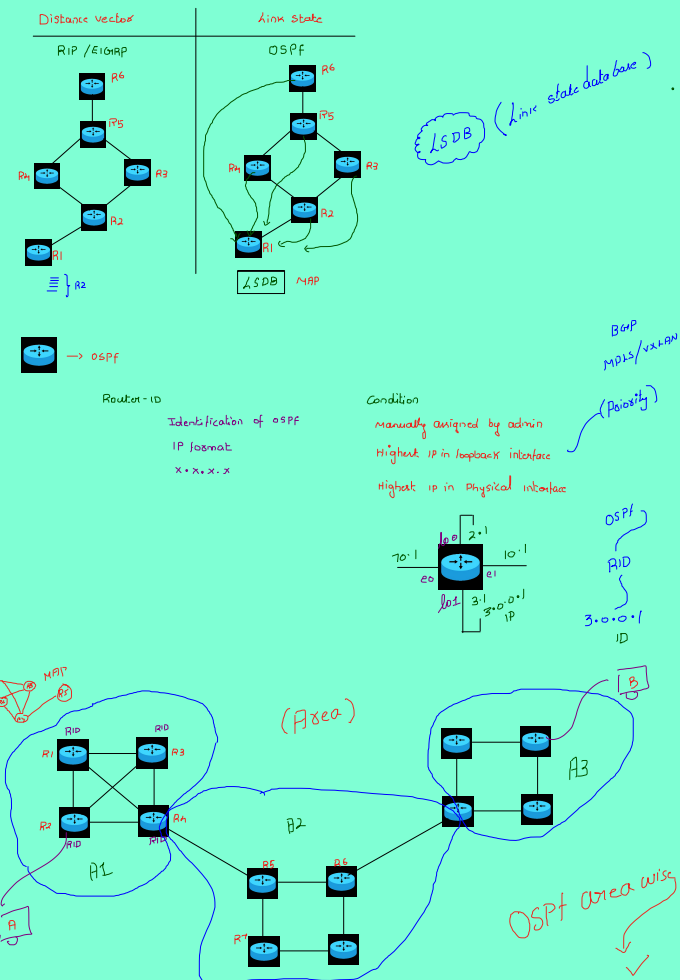

Hello
 SIP: x.x.x.x
 DIP: 224.0.0.5

Neighbourship Condition

Same n/w


Same AID

Unique AID

Same time

neighbour IP
 neighbour table

Hello time = 10 sec
 Dead time = $H \times 4 = 40 \text{ sec}$

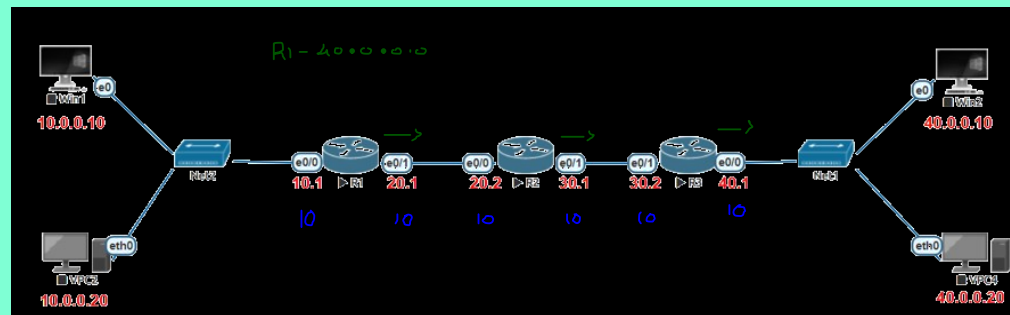

$$\text{Cost} = \frac{10^8}{\text{Bandwidth in bits}} = \frac{10^8}{10,000 \times 1000} = 10$$