


Layer 2 loop

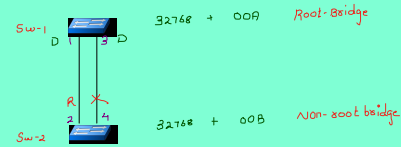


All the ports in root bridge is selected as designated port

Designated port = forwarding port = open port

Now we want find open port in non root bridge

Open port = forwarding = root port


- i) Lowest path cost
- ii) Lowest BID
- iii) Lowest Port No

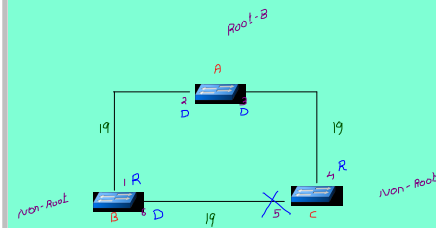

Cost = Bandwidth

$$100 \text{ Mbps} = 19$$

Segment
Low BID = Designated
High BID = Alternative / Block

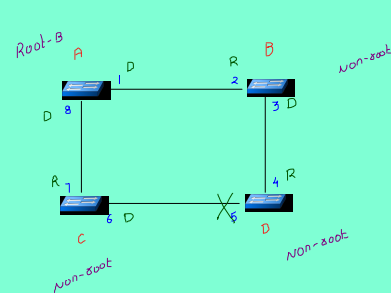

R → D