

Switching

Unmanageable




Hardware based device

Single broadcast domain

Manageable


Hardware + OS

We can create broadcast domain virtually

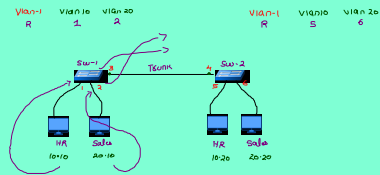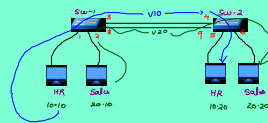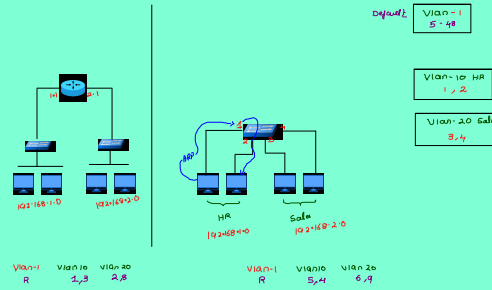

TRUNK

It is use to connect multiple vian interface

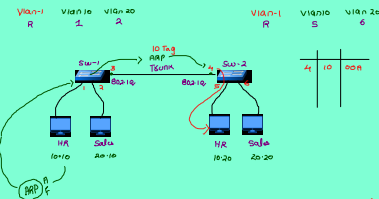

Tagging protocol
802.1Q
154
Interconnection
Cisco

