

Manual = Static

80 Pt = Time delay

IP conflict

DHCP

Dynamic Host configuration Protocol

It is use to give IP address automatically to client device

DHCP client 68

DHCP Server 67

DNS - 53

HTTP - 80

HTTPS - 443


AD - 389


RDP - 3389

NTP - 123

SSH - 22

Telnet - 23

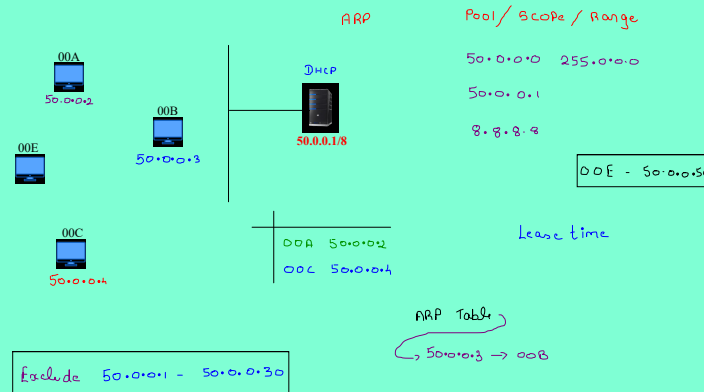

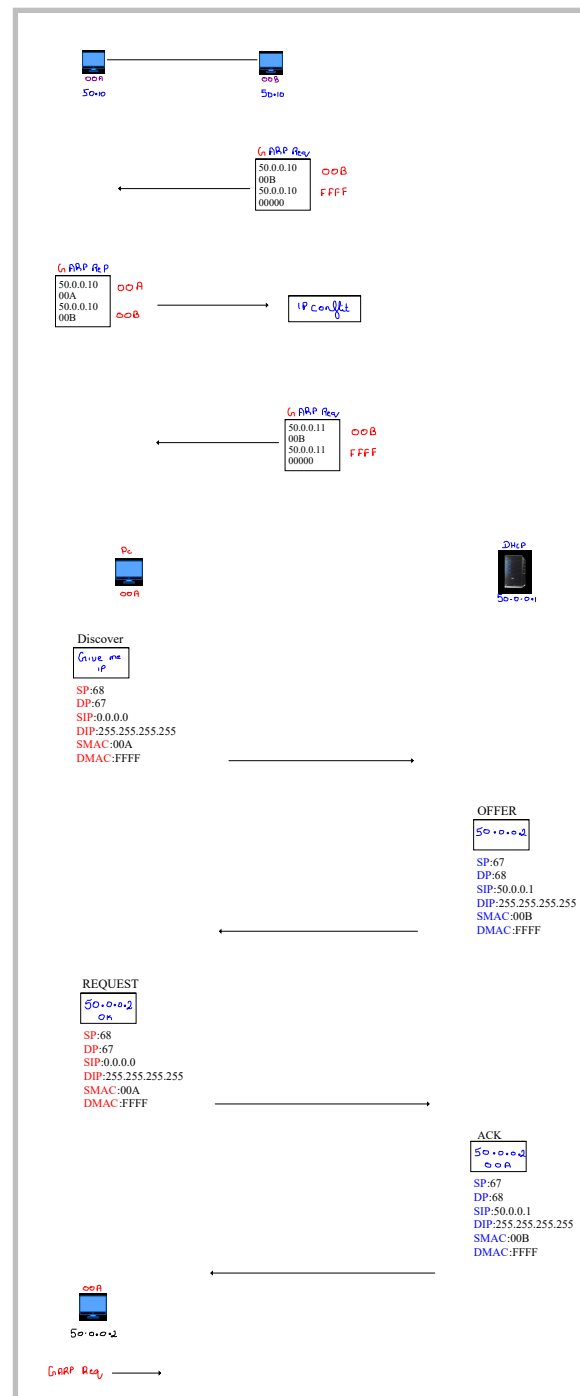

Automatic Private IP Address

169.254.x.x
→ Same

