

Static Routing
 Draw back
 * Time delay
 * Human error

Dynamic Routing Protocol

It is a Protocol that Exchange the Route automatically to your next Router


RIP
 EIGRP
 OSPF
 BGP

IGP
 Internal Gateway Protocol

EGP
 External Gateway Protocol

RIP

Routing information protocol
 It is one of dynamic routing protocol
 It will send update packet as broadcast 255.255.255.255
 It is work with help of UDP protocol
 Metric = hopcount
 Maximum metric = 15
 If M=16 is announce as invalid or poison route

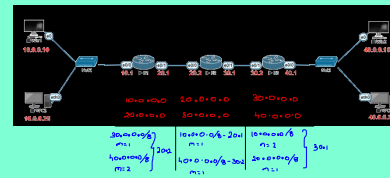


R1
 Invalid
 300000000
 100000000
 200000000

300: 100000000
 200: 255+255+255+255

metric

It is a calculation use to find the

Shortest Path



200000000 = 100000000
 100000000

200000000 = 100000000
 100000000

Lowest metric will
 select as Best Route

