

Data: SIP: 50.0.0.10
DIP: 60.0.0.11 mac

Route table

	Network	net mask	Gateway
Network	50.0.0.0/8	255.0.0.0	50.0.0.10
Host	50.0.0.10/32	255.255.255.255	127.0.0.1

Highest matching bits

Loop back IP

0.0.0.0 any
0.0.0.0 don't care
50.0.0.1 next hop

netmask → matching bits

1 - care

0 - don't care

10.0.0.10


128	64	32	16	8	4	2	1
1	1	1	1	1	1	1	1

255.0.0.0

50.0.0.20


128	64	32	16	8	4	2	1
1	1	1	1	1	1	1	1

255.255.0.0



Route table

162.10.0.0	255.255.0.0	162.10.1.10	201.1.0.0	255.255.255.0	201.1.0.10
162.10.1.10	255.255.255.255	127.0.0.1	201.1.0.10	255.255.255.255	127.0.0.1



Route table

Ping Error:


Destination Host unreachable

Request timed out

Static Routing

Echo SIP: 40.0.0.10
DIP: 10.0.0.10

Ping 40.0.0.10

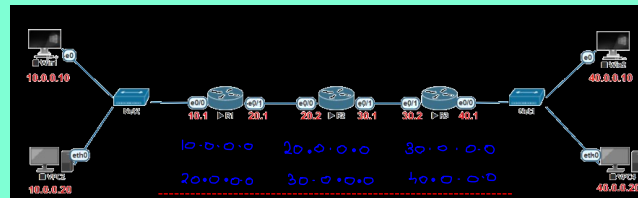

30.0.0.0/8 - 20.2	10.0.0.0/8 - 20.1	10.0.0.0/8 30.1
40.0.0.0/8 - 20.2	40.0.0.0/8 30.2	20.0.0.0/8 30.1

