





50 pc -> 400 ABC ?




- HUB**
- It is use to connect multiple network device
 - It is a layer 1 device
 - It is a broadcast device

Broadcast + Collision



Half duplex

- SWITCH**
- It is use to connect multiple network device
 - It is a layer 2 device
 - It is a broadcast device
 - It contains mac table
 - It will act as broadcast + unicast




MAC

1	A
2	B

Address learning

Broadcast + Unicast

ECHO 138.72.0.2 20.76.216.111

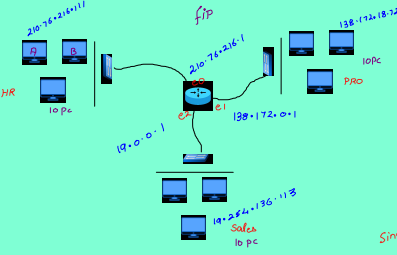

- DLink
- TPlink
- Netgear
- PoE 1/8/14/24/48
- Speed Ethernet 10Mbps
- Fast 100Mbps
- Giga 1000Mbps
- 1Gbps
- PoE ✓

Single broadcast domain

Router -> IP -> into

- ROUTER**
- It is use to breaks broadcast domain
 - It is a layer 3 device
 - It is a unicast device
 - It contains routing table
 - Routing table contains list of route
 - It is use to connect different network

Routing

n/w ID	20.76.216.0/24 - e0
Prefix	138.72.0.0/16 - e1
int name	19.0.0.0/8 - e2

Directly Connected n/w