

Switching

Unmanaged

Managed




Hardware based device

Hardware + OS

Single broadcast domain


we can create broadcast domain virtually

Vlan virtual local area network

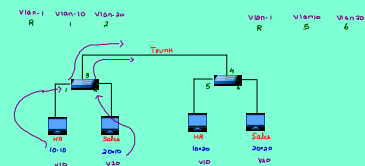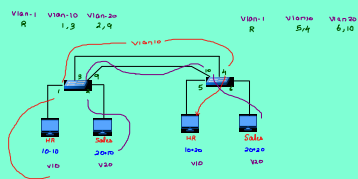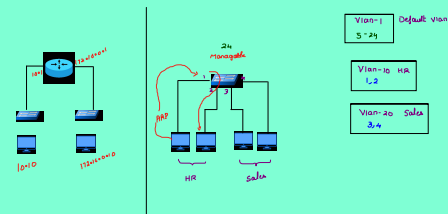

Trunk

It is carries multiple vlan traffic

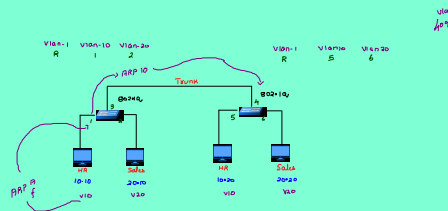

Tagging protocol

802.1q - open standard IEEE

ISL } Cisco proprietary
Inter switch link