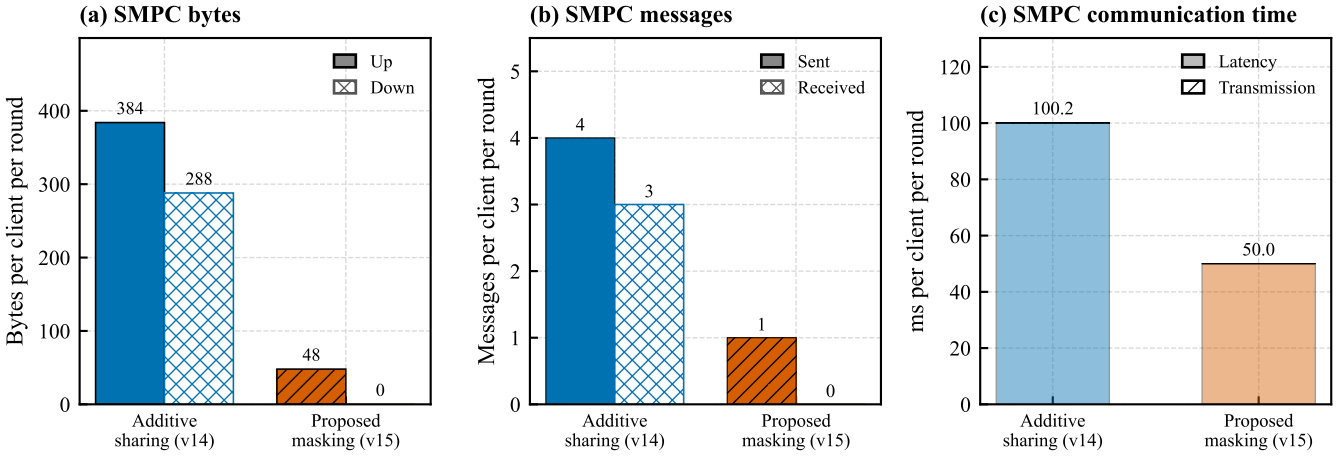


Steady state (after v15's one-time key exchange: 256 B up, 768 B down per client). Link model: RTT 50 ms, uplink 20 Mbit/s, downlink 50 Mbit/s.