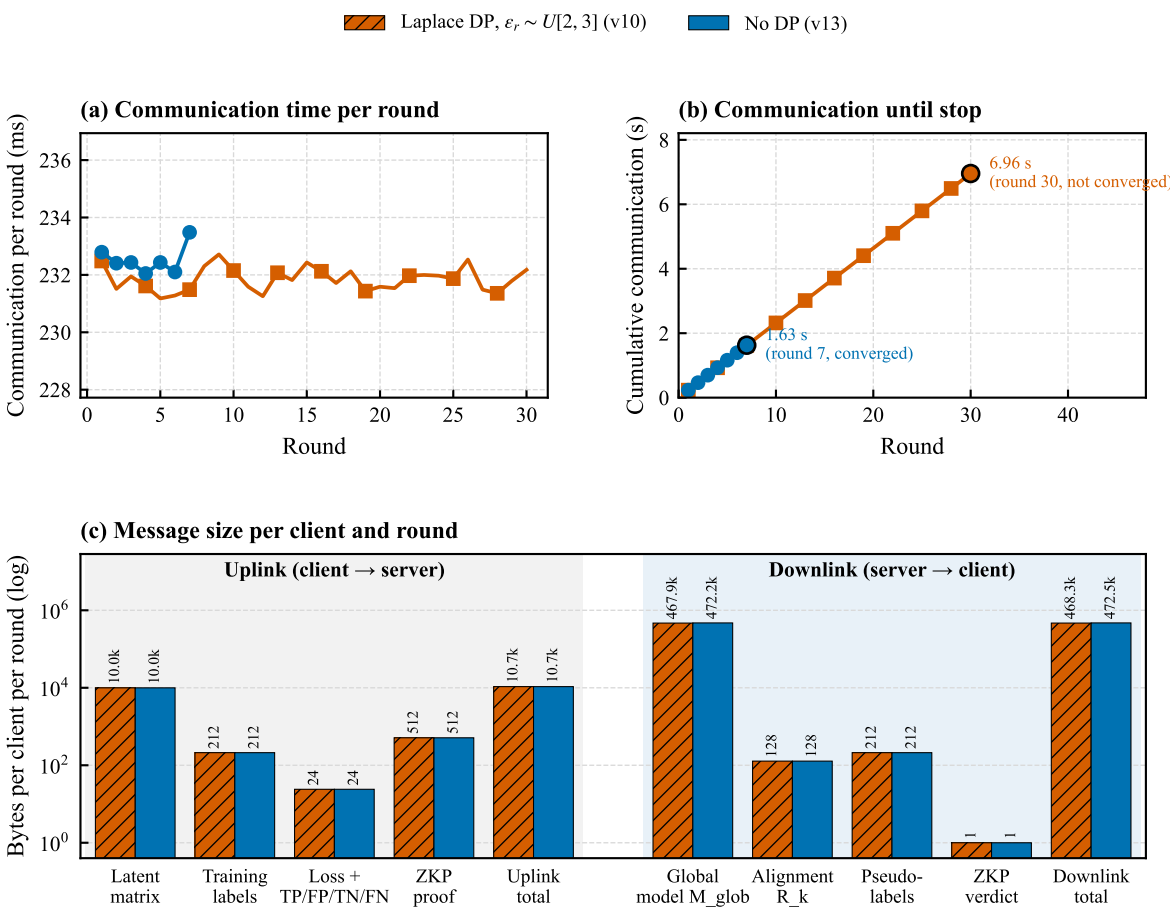


Link model: RTT 50 ms, uplink 20 Mbit/s, downlink 50 Mbit/s, 3 round trips per round; (a), (b): slowest client (clients communicate in parallel). (c) Mean over clients and rounds.