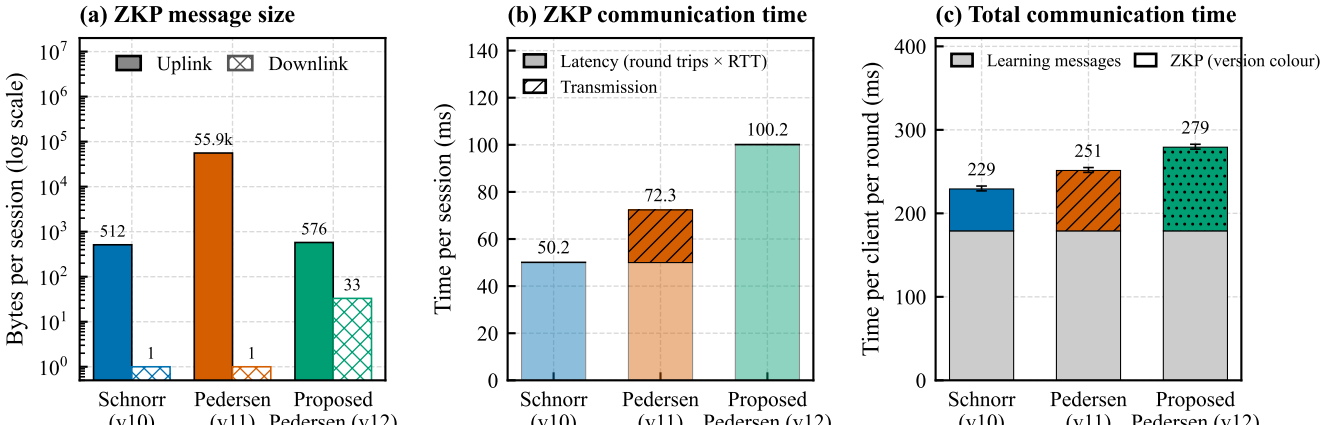


Link model: RTT 50 ms, uplink 20 Mbit/s, downlink 50 Mbit/s; whiskers in (c): min to max over clients and rounds.