




3.7W (Ta), 110W (Tc) Surface Mount 5-DFN (5x6)

NVMFS5C628NLT1G

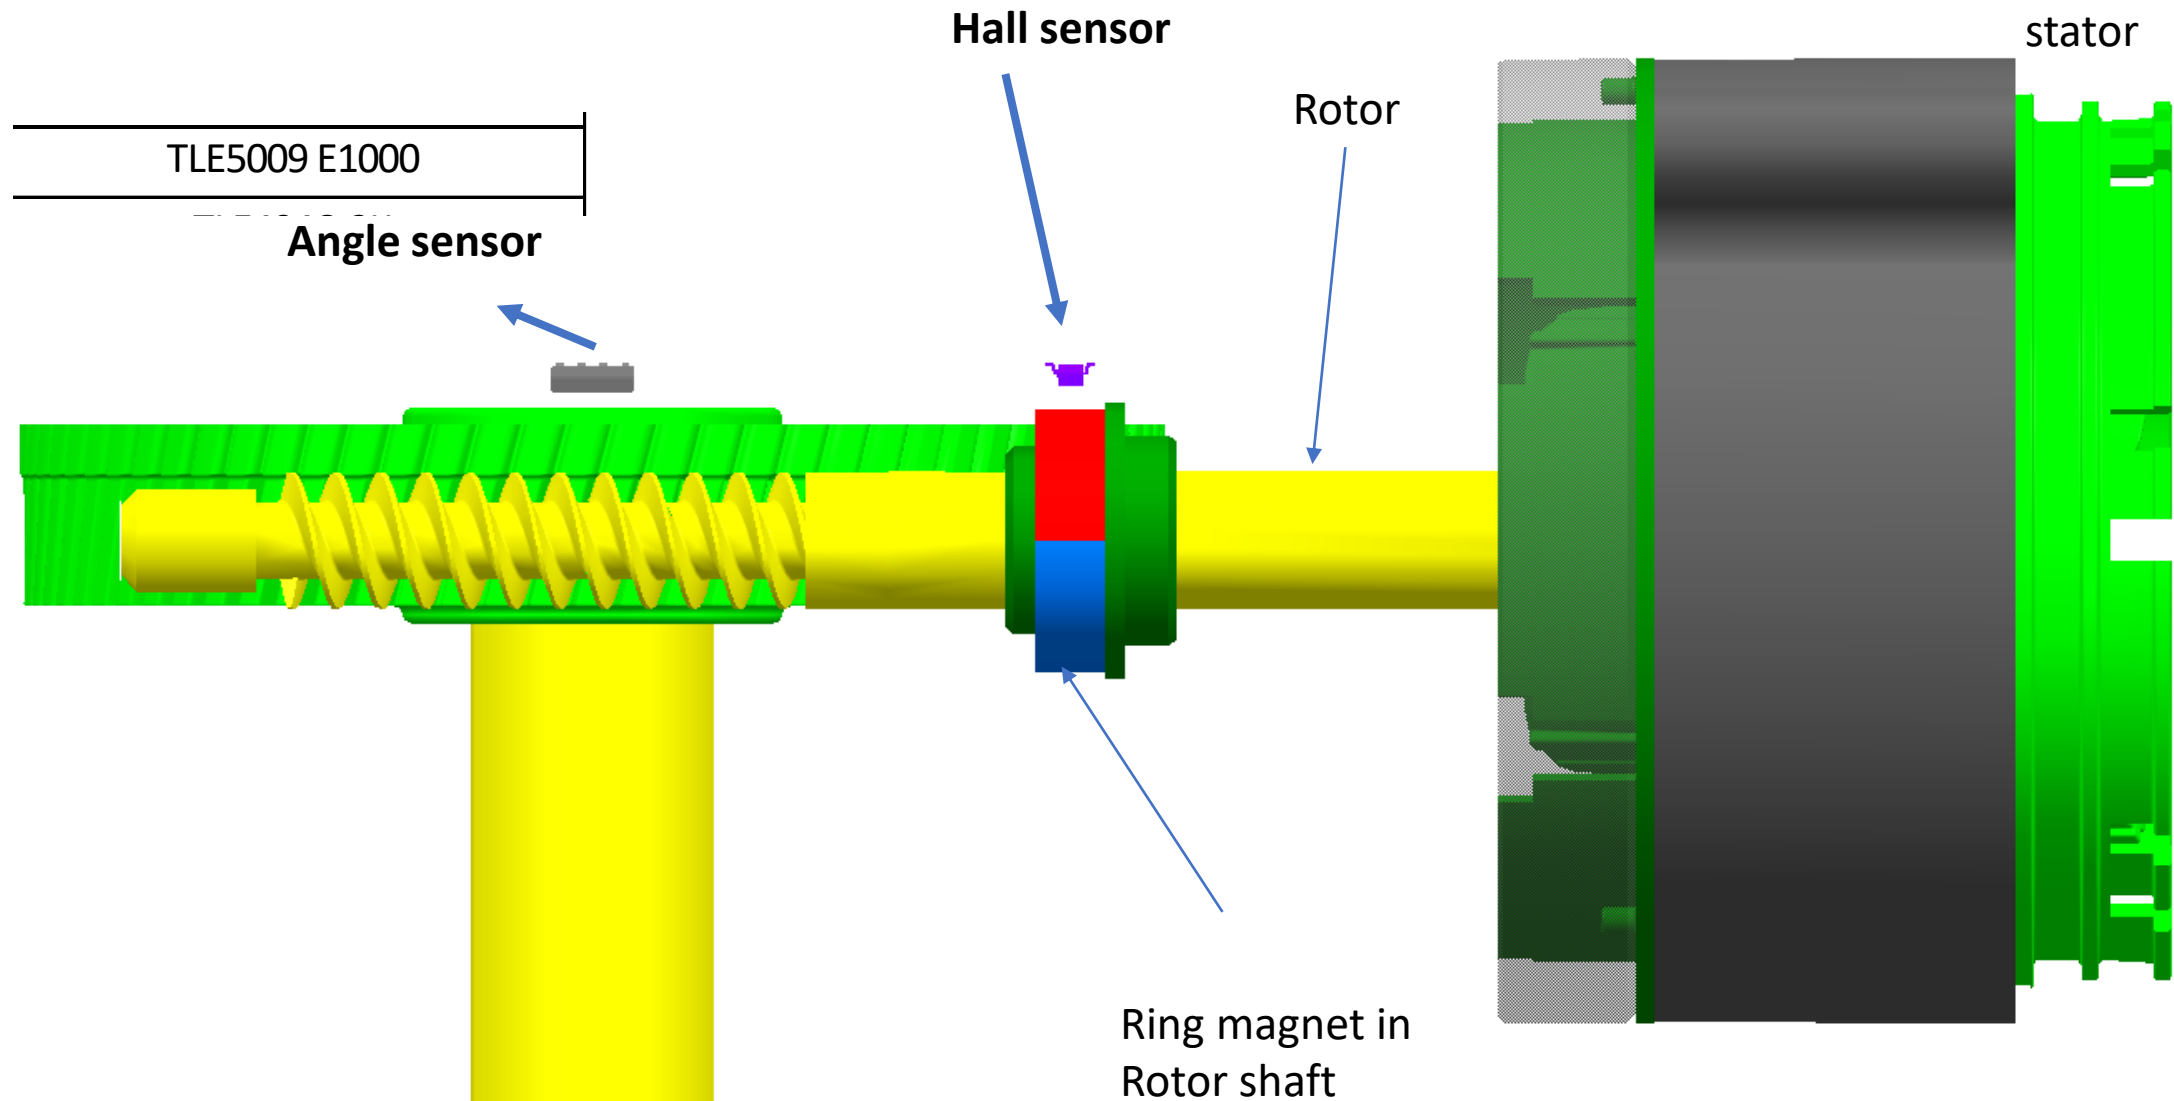


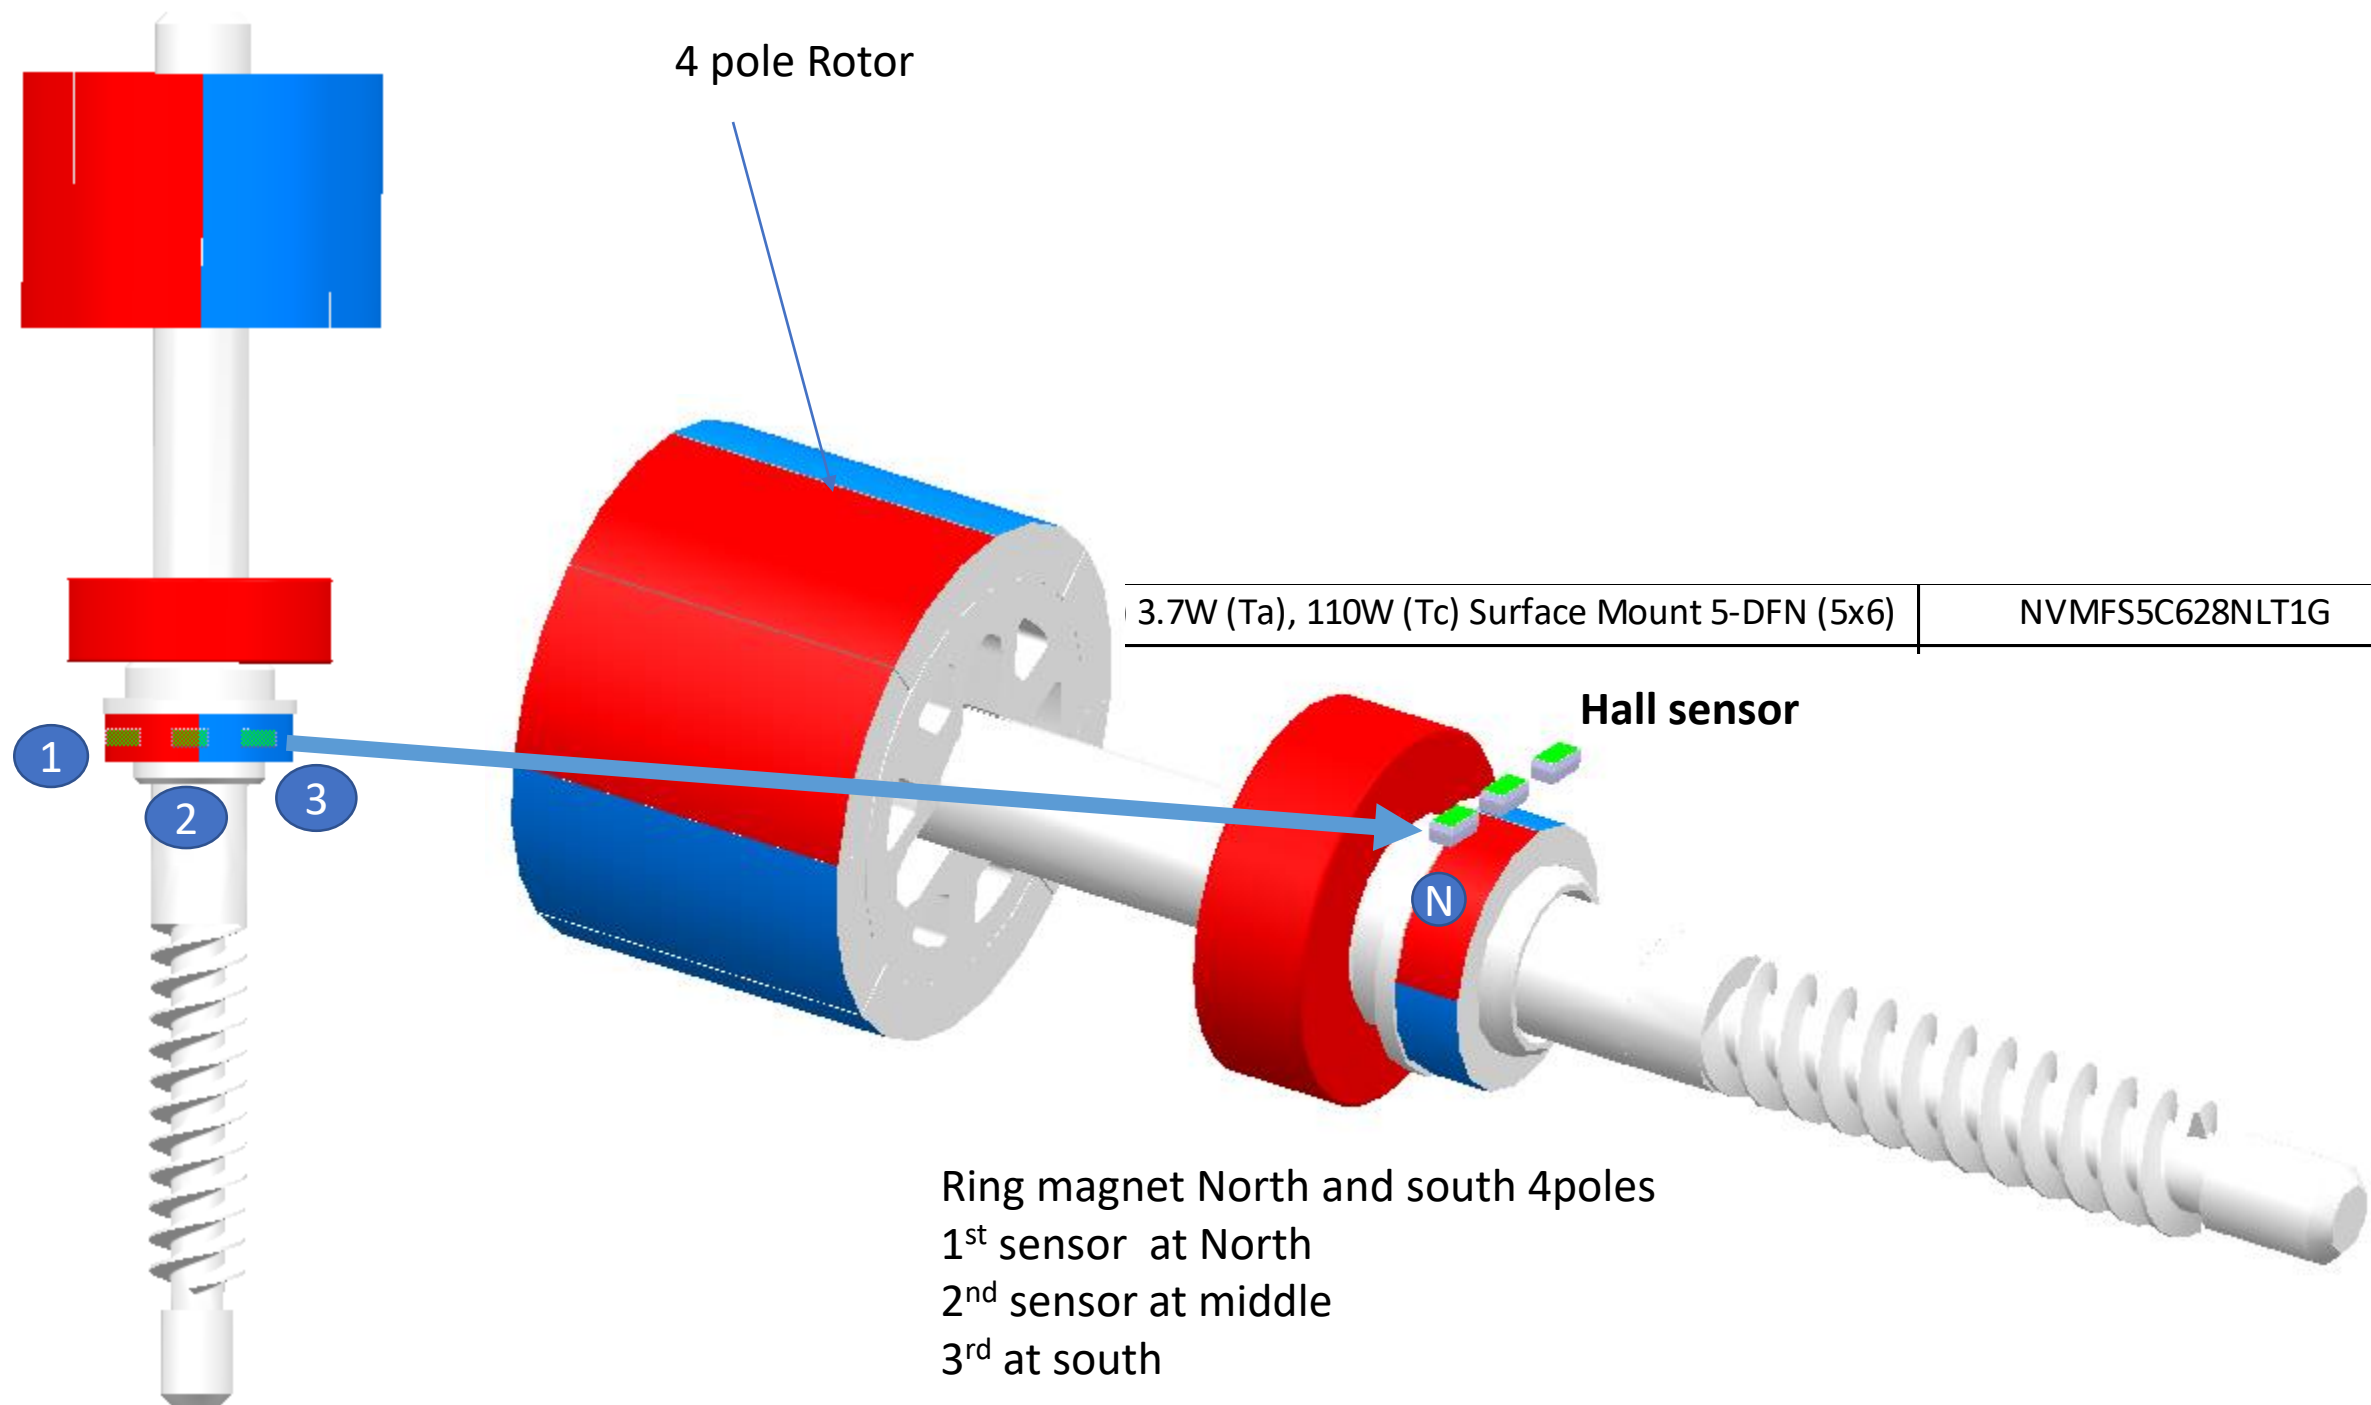

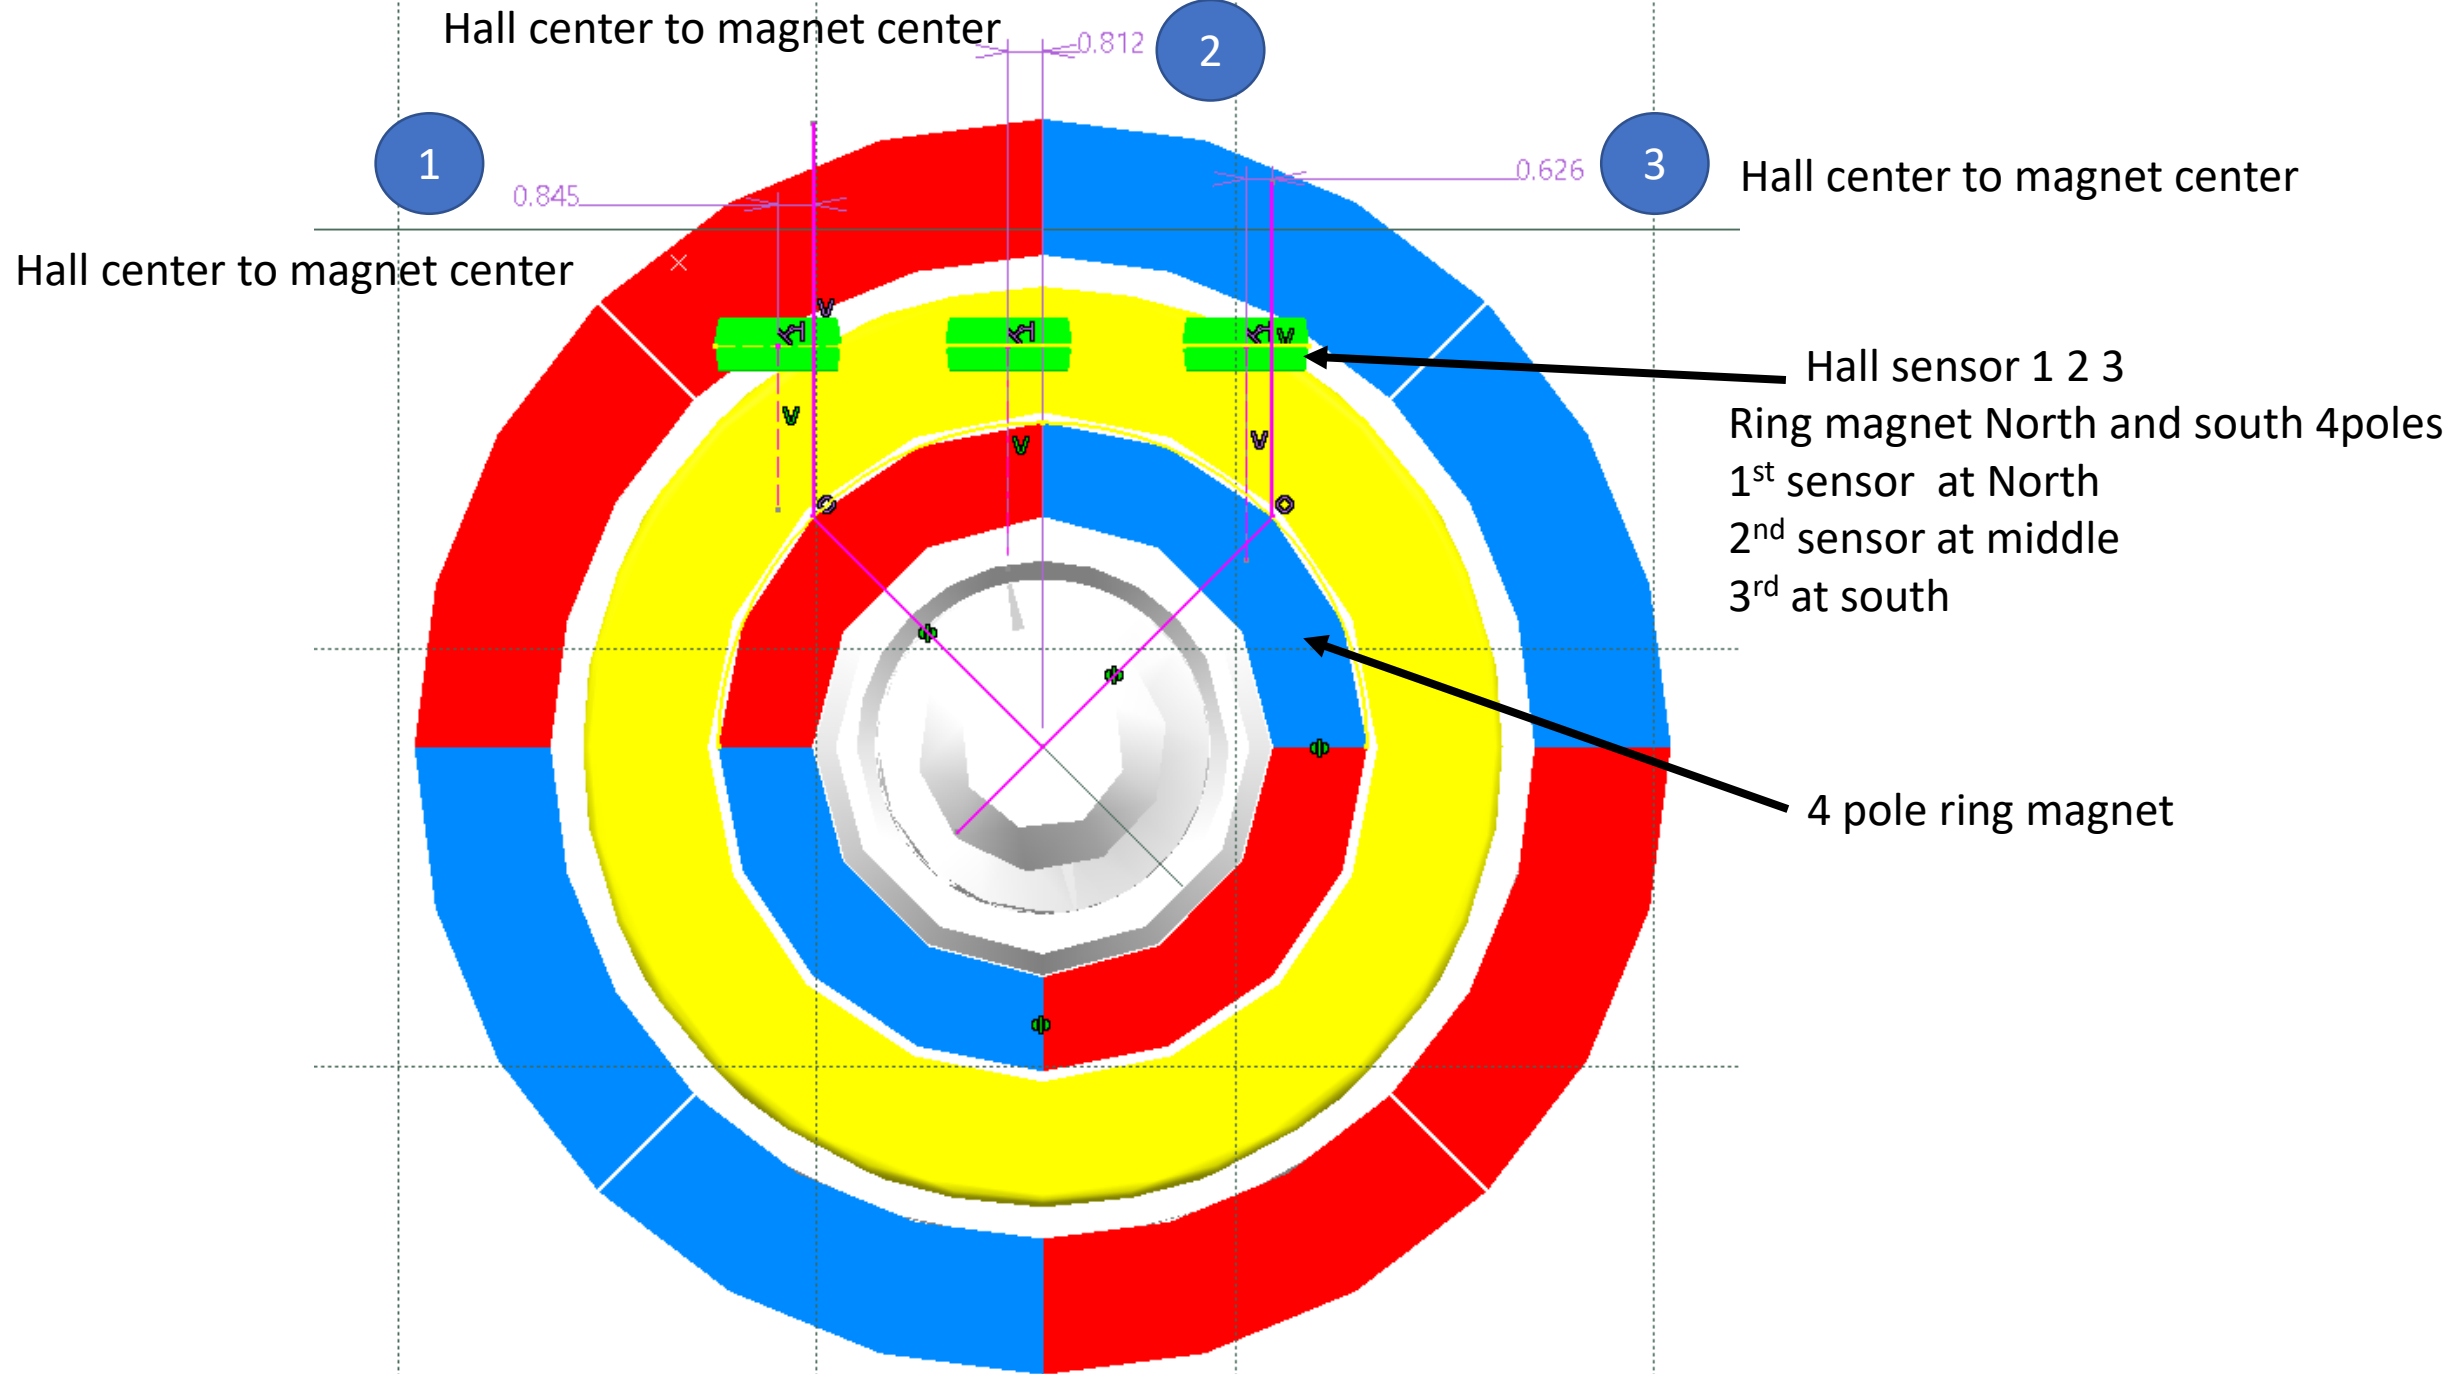


3.7W (Ta), 110W (Tc) Surface Mount 5-DFN (5x6)

NVMFS5C628NLT1G

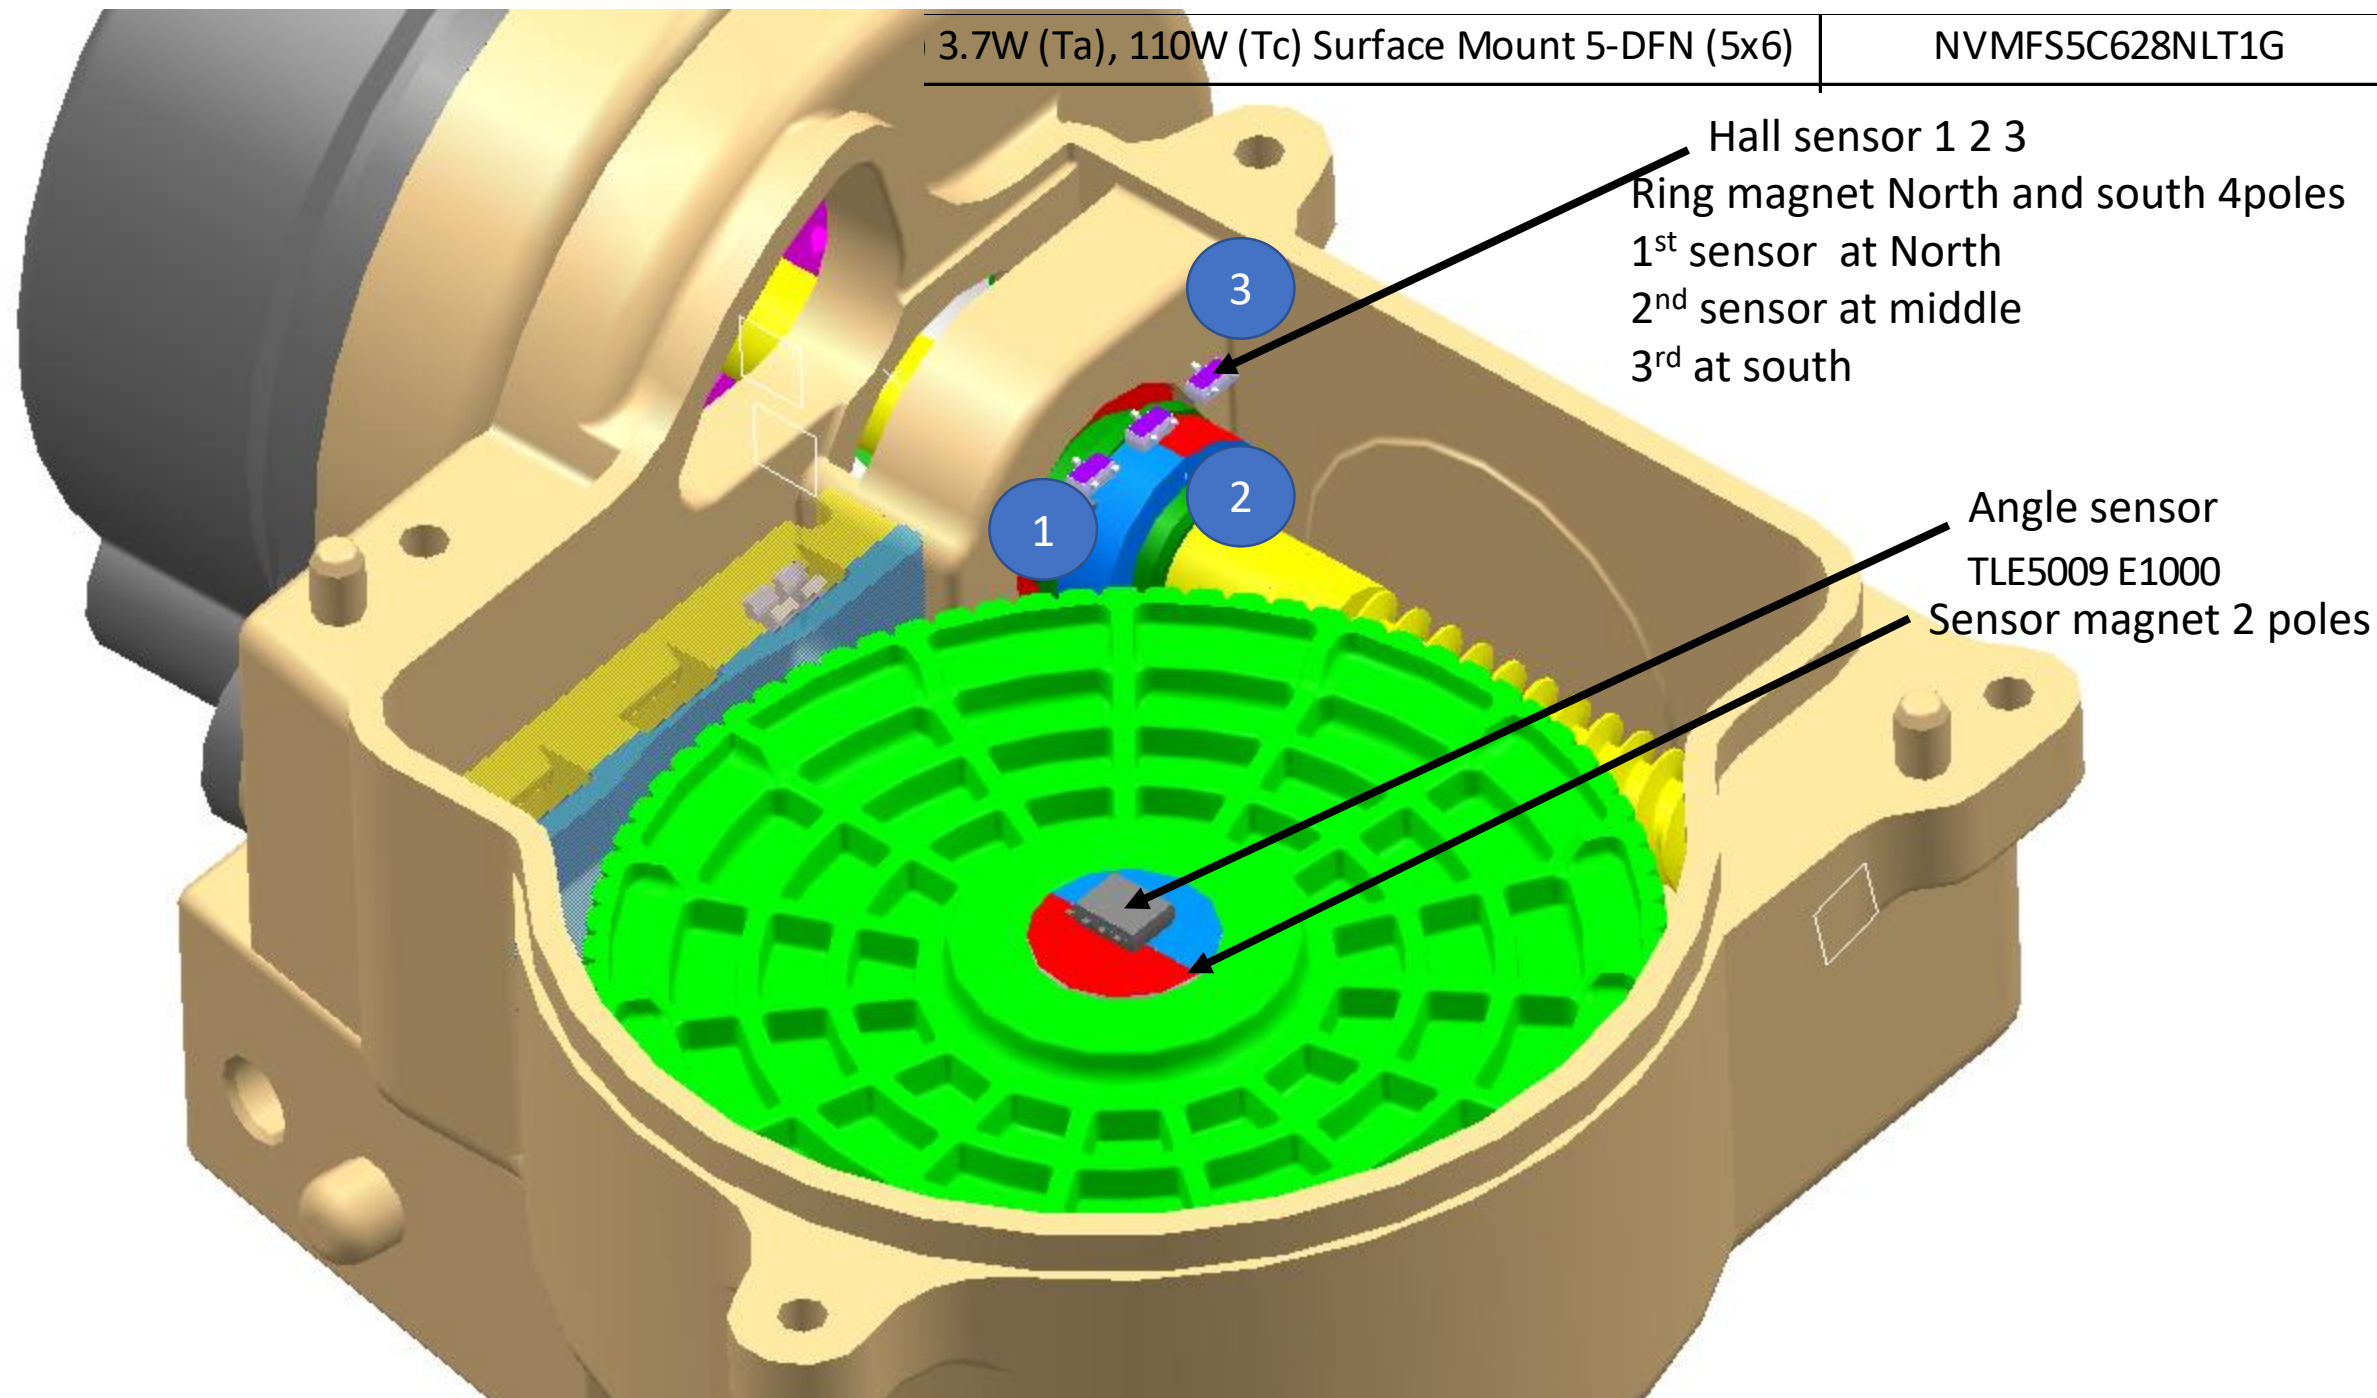

Three hall sensors

Position sensor

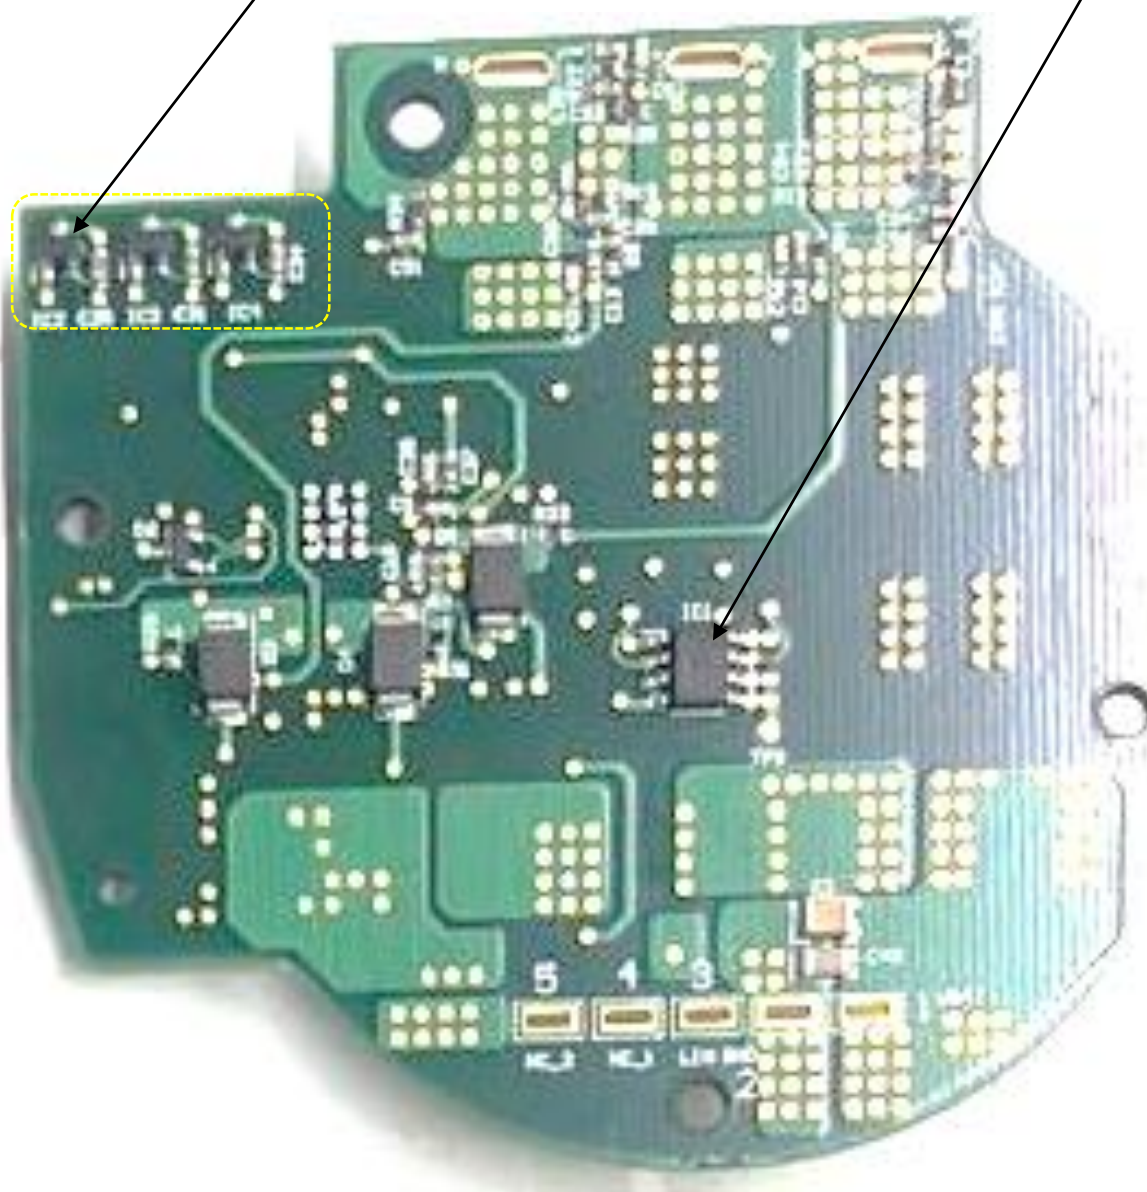

Designator	Description	Mfg_PN
D1	Rectifiers 1A,600V,50ns SMB, UF Rect, SMD	MURS160HE3_A/H
D2, D3, D4, D5	Schottky Diodes & Rectifiers 1.0A SBR 40Vrrm 28Vr 0.5Vf 0.5mA 30A	B140BQ-13-F
D6	ESD Protection Diodes / TVS Diodes	SZNUP1105LT1G
IC1	Angular Sensor	TLE5009 E1000
IC2, IC3, IC4	Board Mount Hall Effect/Magnetic Sensors HALLEFFECT IC'S, +/-4kV, 20mA,	TLE4946-2K
IC5	Motor/Motion/Ignition Controllers & Drivers EMBEDDED_POWER	TLE98792QXA40XUMA1
Q1,Q2, Q3, Q4, Q5, Q6, Q7	N-Channel 60 V 150A (Tc) 3.7W (Ta), 110W (Tc) Surface Mount 5-DFN (5x6)	NVMFS5C628NLT1G
Q8	Bipolar Transistors - BJT BC817-25/SOT23/TO-236AB	?

MOTIX™ TLE9879-2QXA40

Arm® Cortex®-M3 microcontroller with LIN and BLDC MOSFET driver for automotive applications
BF, UH, and UI step



Features

- 32-bit Arm® Cortex®-M3 core
- 128 KB flash
- 6 KB RAM
- On-chip OSC and PLL for clock generation
- MOSFET driver including charge pump for B6 bridge motor application
- 1 LIN 2.2 transceiver
- Two differential 14-bit sigma-delta ADCs
- High-speed operational amplifier for motor current sensing via shunt
- Single power supply from 5.5 V to 28 V
- Temperature range T_j = -40°C to +150°C



Requirements and Tools

- **IDE:** Keil μ Vision 5 (Arm Cortex-M3 toolchain).
- **Configuration Tool:** Infineon Config Wizard for MOTIX™ MCU.
- **Hardware:** TLE9879 Evaluation Kit (EVALKIT) or custom target board.
- **Debugger:** Segger J-Link (often integrated on-board).  Infineon Developer Com... +5

How to Build and Compile the Code

- Download the official **Motor Control Software Library** and example project (e.g., *FOC Sensorless Example*) from the [Infineon TLE9879-2QXA40 Product Page](#). 