2022 EDITION

LAFIT®
#BeTheLight

The Prillo Series

PREMIUM ARCHITECTURAL LIGHTING SOLUTIONS

ABOUT US

LAFIT LIGHTING is one of the leading manufacturers in the architectural LED lighting market, featuring a comprehensive catalogue of proven quality, high-reliability lighting fixtures capable of offering industry professionals the most innovative and alternative solutions at all times.

A full range of acclaimed architectural lighting products.

We are proud to be an example of the MADE IN INDIA branding, with a flair for innovation and a profound appreciation of the architectural project. For the last two decades, we have been unstoppable, always focussed on realizing new technical objectives and increasing product performance, with particular attention on our human capital, a team of highly trained, motivated people.

Lafit lighting always involves more resources in Research, Innovation & Design. The products studied and designed at the Research & Development centre by experts are subjected to constant and meticulous Quality.

Our products can meet the multiple needs of the architectural and design aspects and the most demanding and refined customers. The business philosophy is the same Lafit Lighting has always followed: design and delivery of the "whole system and not the individual product."

Our goal has always been to offer our customers a first-class product backed by unparalleled service focussed on solving our clients' illumination challenges.

LAFIT®
#BeTheLight

Latest Technologies

The company's manufacturing plant is located in the fast developing industrial area of Vasai & Bhiwandi. Spread across an area of 25000 sq. ft., it is thoughtfully designed to accommodate the different manufacturing processes while ensuring that every process smoothly synchronizes with the other and there is optimum utilization of time and resources.
The plant is equipped with some of the latest and finest machinery imported from USA, Japan, Italy, Taiwan and China

Advanced R&d Facility

The manufacturing facility also has a well-equipped and highly efficient R&D department. Our R&D team is relentlessly engaged in bettering our current product range through examinations and observations. Any changes in engineering which impact overall performance and productivity are promptly checked and recorded. Further, they also play an instrumental role in shaping our future portfolio through constant monitoring of market trends and customer feedback.

Highly Skilled And Qualified Staff

We have a team of highly skilled and qualified professionals with vast experience.
Our team comprises engineers for design, production, QC, and QA. Our team leaders, who head their respective departments, possess considerable in-depth knowledge of the process and its functioning. Further, we also have a team of highly skilled and experienced technical and support staff who are multi-trained to overlook operations and support with maximum fluency and accuracy.

Large Warehouse Facility

We have a well-equipped and professionally managed warehouse facility in Bhiwandi. Being located in the biggest warehousing and transport hub, it is also located at strategically convenient and comparatively close proximity to our manufacturing plant. (Our manufacturing facility & warehouse are the same.) This makes it the most viable location in terms of speed in mobility and cost effectiveness to deliver products within minimum lead-time and at exceptionally competitive prices.

Quality

Quality control at Lafit is not a one-step process
From the time of designing a product to executing it to the system, to testing of the samples, to getting them on mass production in which every unit is supervised carefully under the guidance and supervision of a qualified and experienced set of professionals.

Our dedicated Quality Department continually and closely monitors the manufacturing at every stage. There are special QC checkpoints at integral levels throughout the process to keep control and improvise on quality output. There are independent teams for IQC, INPROCESS, FQC where each product is made to undergo rigid testing Parameters.

The quality test does not end until the products are finally packed. Before packing, each product goes through a final burning test ensuring that we only deliver the best to our customers.

Contents

THE SMARTNEXT	Introduction of SmartNext	03
Down Lights Spotlights	Recessed Modular Spotlights	14
	Recessed Wall Washers	27
	Recessed Fixed Downlight / Spotlights	28
	Recessed Fixed Trimless Downlights	33
	Recessed Trimless Adjustable Spotlights	36
	Recessed Adjustable Spotlights	39
	Recessed Linear Spotlights	43
	Receesed Waterproof Spotlights	44
	Receesed Cabinet Spotlights	46
Magnetic Series	Jewellery / Display Lights	49
	Magnetic Track Lights	52
Track Lights	Track Lights	60
Surface Lights	Surface Spot Light	64
	Surface Ceiling lights	66
Pendant Lights	Office Lights	68
	Pendant Lights	69
Indoor Lights	Reading Lights	72
	Table Lamp	73
	Foot Lights	74
Strip Lights	COB Strip Lights	76

THE SMARTNEXT

THE SMARTNEXT

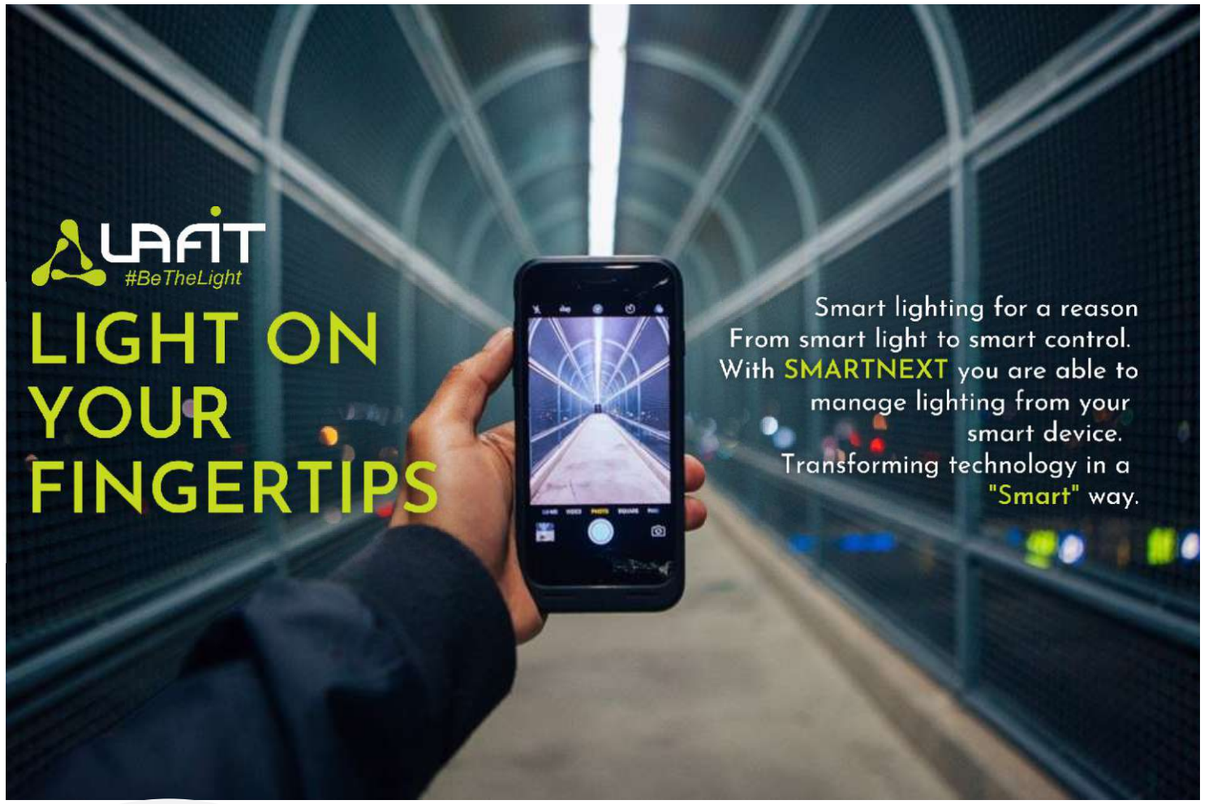

WHY SMART NEXT ?

For decades, architects, designers, and builders have looked at how to improve aspects of our home & work environment, be it through technology, or functional design. And for the past few decades we have seen an explosion of innovation in residential & workplace technology from the personal computer, cell phone, Internet, and lighting. These advances have helped people be more efficient. But what if we could add a new axis of innovation to the environment? What if in addition to improving the tools in our spaces, we could also improve the productivity of people and at the same time increase efficiency?

Introducing **SMARTNEXT** which functions in sync with the Circadian lighting system. Circadian lighting is the concept that electric light can be used to support human health by minimizing the effect of electric light on the Human circadian rhythm.

Smart Lighting Functionality
The Lafit Lighting control solution provides for all the control that are excected from a full featured professional lighting control solution.

There are 4 primary nutrients that the human body needs :

1. Food
2. Water
3. Oxygen
4. Light

Did you know that your human body is designed to follow a systemic rhythm where every function from the beating of the heart to the breathing of the lungs was meant to function in sync with the environment.

This system or rhythm, commonly referred to as the Circadian rhythm is based on the light perception that occurs in our system.
With the invention of artificial lights in the 19th century, soon our system started perceiving night as day and that in turn played a massive role in disrupting our health.

THE IMPACT OF HUMAN CENTRIC LIGHTING :

- INCREASED ALERTNESS IN THE MORNING.
- PRODUCTIVITY AND CONCENTRATION IMPROVEMENTS.
- IMPROVED MOODS.
- REDUCED HYPERACTIVITY.
- REDUCTION IN ERRORS AND ACCIDENTS.
- FASTER COGNITIVE PROCESSING.
- IMPROVED SLEEP.
- SAVES MONEY AND THE ENVIRONMENT.
- BETTER VISUAL ACTIVITY.

THE SMARTNEXT

HUMAN CENTRIC LIGHTING

Also known as circadian rhythm lighting, signals the brain through the photoreceptors in the eye and gives the impression of the shifting colors and intensities of the rising and setting sun.
What kind of light does an occupant need to perform at optimum levels on an hour to hour basis?
Task tuning is a feature of advanced lighting controls, and human-centric lighting takes this to the next level.
Advanced lighting controls using tunable LED lighting that includes color is now driving human physiological responses in a number of important ways.
Exposure to bright, blue-rich white light during the midday and warmer colors during the early morning and late afternoon/ early evening can drive energy and alertness or a calming sleep inducing effect. Disrupting circadian rhythms can contribute to poor night time sleep, increased daytime napping, and greater risk of depression, obesity, diabetes, and seasonal affective disorder.
Corporate office buildings, hospitals, and even schools are beginning to see the productivity and other benefits of incorporating human-centric lighting into their environments.

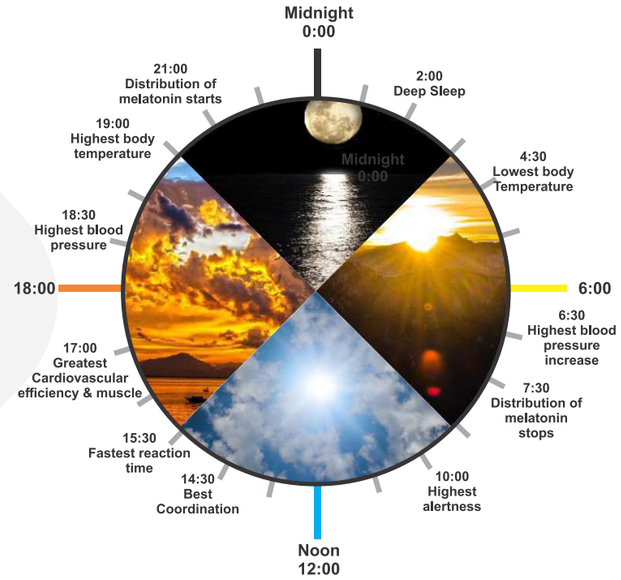

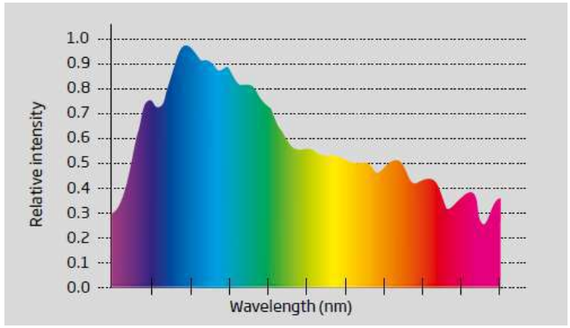

Morning light spectrum

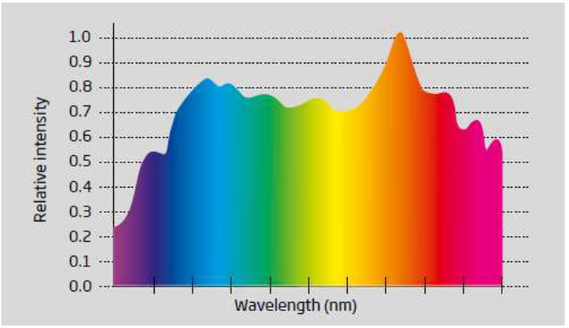

Evening light spectrum

REACTIONS OF THE BIORHYTHM TO DAYLIGHT
For people with normal working & rest periods

With the use of sensor technology, wireless communications, adaptive controls, and software applications, human centric smart lighting systems are environmentally aware and intuitively controllable. Integration with third-party building automation systems and web-based IoT services brings interoperability to HCL systems for vastly improved lighting control, user interaction, energy efficiency as well as automated lighting calibration with the 24-hour biological cycle.

CIRCADIAN

It's a technology that best imitates sunlight.
Thanks to the use of modern LEDs and the proper configuration of blue light emission, it affects the stimulation or suppression of melatonin release. Therefore, it either gives people energy or helps them wind down and fall asleep, supporting the natural human circadian rhythm.

ENERGY IN THE MORNING
4000K white + blue-enriched

HAPPINESS AT MIDDAY
4000K - 3000K white

RELAXATION IN THE EVENING
3000K - 2700K white

THE SMARTNEXT

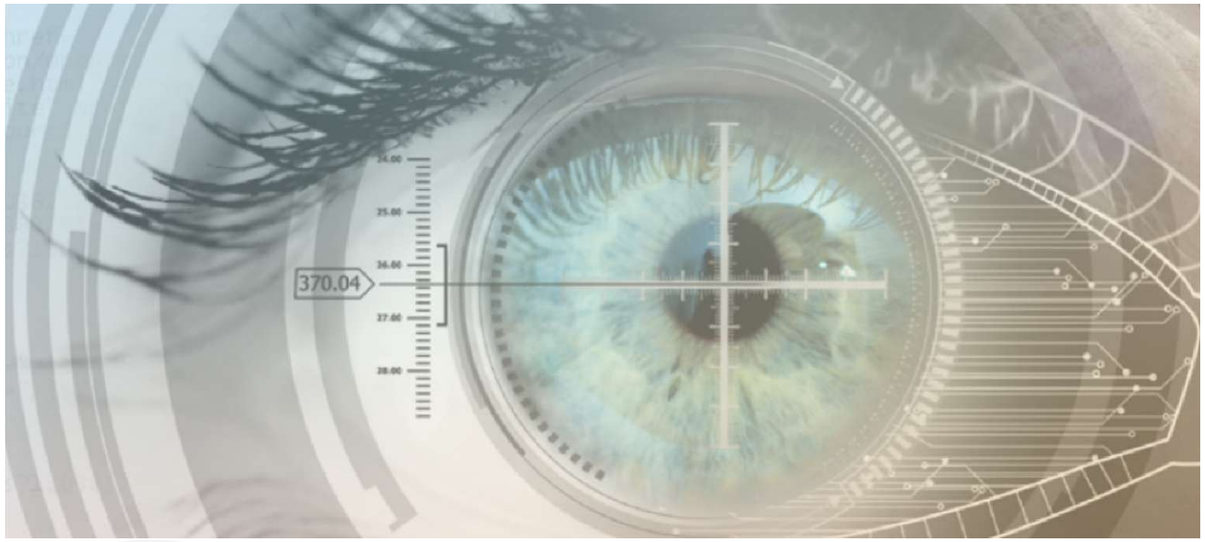

DAYLIGHT- A NATURAL REGULATOR

Human activity functions according to a rhythm determined by nature. Until the invention of artificial lighting, it was the sun that decided about people's daily activities by waking them up at sunrise and indicating that it was time to rest at sunset.

Evolution has forced a rhythm upon us that divides the day into two parts. We spend 16 hours being active, and the remaining 8 hours resting. This daily activity pattern is determined not only by practicality. Scientific studies prove that a dependency of a chemical nature also exists. Light not only helps us to discover the images coming from the world that surrounds us. It regulates sleep, participates in the absorption and production of vitamins, and takes care of proper hormonal management. What's important, daylight directly affects people's moods and well-being.

In 2001, it was discovered that the eye has three types of photoreceptors, and not two, as had been previously thought: cones and rods. This discovery revolutionized the perception of the significance of the light spectrum and how it affects humans. As it turned out, this third receptor (the ipRGC photoreceptor) is particularly sensitive to a narrow range of blue light, which is most abundant in natural sunlight in the morning and decreases during the day.

- When the light enters the eye.
- Through the hypothalamus it regulates the circadian rhythm with the help of chemical messengers that include cortisol, serotonin & melatonin.
- A regulated circadian rhythm has positive psychological & physiological impacts on you.

HUMAN-CENTRIC LIGHTING IS THE NEXT STEP IN LED DESIGN AND CONTROL

LED-based human-centric lighting is controllable and tunable across a spectrum of correlated color temperatures (CCTs) to evoke particular human biological responses and behavior in well-designed indoor environments.

HUMAN-CENTRIC LIGHTING AT WORK.
Using tunable LEDs in this manner is known as human-centric lighting (HCL), and it offers many potential advantages in offices and workspaces. Research is underway into the potential emotional and biological outcomes of lighting that mimics the changes in color temperatures found in natural daylight.

THE FUTURE IS SMART NEXT
The reality is that all light is not created equal. Just as with other products or technologies, there are varying degrees of quality. People will begin to encounter HCL more, and they will soon come to expect it in the spaces where they spend prolonged amounts of time. That means new construction will soon demand this option in the design and specification stage. Also, retrofit opportunities must be available to existing buildings.

The functionalities of this technology are more than merrier. The next page will help you to understand what all it can offer to make your life even more productive and easy at the same time.

THE SMARTNEXT

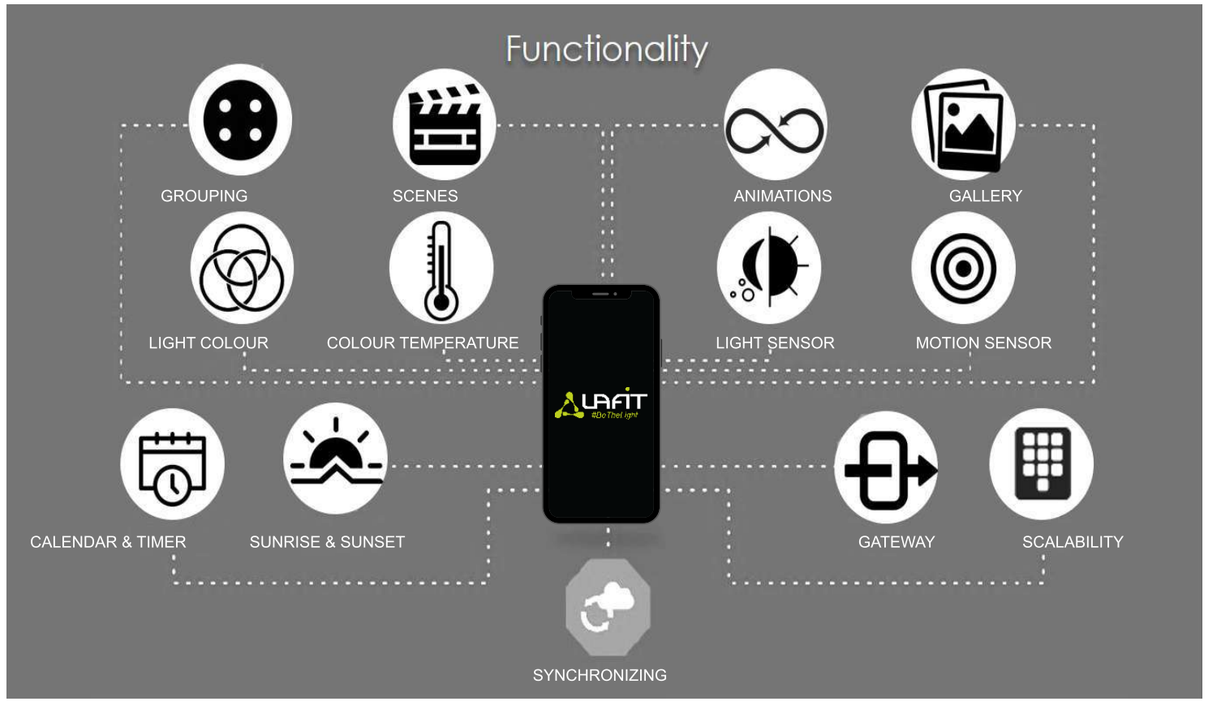



Grouping
Grouping luminaires in the Lafit app is very easy. Grouping works with the same gestures as grouping apps in your smart device. After grouping, all the luminaires in the group can be controlled all together or the group can be opened for individual control.



Animations
Animations are dynamic scenes, where it is possible for the lighting to fade from one scene to another scene. Animations can be recalled to cycle through different lighting situations once or they can be set on repeat. The duration of each scene and the fade times between scenes can be set.

Scenes
Different lighting situations for different occasions can be created. It is possible to control multiple luminaires with one tap to create the perfect ambience for different occasions and needs. One luminaire can be used in several scenes.

Circadian Control
The lighting control solution shall have the capability of controlling the colour temperature of tuneable white luminaires based on day time as well as the ability to automatically change the colour temperature management for regular scenes by using a response graph that spans the hours of day on horizontal axis and colour temperature on vertical axis.
Any user shall have access to the circadian control curve from the App and to be able to modify the curve, by easy App gestures, according to individual needs.

THE SMARTNEXT

Light colour
Lafit offers a comprehensive color controlling possibility. A luminaire manufacturer can define the limits of the Lafit Ready luminaire's color range beforehand. A user can change the color in a simple manner from the app and also save his/her favorite colors in a color palette.

Calendar & timer
With the calendar and timer functionality scenes and animations can be turned on and off based on a convenient time, date or certain weekdays to fit users' needs, seasons and different activities. All the Lafit units keeps track of time.

Sunrise & Sunset
Lafit units are able to calculate the local sunrise and sunset times, provided that the network's time zone and location are set. When the location is requested the application is temporarily using GPS to retrieve the current location of the mobile device.

Colour temperature
Lafit offers a comprehensive colour temperature control. A luminiare manufacturer can define the limits of the Lafit ready Tunable White luminiare beforehand so it appears with the correct levels in the Lafit App. A user can change in a simple manner the colour temperature for the luminaire just by sliding the finger on top of a luminaire icon.

Gallery
The lighting control solution shall include a functionality to control lighting directly from a picture in the App. The functionality shall be flexible and permit the user to choose any kind of picture like a real photograph of the space, a floor plan or a render. It shall be possible to control lighting from the chosen picture with easy App gestures. Several pictures can be added.

Remote Access
A network can have a single iOS/Android device working as a gateway. Other devices having access privileges to the same network can connect via the cloud to the network when not on the same physical location of the network. One iOS device can be a gateway for 4 networks and one Android device can be the gateway for 1-4 networks, depending on the Android device. The amounts of networks are iOS/Android restrictions and not depending on the lighting control solution technology.

Apple watch
The lighting control solution shall enable lighting control via Apple Watches. From an Apple Watch, luminaires can be turned on and turned off , a scene or an animation can be recalled and dimming can be done by rotating the digital crown. In the watch window 'all lamps' and 3 first scenes can be seen.

THE SMARTNEXT

No Gateway
Bluetooth Low Energy is already implemented in smartphones, tablets and smart watches. This means that the communication from a smart device to the lighting control solution shall not require any kind of gateway or dongle.

App
The lighting control solution shall o ffer a big variety of possibilities for a user to interact with the lighting depending on the user's individual requirements. An App for smartphones, tablets and smartwatches is the most elaborated user interface. It shall be possible to download the App, with all the functionality specified for the project, for both iOS and Android devices, from relevant App stores.

Network Sharing
As a consideration of the system setup, the network sharing is a decision that is to be made at the beginning of the process, to ensure a straightforward commissioning phase and the best possible network security.
The network shall have 4 different sharing options, that can be chosen and modified directly from the App.

Network
The lighting control solution is based on a network structure. All luminaires and lighting control devices are paired to networks. 250 units can be paired to one network. The amount of networks does not have to be considered.

Security
The network (communication from mobile devices to the lighting control units and from the units to the cloud and server) shall be an own, closed network. Local building networks shall not be accessed. The cloud shall require Log In and Password, that allows an access token to a local "Bluetooth network".

SIMULATION OF DAYLIGHT

The characteristics of the Human Centric Lighting illumination consider more than just vision. The focus is on the person. Human Centric Lighting stimulates the well-being and supports stable health of the person.

DELIVERING NEXT
THE SMARTNEXT

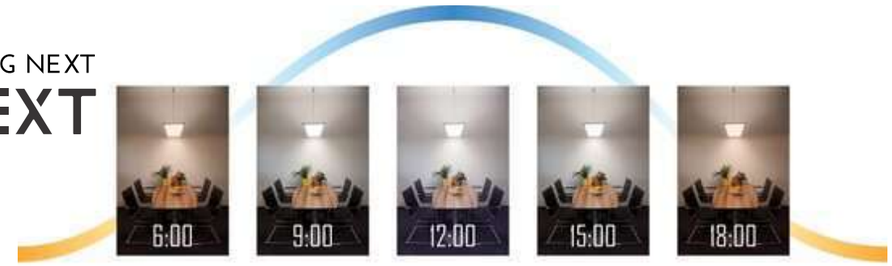

THE SOLUTION FOR HUMAN CENTRIC LIGHTING

THE
SMARTNEXT

KEY FACTORS

- Bluetooth Low Energy, wireless.
- Any smartphone or tablet in the world support BLE technology.
- Mesh peer-to-peer communication.
- Mesh network range : 30 m range indoor, 50 m range outdoor. (Without obstacle)
- 250 smart modules in one network with an end number of networks can be created at one site.
- Each Lafit Bluetooth unit works as amplifier/repeater.
- No servers, no software licenses, no IT structure needed.
- Firmware updates over the air.
- 100% Safe & Secure for your mobile data.
- Secure communication: AES-128, (+ECDH and ECDSA),cryptography in the BLE level and Secure https communication between smartphone and the cloud.
- No VPN/gateway needed for remote control.
- Easy, user friendly app-interface.
- Five levels of security/users.
- Compatible with standards: DALI,
- 0/10V Analog, 1/10V Analog and trailing edge.
- No single point of failure, no need of HUB/Router's.
- Self repairing: each Lafit Bluetooth module stores a backup of all Lafit Bluetooth module in the network.
- Restore/auto backup of the failure units.
- Unlimited number of networks.
- Cloud supported. No need for local backup.
- Data harvesting and Cloud/API interface for IoT.
- Our Brillo range products, are 100% compatible with app & all products are configured and used with the Casambi App, available for both iOS & Android.

Project: Bungalow Bhuj Kutch

High-end Residence project
by AT Architects

Pehnawa High-end showroom
(Aurangabad)

Project: GANGA NIWAS
Bungalow (Akola)
Architect : THE LINE ARCHITECTS

Project: Roman Group Hotel
(Madhya Pradesh)

High-end Residence project

High-end Residence project
by abnn haus
Architect : Harprit Sing

LAFIT

NEW ARRIVALS

MERAKI

Enhance the beauty of your home or any living space with Lafit’s new range of track spotlights. Create beautiful designs with linear and circular magnetic tracks fitted with designer spotlights.

The track system is adaptable, versatile, and flexible. The Magnetic track lights are perfect for the traditional style, showcasing the premium quality materials and highlight the objects the way you want to. The rich golden colour of the fixture gives a fresh and premium look to the interior. Create your own style and pattern and make your interior more appealing.

MERAKI

LFTL1123A

MAGNETIC PENDANT TRACK LIGHTS

	Wattage (W)	10W
LUMEN OUTPUT	N 4000K	975
	W 3000K	940
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24V DC
DIMENSIONS (in mm)	Diameter X	46
	Height H	102
	Track Size L	1000 /1500 / 2000
	W	12
	H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES



COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC



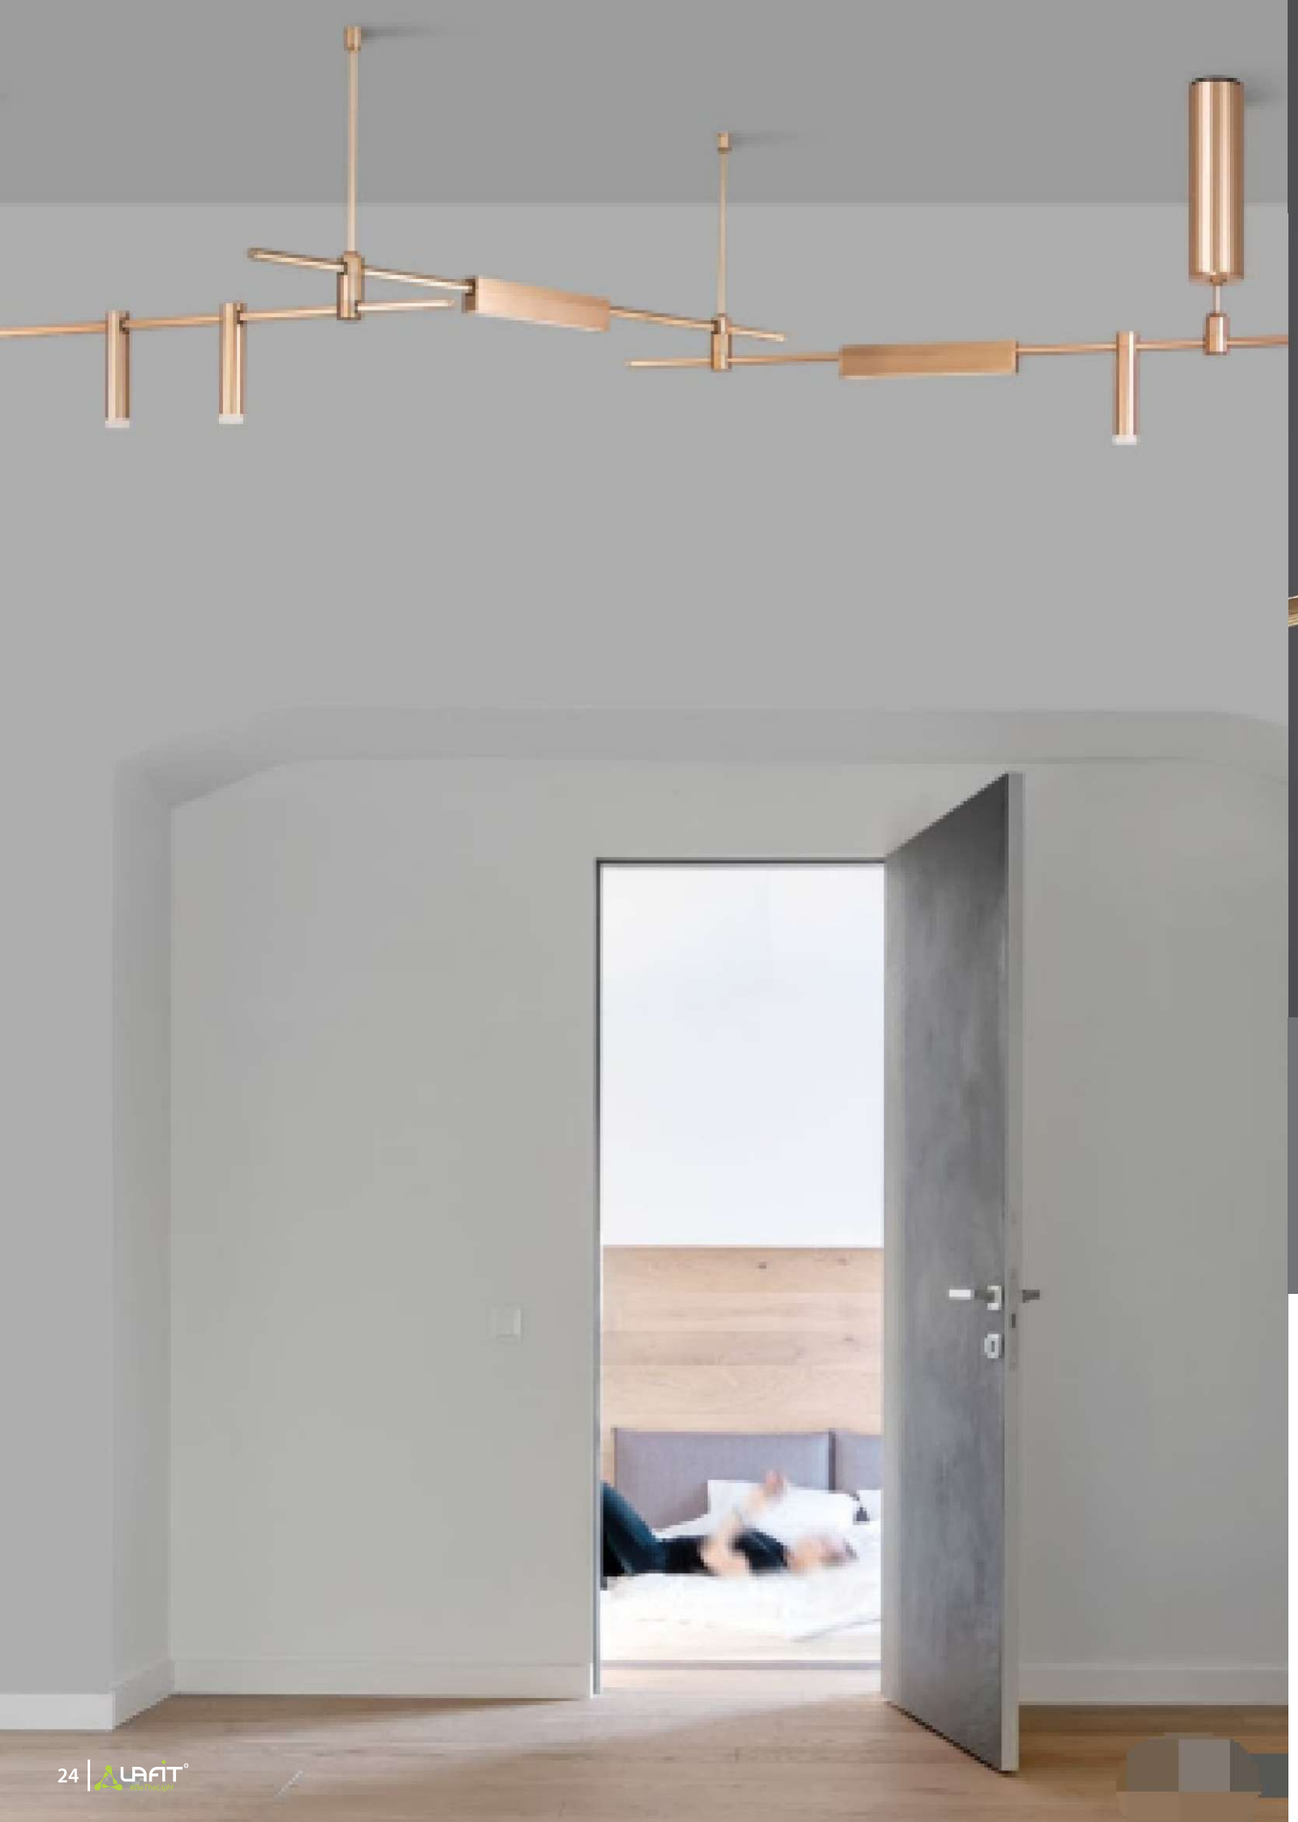

MERAKI

LFTL1123B

MAGNETIC PENDANT TRACK LIGHTS

	Wattage (W)	5W
LUMEN OUTPUT	N 4000K	595
	W 3000K	535
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24V DC
DIMENSIONS (in mm)	Diameter X	30
	Height H	155
	Track Size L	1000 /1500 / 2000
	W	12
	H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	5W	80°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



MERAKI

LFTL1123C

MAGNETIC PENDANT TRACK LIGHTS

	Wattage (W)		5W
LUMEN OUTPUT	N	4000K	595
	W	3000K	535
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	100
	Height	H	140
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	5W	110°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



MERAKI

LFTL1123D

MAGNETIC PENDANT TRACK LIGHTS

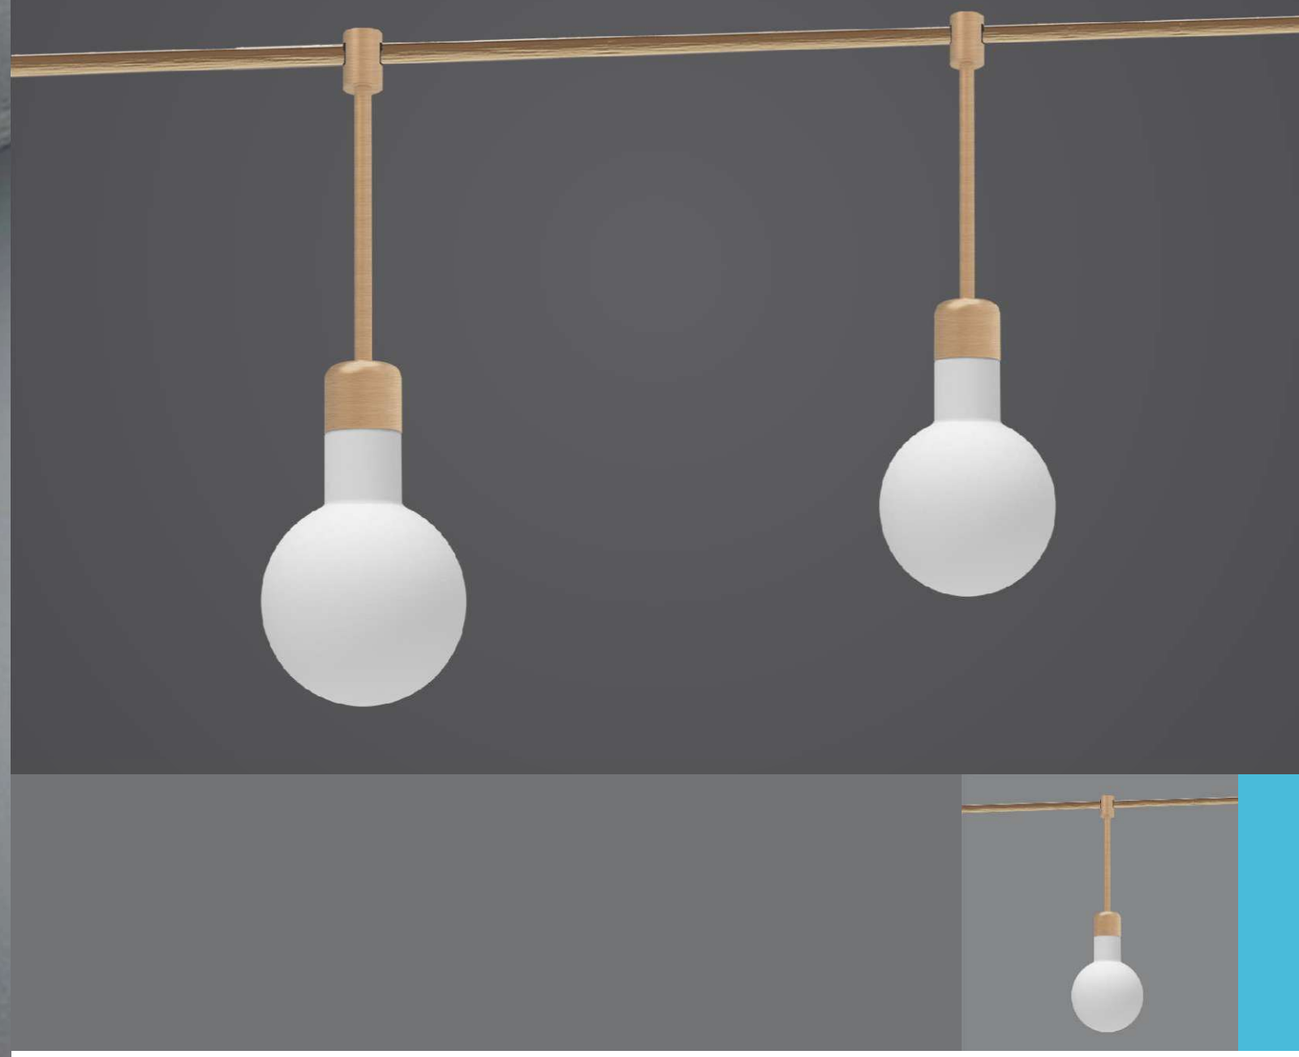

	Wattage (W)		5W
LUMEN OUTPUT	N	4000K	595
	W	3000K	535
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	100
	Height	H	Adjustable
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES

5W

110°

COLOUR OPTIONS	
Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



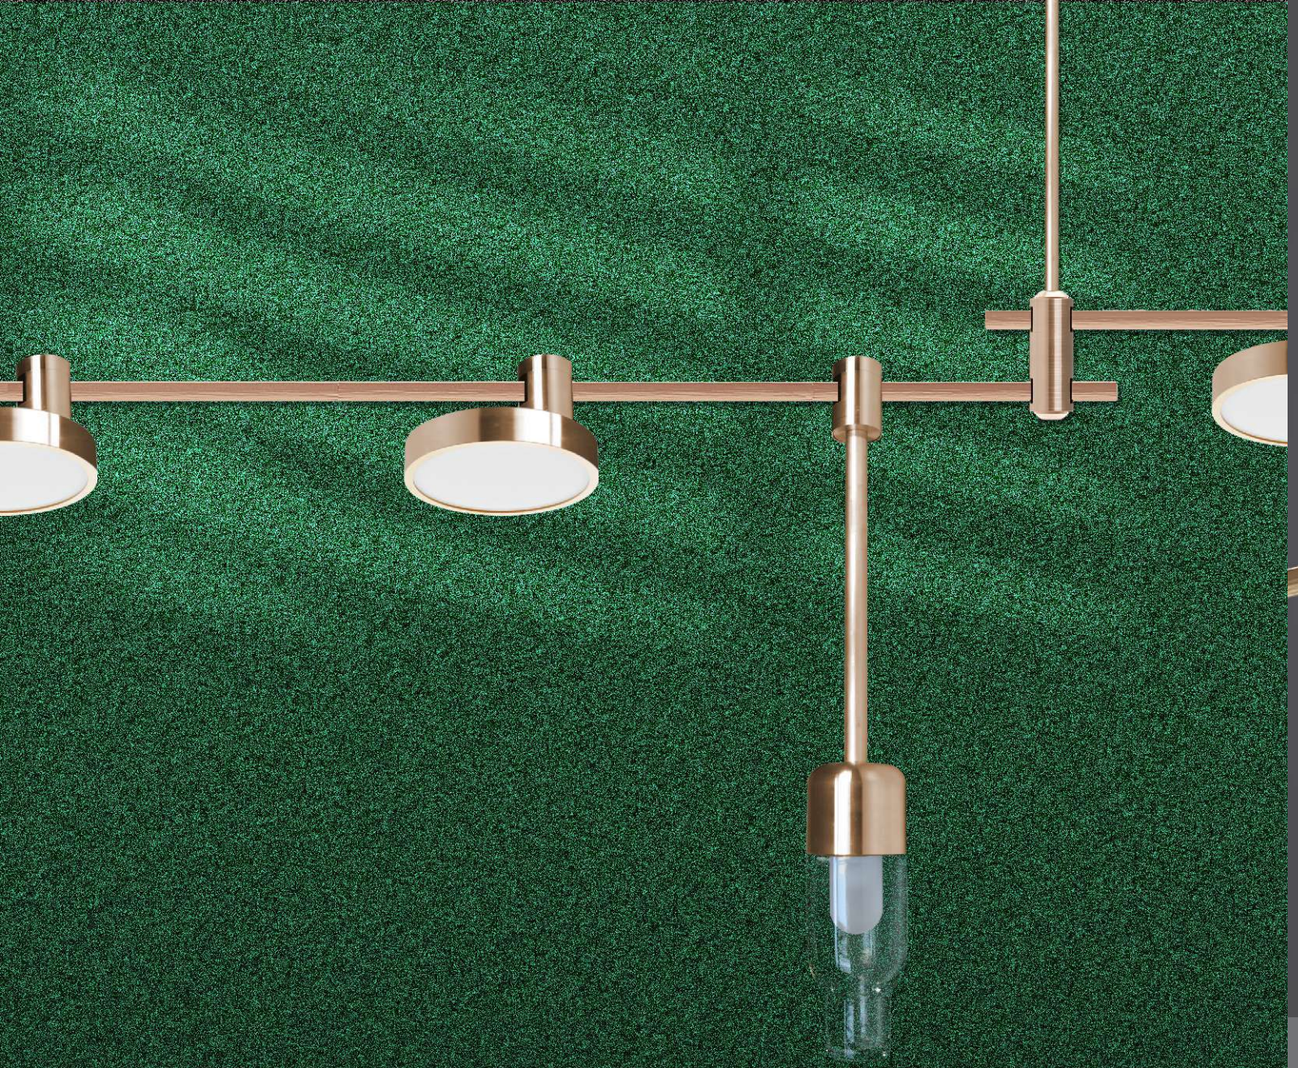

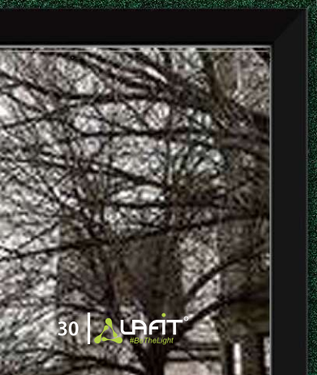

MERAKI

LFTL1123E

MAGNETIC PENDANT TRACK LIGHTS

	Wattage (W)	10W
LUMEN OUTPUT	N 4000K	1185
	W 3000K	1120
SYSTEM EFFICIENCY	No. of LEDs	SMD
	THD (%)	-
	Driver Rating	24V DC
DIMENSIONS (in mm)	Diameter X	101
	Height H	18
	Track Size L	1000 /1500 / 2000
	W	12
	H	10.6

SYSTEM SPEC	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	10W	
	120°	
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



MERAKI

LFTL1123F

MAGNETIC PENDANT TRACK LIGHTS



Wattage (W)			10W
LUMEN OUTPUT	N	4000K	1185
	W	3000K	1120
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Size	L	319
		W	55
	Height	H	34
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES



COLOUR OPTIONS: Outer-Body — Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)





MARBUL PLUS

Magnetic track lights have created a revolution in lighting design. Lafit Lighting brings you the minimal and beautifully designed, low voltage multipurpose system with various solutions including spotlights, pendants, and linear lighting. It can be installed both vertically and horizontally and has recessed, surface, and hanging versions. Low voltage offers designers plenty of freedom, as it can illuminate versatile spaces. By adjusting and moving the light points, they can be adopted to changing lighting requirements. The variable and flexible lighting design smartly makes use of your space and creates an exhilarating experience.

MARBUL PLUS

LFTL1124 C

MEGNETIC TRACK LIGHTS

Honeycomb

Beam Soft

DIMMABLE

ANTI-GLARE

TUNEABLE

TILTABLE 90°

48 V DC

Alexa

Surface



Recessed



Hanging

	Wattage (W)		5W	12W	20W
LUMEN OUTPUT	N	4000K	550	1320	2200
	W	3000K	525	1260	2100
SYSTEM EFFICIENCY	No. of LEDs		1	1	1
	Driver Rating		48V DC	48V DC	48V DC
	UGR Rating		>14	>14	>14
DIMENSIONS (in mm)	Diameter	Ø	40	60	80
	Height	H	90	121	151
	Adapter	L	185	185	185
	Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000		
		W	67		
		H	54		
	Cutout	Ø	30		
	Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000		
		W	27 (23mm Inner width)		
		H	54		

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)
BEAM ANGLES	5W,12W,20W	36°
COLOUR OPTIONS	Black	

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC





Track Trimless

MARBUL PLUS

LFTL1124 D

MEGNETIC TRACK LIGHTS

Surface



Recessed



Hanging

	Wattage (W)		12W
LUMEN OUTPUT	N	4000K	1200
	W	3000K	1080
SYSTEM EFFICIENCY	No. of LEDs		-
	Driver Rating		48V DC
	UGR Rating		>25
DIMENSIONS (in mm)	Diameter	Ø	113
	Height	H	35
	Adapter	L	185

Recessed (Trimless)

Track Size	L	500 /1000 / 2000
	W	67
	H	54
Cutout	Ø	30

Surface mounted / Pendant / Recessed

Track Size	L	500 /1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Edison
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black





Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 E

MEGNETIC TRACK LIGHTS

DIMMABLE · ANTI - GLARE · TUNEABLE · 48 V DC · Alexa

Surface



Recessed



Hanging

			6W	12W	18W
Wattage (W)					
LUMEN OUTPUT	N	4000K	660	1320	1980
	W	3000K	630	1260	1890
SYSTEM EFFICIENCY	No. of LEDs		6	12	18
	Driver Rating		48V DC	48V DC	48V DC
	UGR Rating		>9	>9	>9
DIMENSIONS (in mm)	Size	L	119	233	348
		W	22	22	22
	Height	H	43	43	43
Recessed (Trimless)					
	Track Size	L	500 /1000 / 2000		
		W	67		
		H	54		
	Cutout	Ø	30		
Surface mounted / Pendant / Recessed					
	Track Size	L	500 /1000 / 2000		
		W	27 (23mm Inner width)		
		H	54		

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)
BEAM ANGLES	6W,12W,18W	30°
COLOUR OPTIONS	Black	



Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 F

MEGNETIC TRACK LIGHTS

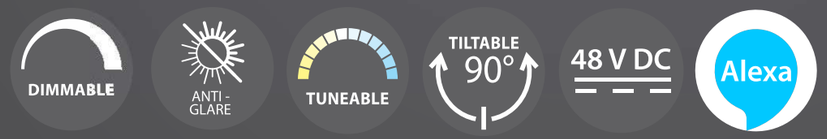

Surface



Recessed



Hanging

			6W	12W
Wattage (W)				
LUMEN OUTPUT	N	4000K	660	1320
	W	3000K	630	1260
SYSTEM EFFICIENCY	No. of LEDs		6	12
	Driver Rating		48V DC	48V DC
	UGR Rating		>9	>9
DIMENSIONS (in mm)	Size	L	119	233
		W	22	22
	Height	H	55	55

Recessed (Trimless)

Track Size	L	500 /1000 / 2000	
	W	67	
	H	54	
Cutout	Ø	30	

Surface mounted / Pendant / Recessed

Track Size	L	500 /1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)
BEAM ANGLES	6W,12W,18W	30°
COLOUR OPTIONS	Black	

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

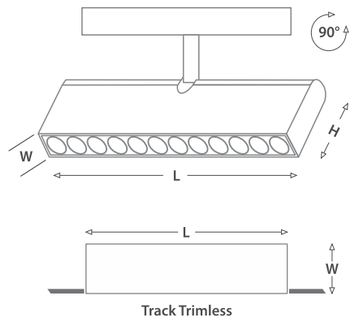

Track Trimless

MARBUL PLUS

LFTL1124 G

MEGNETIC TRACK LIGHTS

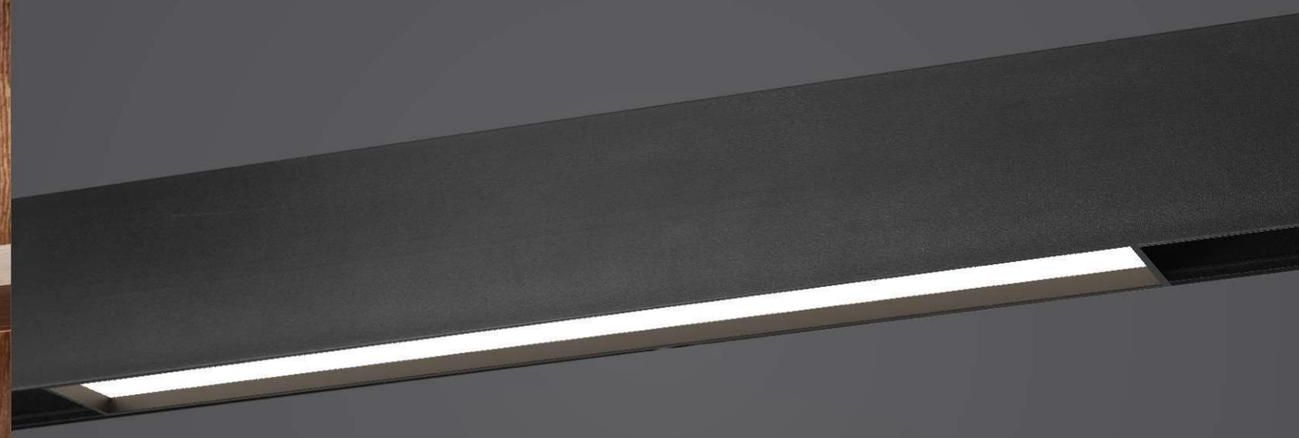

DIMMABLE · ANTI - GLARE · TUNEABLE · 48 V DC · Alexa

Surface



Recessed



Hanging

	Wattage (W)		7W	15W	22W
LUMEN OUTPUT	N	4000K	700	1500	2200
	W	3000K	630	1350	2090
SYSTEM EFFICIENCY	Driver Rating		48V DC	48V DC	48V DC
	UGR Rating		>25	>25	>25
DIMENSIONS (in mm)	Size	L	233	463	693
		W	22	22	22
	Height	H	43	43	43

Recessed (Trimless)

Track Size	L	500 /1000 / 2000
	W	67
	H	54
Cutout	Ø	30

Surface mounted / Pendant / Recessed

Track Size	L	500 /1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Edison
	Driver Brand	Meanwell (External)

BEAM ANGLES: 7W,15W,22W — 100°

COLOUR OPTIONS: Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC



Track Trimless

MARBUL PLUS

LFTL1124 H

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		5W	12W
LUMEN OUTPUT	N	4000K	550	1320
	W	3000K	525	1260
SYSTEM EFFICIENCY	No. of LEDs		-	-
	Driver Rating		48V DC	48V DC
	UGR Rating		>14	>14
DIMENSIONS (in mm)	Diameter	Ø	40	50
	Height	H	300	300
	Adapter	L	185	185
	Hanging wire	L	1.5m	1.5m
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

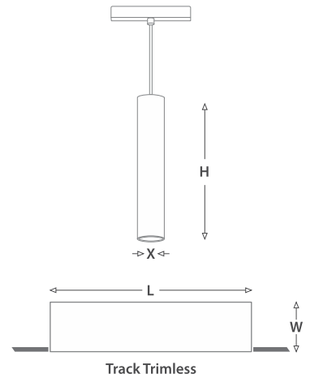

Track Trimless

MARBUL PLUS

LFTL1124 I

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		5W
LUMEN OUTPUT	N	4000K	550
	W	3000K	525
SYSTEM EFFICIENCY	No. of LEDs		-
	Driver Rating		48V DC
	UGR Rating		>9
DIMENSIONS (in mm)	Diameter	Ø	79
	Height	H	120
	Adapter	L	185
	Hanging wire	L	1.5m
Recessed (Trimless)			
	Track Size	L	500 /1000 / 2000
		W	67
		H	54
	Cutout	Ø	30
Surface mounted / Pendant / Recessed			
	Track Size	L	500 /1000 / 2000
		W	27 (23mm Inner width)
		H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES

COLOUR OPTIONS: Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC



Track Trimless

MARBUL PLUS

LFTL1124 J

MEGNETIC TRACK LIGHTS

Surface 5W

10W


Recessed


Hanging

			5W	10W
	Wattage (W)			
LUMEN OUTPUT	N	4000K	550	1100
	W	3000K	525	1050
SYSTEM EFFICIENCY	No. of LEDs		-	-
	Driver Rating		48V DC	48V DC
	UGR Rating		>9	>9
DIMENSIONS (in mm)	Diameter	Ø	50	50
	Height	H	73	73
	Adapter	L	185	185
	Recessed (Trimless)			
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
	Surface mounted / Pendant / Recessed			
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC



Track Trimless

MARBUL PLUS

LFTL1124 K

MEGNETIC TRACK LIGHTS

Surface 3W

6W


Recessed


Hanging

	Wattage (W)		6W	3W
LUMEN OUTPUT	N	4000K	600	300
	W	3000K	570	285
SYSTEM EFFICIENCY	No. of LEDs		-	-
	Driver Rating		48V DC	48V DC
	UGR Rating		>25	>25
DIMENSIONS (in mm)	Diameter	Ø	60	60
	Height	H	108	108
	Adapter	L	185	185
	Recessed (Trimless)			
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
	Surface mounted / Pendant / Recessed			
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black | White

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC





Track Trimless

MARBUL PLUS

LFTL1124 L

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		8W	
LUMEN OUTPUT	N	4000K	800	
	W	3000K	760	
SYSTEM EFFICIENCY	No. of LEDs		-	
	Driver Rating		48V DC	
	UGR Rating		>9	>9
DIMENSIONS (in mm)	Diameter	Ø	100	100
	Height	H	97	97
	Adapter	L	185	185
	Hanging wire	L	1.5m	1.5m
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS: Black | Champagne Gold

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC



Track Trimless

MARBUL PLUS

LFTL1124 M

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		8W
LUMEN OUTPUT	N	4000K	800
	W	3000K	760
SYSTEM EFFICIENCY	No. of LEDs		-
	Driver Rating		48V DC
	UGR Rating		>11
DIMENSIONS (in mm)	Diameter	Ø	85
	Height	H	76
	Adapter	L	115
	Hanging wire	L	1.5m

Recessed (Trimless)

Track Size	L	500 /1000 / 2000
	W	67
	H	54
Cutout	Ø	30

Surface mounted / Pendant / Recessed

Track Size	L	500 /1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

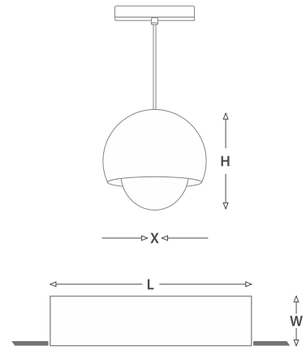

Track Trimless

ANGEL PLUS

A collection of minimalist and elegant design lighting products for all your lighting needs. Angel Plus creates a graceful and exquisite lighting atmosphere that is both unique and expressive, particularly when illuminated, the interior colours contrast with the exterior finish to reveal all their beauty. Also available in Trimless design, its sleek, invisible and merges with the ceiling making the room appear bigger and spacious. Angel Plus range is suitable for planning solutions for high-end residences, and retail outlets, lobbies, hotels, museums, and wherever representative, stylish premium lighting solutions technology is required.

ANGEL PLUS

LFSL1122A

LINEAR SPOT LIGHT

ANTI-GLARE

DIMMABLE

TILTABLE

Accessories

Honeycomb

			5W	10W	15W	20W
	Wattage (W)					
LUMEN OUTPUT	N	4000K	460	920	1380	1840
	W	3000K	450	900	1350	1800
SYSTEM EFFICIENCY	No. of LEDs		2	4	6	9
	THD (%)		-	60	60	≤15
	Power Factor		0.5	0.85	0.85	0.95
	Driver Rating		2.8-9V 700mA	7-12V 700mA	12-21V 700mA	20-40V 700mA
	URG Rating		<16	<16	<16	<16
	Surge		1.5kV	2.5kV	3kV	2kV
DIMENSIONS (in mm)	Size	L	90	150	210	300
		W	67	67	67	67
	Height	H	50	50	50	50
	Cutout	L	83	143	203	293
		W	57	57	57	57

SYSTEM SPECS

Housing	Aluminum
LED Make	Osram
Driver Brand	Allooking (5W), Fulham (10W,15W) BAG (20W)
Dimming	Triac / Analog(10W,15W,20W) / Dali

BEAM ANGLES

5W, 10W, 15W, 20W

15°, 24°, 38°

COLOUR OPTIONS

Housing	White
Reflector	Black

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz



ANGEL PLUS

LFSL1122B

LINEAR SPOT LIGHT
TRIMLESS

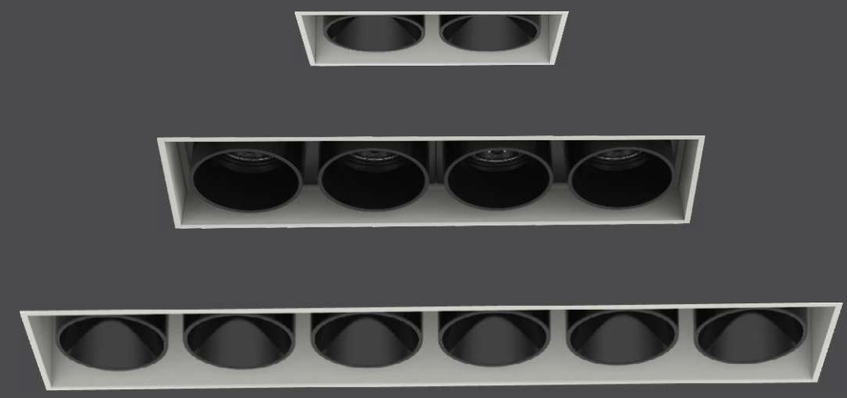

ANTI - GLARE

DIMMABLE

Accessories

Honeycomb

	Wattage (W)		5W	10W	15W
LUMEN OUTPUT	N	4000K	460	920	1380
	W	3000K	450	900	1350
SYSTEM EFFICIENCY	No. of LEDs		2	4	6
	THD (%)		-	60	60
	Power Factor		0.5	0.85	0.85
	Driver Rating		2.8-9V 700mA	7-12V 700mA	12-21V 700mA
	URG Rating		<16	<16	<16
	Surge		1.5kV	2.5kV	3kV
DIMENSIONS (in mm)	Size	L	68	128	187
		W	81	81	81
	Height	H	53	53	53
	Cutout	L	70	130	190
		W	50	50	50

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Allooking (5W), Fulham (10W,15W)
	Dimming	Triac / Analog(10W,15W) / Dali

BEAM ANGLES

5W, 10W, 15W

15°, 24°, 38°

COLOUR OPTIONS	Housing	White
	Reflector	Black

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz



ANGEL PLUS

LFTL1122A,B

TRACK LIGHT

ANTI - GLARE

TILTABLE 90°

Accessories

Honeycomb

LFTL1122B-12W

LFTL1122A-24W

LFSS1122B-12W

LFCL1122A-12W

		12W	24W
	Wattage (W)		
LUMEN OUTPUT	N 4000K	1200	2400
	W 3000K	1140	2280
SYSTEM EFFICIENCY	No. of LEDs	2	4
	THD (%)	10	10
	Power Factor	0.9	0.9
	Driver Rating	30V 300mA	30V 600mA
	URG Rating	<16	<16
	Surge	2.5kV	2.5kV
DIMENSIONS (in mm)	Diameter X	90	105
	Height H	72	72

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	LAFIT

BEAM ANGLES: 12W, 24W — 15°, 24°, 38°

COLOUR OPTIONS	Housing	White	Black
	Reflector	Black	



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ANGEL PLUS

LFSS1122A,B

SURFACE SPOT LIGHT

ANTI - GLARE

TILTABLE 90°

Accessories

Honeycomb

LFSS1122A-24W

LFSS1122B-12W

LFTL1122B-12W

LFCL1122A-12W

	Wattage (W)	12W	24W
LUMEN OUTPUT	N 4000K	1200	2400
	W 3000K	1140	2280
SYSTEM EFFICIENCY	No. of LEDs	2	4
	THD (%)	10	10
	Power Factor	0.9	0.9
	Driver Rating	30V 300mA	30V 600mA
	URG Rating	<16	<16
	Surge	2.5kV	2.5kV
DIMENSIONS (in mm)	Diameter X	90	105
	Height H	72	72

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	LAFIT

BEAM ANGLES

12W, 24W

15°, 24°, 38°

COLOUR OPTIONS	Housing	White	Black
	Reflector	Black	

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz



ANGEL PLUS

LFCL1122A,B

CEILING RECESSED SPOT LIGHT

ANTI - GLARE

DIMMABLE

TILTABLE 90°

Accessories

Honeycomb

LFCL1122B-24W

LFCL1122A-12W

LFTL1122B-12W

LFSS1122A-24W

	Wattage (W)		12W	24W
LUMEN OUTPUT	N	4000K	1200	2400
	W	3000K	1140	2280
SYSTEM EFFICIENCY	No. of LEDs		2	4
	THD (%)		10	10
	Power Factor		0.9	0.9
	Driver Rating		30V 300mA	30V 600mA
	URG Rating		<16	<16
	Surge		2.5kV	2.5kV
DIMENSIONS (in mm)	Diameter	X	90	105
	Height	H	72	72
	Cutout	Ø	90	90

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	LAFIT
	Dimming	Triac / Analog / Dali

BEAM ANGLES

12W, 24W

15°, 24°, 38°

COLOUR OPTIONS	Housing	White	Black
	Reflector	Black	

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz



LASSO

LFFS1121 / LFFW1121

COB Flexible Strip Light / Cove Light

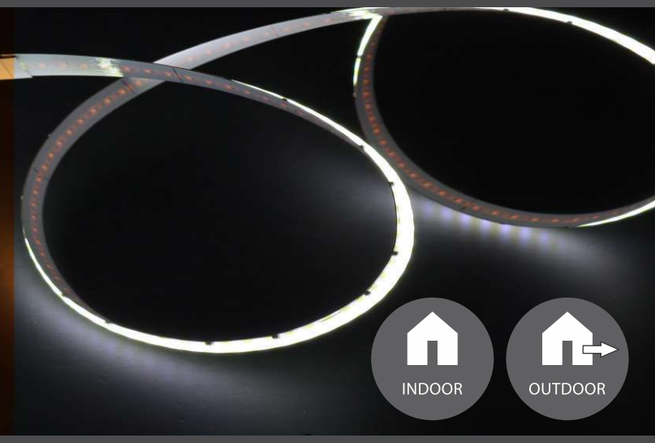

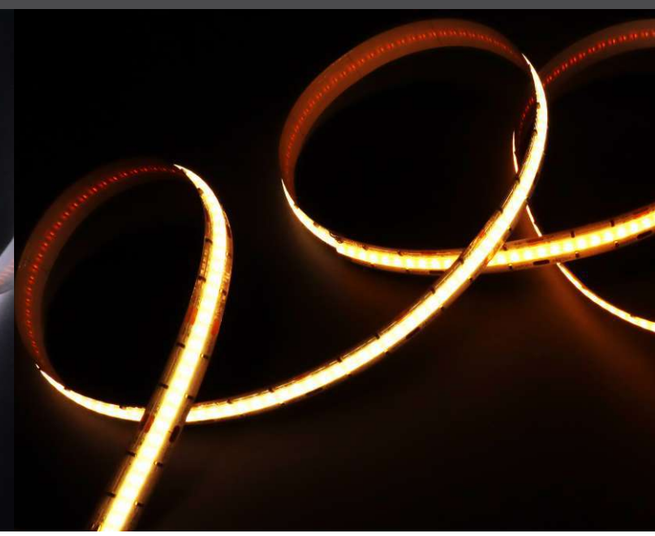

Product Code	Description (per meter)	Wattage (per mtr).	Input Voltage	Colour Temperature	LED Make	Lumens Efficacy (per Watt)	IP Rating	Indoor / Outdoor	Strip Width (in mm)	Role Length	Material
LFFS1121X	480 Pcs (ULTRA SLIM)	5W	24VDC	6500k,4000k,3000k	Epistar	100 lm	IP-20	Indoor	5	5 Mtr	Base of Strip : Copper
LFFS1121X	504 Pcs	12W	24VDC	6500k,4000k,3000k, 2700k	Epistar	90 lm	IP-20	Indoor	10	5 Mtr	Base of Strip : Copper
LFFS1121X	528 Pcs	15W	24VDC	6500k,4000k,3000k	Epistar	100 lm	IP-20	Indoor	10	5 Mtr	Base of Strip : Copper
LFFS1121X	640 Pcs	16W	24VDC	(Tunable) 2700K-6500K 1800K-3000K	Epistar	90 lm	IP-20	Indoor	10	5 Mtr	Base of Strip : Copper
LFFW1121H	504 Pcs	12W	24VDC	3000k	Epistar	90 lm	IP-65 (Hollow Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFFW1121H	528 Pcs	15W	24VDC	3000k	Epistar	100 lm	IP-65 (Hollow Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFFW1121H	640 Pcs	16W	24VDC	(Tunable) 2700k-6500k	Epistar	90 lm	IP-65 (Hollow Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFFW1121S	528 Pcs	15W	24VDC	3000k	Epistar	100 lm	IP-67 (Solid Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFAC1121A	NA	Straight Joiner	24VDC	Strip to strip without wire	NA	NA	IP-20	Indoor	10	NA	NA
LFAC1121C	NA	Power Connector	24VDC	With wire on one end	NA	NA	IP-20	Indoor	10	NA	NA
LFAC1121D	NA	Flexible Joiner	24VDC	With connectors on both end	NA	NA	IP-20	Indoor	10	NA	NA
LFAC1121L	NA	L Connector	24VDC	6500k,4000k,3000k	Epistar	NA	IP-20	Indoor	10	NA	NA
LFAC1121X	NA	X Connector	24VDC	6500k,4000k,3000k	Epistar	NA	IP-20	Indoor	10	NA	NA
LFAC1121T	NA	T Connector	24VDC	6500k,4000k,3000k	Epistar	NA	IP-20	Indoor	10	NA	NA

CRI	TEMP	BEAM
80	0-45°	170°

LAFIT

Down Lights and Spot Lights

ANGEL PLUS

LFSL1122A

LINEAR SPOT LIGHT

ANTI - GLARE

DIMMABLE

TILTABLE

Accessories

Honeycomb

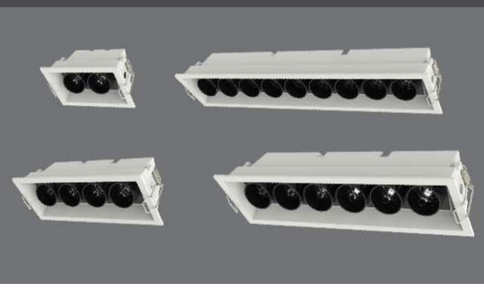

	Wattage (W)		5W	10W	15W	20W
LUMEN OUTPUT	N	4000K	460	920	1380	1840
	W	3000K	450	900	1350	1800
SYSTEM EFFICIENCY	No. of LEDs		2	4	6	9
	THD (%)		-	60	60	≤15
	Power Factor		0.5	0.85	0.85	0.95
	Driver Rating		2.8-9V 700mA	7-12V 700mA	12-21V 700mA	20-40V 700mA
	URG Rating		<16	<16	<16	<16
	Surge		1.5kV	2.5kV	3kV	2kV
DIMENSIONS (in mm)	Size	L	90	150	210	300
		W	67	67	67	67
	Height	H	50	50	50	50
	Cutout	L	83	143	203	293
		W	57	57	57	57

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Allooking (5W), Fulham (10W,15W) BAG (20W)
	Dimming	Triac / Analog(10W,15W,20W) / Dali

BEAM ANGLES

5W, 10W, 15W, 20W

15°, 24°, 38°

COLOUR OPTIONS

Housing	White
Reflector	Black



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ANGEL PLUS

LFSL1122B

LINEAR SPOT LIGHT
TRIMLESS

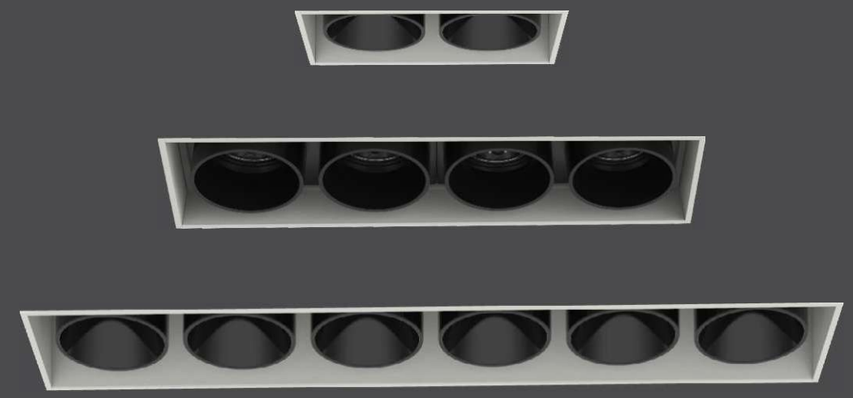

ANTI - GLARE

DIMMABLE

Accessories

Honeycomb

	Wattage (W)		5W	10W	15W
LUMEN OUTPUT	N	4000K	460	920	1380
	W	3000K	450	900	1350
SYSTEM EFFICIENCY	No. of LEDs		2	4	6
	THD (%)		-	60	60
	Power Factor		0.5	0.85	0.85
	Driver Rating		2.8-9V 700mA	7-12V 700mA	12-21V 700mA
	URG Rating		<16	<16	<16
	Surge		1.5kV	2.5kV	3kV
DIMENSIONS (in mm)	Size	L	68	128	187
		W	81	81	81
	Height	H	53	53	53
	Cutout	L	70	130	190
		W	50	50	50

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Allooking (5W), Fulham (10W,15W)
	Dimming	Triac / Analog(10W,15W) / Dali

BEAM ANGLES

5W, 10W, 15W

15°, 24°, 38°

COLOUR OPTIONS

Housing	White
Reflector	Black



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ANGEL PLUS

LFTL1122A,B

TRACK LIGHT

ANTI - GLARE

TILTABLE 90°

Accessories

Honeycomb

LFTL1122B-12W | LFTL1122A-24W | LFSS1122B-12W | LFCL1122A-12W

		Wattage (W)	12W	24W
LUMEN OUTPUT	N	4000K	1200	2400
	W	3000K	1140	2280
SYSTEM EFFICIENCY		No. of LEDs	2	4
		THD (%)	10	10
		Power Factor	0.9	0.9
		Driver Rating	30V 300mA	30V 600mA
		URG Rating	<16	<16
		Surge	2.5kV	2.5kV
DIMENSIONS (in mm)		Diameter X	90	105
		Height H	72	72

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	LAFIT

BEAM ANGLES: 12W, 24W — 15°, 24°, 38°

COLOUR OPTIONS: Housing — White / Black; Reflector — Black

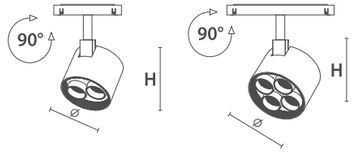

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ANGEL PLUS

LFSS1122A,B

SURFACE SPOT LIGHT

ANTI - GLARE

TILTABLE 90°

Accessories

Honeycomb

LFSS1122A-24W | LFSS1122B-12W | LFTL1122B-12W | LFCL1122A-12W

		Wattage (W)	12W	24W
LUMEN OUTPUT	N	4000K	1200	2400
	W	3000K	1140	2280
SYSTEM EFFICIENCY		No. of LEDs	2	4
		THD (%)	10	10
		Power Factor	0.9	0.9
		Driver Rating	30V 300mA	30V 600mA
		URG Rating	<16	<16
		Surge	2.5kV	2.5kV
DIMENSIONS (in mm)		Diameter X	90	105
		Height H	72	72

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	LAFIT

BEAM ANGLES: 12W, 24W — 15°, 24°, 38°

COLOUR OPTIONS: Housing — White / Black; Reflector — Black

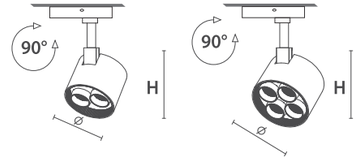

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ANGEL PLUS

LFCL1122A,B

CEILING RECESSED SPOT LIGHT

ANTI - GLARE

DIMMABLE

TILTABLE 90°

Accessories

Honeycomb

LFCL1122B-24W

LFCL1122A-12W

LFTL1122B-12W

LFSS1122A-24W

	Wattage (W)		12W	24W
LUMEN OUTPUT	N	4000K	1200	2400
	W	3000K	1140	2280
SYSTEM EFFICIENCY	No. of LEDs		2	4
	THD (%)		10	10
	Power Factor		0.9	0.9
	Driver Rating		30V 300mA	30V 600mA
	URG Rating		<16	<16
	Surge		2.5kV	2.5kV
DIMENSIONS (in mm)	Diameter	X	90	105
	Height	H	72	72
	Cutout	Ø	90	90

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	LAFIT
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 12W, 24W — 15°, 24°, 38°

COLOUR OPTIONS: Housing — White, Black; Reflector — Black

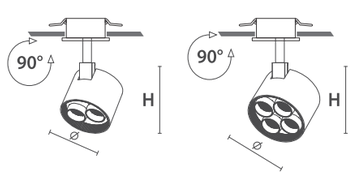

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

PLATINUM - A

LFSL1091A,B,C,D,E

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE

TUNEABLE

DIMMABLE

Accessories

Honeycomb

Beam Soft

Reflector

White

Titanium

Matt Silver

Outer Ring

Retrofit

	Wattage (W)		7W	9W	12W	15W	18W	24W	33W	40W
LUMEN OUTPUT	N	4000K	720	900	1262	1485	1634	2639	3128	4048
	W	3000K	672	840	1262	1485	1634	2500	2924	3784
	W	2700K	672	840	1173	1380	1518	2399	2720	3520
SYSTEM EFFICIENCY	No. of LEDs		1	1	1	1	1	1	1	1
	THD (%)		-	20	20	20	20	15	15	20
	Power Factor		>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95	>0.95
	Driver Rating		36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA	36V DC 400mA	36V DC 600mA	36V DC 700mA	36V DC 1000mA
DIMENSIONS (in mm)	Diameter	X	85	85	85	85	115	115	140	165
	Height	H	89	89	89	89	140	140	169	184
	Cutout	Ø	75	75	75	75	100	100	125	150

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	BAG
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W, 12W, 15W, 18W, 24W, 33W, 40W — 15° 24° 38° 55°

COLOUR OPTIONS: Housing — White, Black; Reflector — Titanium, Matt Silver, White



CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

PLATINUM - B

LFSL1092F,A,B,C,D,E

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE | SINGLE SIDE TILTABLE 25° | TUNEABLE | DIMMABLE

Honeycomb | Beam Soft — Accessories

White | Titanium | Matt Silver — Reflector

Outer Ring

Super Slim Retrofit

Retrofit

Slim Fitting

	Wattage (W)	7W	9W	7W	9W	12W	15W	18W	24W	33W	40W
LUMEN OUTPUT	N 4000K	720	900	720	900	1262	1485	1634	2639	3128	4048
	W 3000K	672	840	672	840	1262	1485	1634	2500	2924	3784
	W 2700K	672	840	672	840	1173	1380	1518	2399	2720	3520
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1	1	1	1
	THD (%)	20	20	-	20	20	20	20	15	15	20
	Power Factor	>0.9	>0.9	>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95	>0.95
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA	36V DC 400mA	36V DC 600mA	36V DC 700mA	36V DC 1000mA
DIMENSIONS (in mm)	Diameter X	62	62	85	85	85	85	115	115	140	165
	Height H	81	81	89	89	89	89	140	140	169	184
	Cutout Ø	55	55	75	75	75	75	100	100	125	150

SYSTEM SPECS

Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W , 18W , 24W , 33W , 40W — 15° 24° 38° 55°

COLOUR OPTIONS

Housing	White	Black	
Reflector	Titanium	Matt Silver	White

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

PLATINUM - C

LFSL1093A,B

RECESSED MODULAR SPOTLIGHT

TRIMLESS

ANTI - GLARE | TILTABLE 25° | TUNEABLE | DIMMABLE

Honeycomb | Beam Soft — Accessories

White | Titanium | Matt Silver — Reflector

Outer Ring

Retrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	N 4000K	720	900	1262	1485
	W 3000K	672	840	1262	1485
	W 2700K	672	840	1173	1380
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	20	20	20
	Power Factor	>0.45	>0.9	>0.9	>0.9
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	Diameter X	74	74	74	74
	Height H	89	89	89	89
	Cutout Ø	75	75	75	75

SYSTEM SPECS

Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

Trim less



COLOUR OPTIONS

Housing	White		
Reflector	Titanium	Matt Silver	White

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

PLATINUM - D

LFSL1094A,B

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE

TUNEABLE

DIMMABLE

Honeycomb

Beam Soft

Accessories



Titanium

Matt Silver

Reflector

Outer Ring

Retrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	N 4000K	720	900	1262	1485
	W 3000K	672	840	1262	1485
	W 2700K	672	840	1173	1380
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	20	20	20
	Power Factor	>0.45	>0.9	>0.9	>0.9
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	Diameter X	68	68	68	68
	Height H	72	72	95	95
	Cutout Ø	60	60	60	60

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	BAG
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

COLOUR OPTIONS: Housing — White / Black; Reflector — Titanium / Matt Silver

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz



PLATINUM - E

LFSL1095A,B,C,D,E

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE

TILTABLE 30°

ROTATABLE 355°

TUNEABLE

DIMMABLE

Honeycomb

Beam Soft

Accessories

Titanium

Matt Silver

Reflector

Outer Ring

Retrofit

	Wattage (W)	7W	9W	12W	15W	18W	24W	33W	40W
LUMEN OUTPUT	N 4000K	720	900	1262	1485	1634	2639	3128	4048
	W 3000K	672	840	1262	1485	1634	2500	2924	3784
	W 2700K	672	840	1173	1380	1518	2399	2720	3520
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1	1
	THD (%)	-	20	20	20	20	15	15	20
	Power Factor	>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95	>0.95
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA	36V DC 400mA	36V DC 600mA	36V DC 700mA	36V DC 1000mA
DIMENSIONS (in mm)	Diameter X	96	96	96	96	125	125	145	165
	Height H	76	76	100	100	117	117	138	152
	Cutout Ø	85	85	85	85	110	110	130	150

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	BAG
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W , 18W , 24W , 33W , 40W — 15° 24° 38° 55°

COLOUR OPTIONS: Housing — White / Black; Reflector — Titanium / Matt Silver

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz



PLATINUM - F

LFSL1096A,B

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE · TUNEABLE · DIMMABLE

Honeycomb · Beam Soft

Accessories



Outer Ring

Retrofit

			7W	9W	12W	15W
Wattage (W)						
LUMEN OUTPUT	N	4000K	720	900	1262	1485
	W	3000K	672	840	1262	1485
	W	2700K	672	840	1173	1380
SYSTEM EFFICIENCY	No. of LEDs		1	1	1	1
	THD (%)		-	20	20	20
	Power Factor		>0.45	>0.9	>0.9	>0.9
	Driver Rating		36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	Diameter	X	85	85	85	85
	Height	H	98	98	121	121
	Cutout	Ø	75	75	75	75

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

COLOUR OPTIONS	
Housing	White
Reflector	White

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz



PLATINUM - G

LFSL1097F,A,B

RECESSED MODULAR SPOTLIGHT (PIN HOLE)

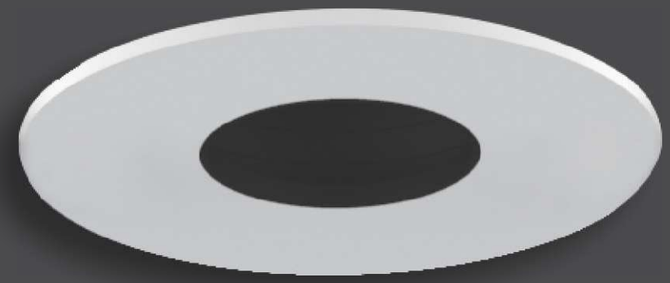

ANTI - GLARE · TUNEABLE · DIMMABLE · TILTABLE 30°

Honeycomb · Beam Soft

Accessories

Outer Ring

Retrofit

Slim Fitting

			7W	9W	7W	9W	12W	15W
Wattage (W)								
LUMEN OUTPUT	N	4000K	720	900	720	900	1262	1485
	W	3000K	672	840	672	840	1262	1485
	W	2700K	672	840	672	840	1173	1380
SYSTEM EFFICIENCY	No. of LEDs		1	1	1	1	1	1
	THD (%)		20	20	-	20	20	20
	Power Factor		>0.9	>0.9	>0.45	>0.9	>0.9	>0.9
	Driver Rating		36V DC 150mA	36V DC 200mA	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	Diameter	X	65	65	75	75	75	75
	Height	H	79	79	91	91	114	114
	Cutout	Ø	55	55	65	65	65	65

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

COLOUR OPTIONS	
Housing	White
Reflector	White

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz



PLATINUM - H

LFSL1098F,A,B

RECESSED MODULAR SPOTLIGHT (OVAL CUT)

ANTI - GLARE | TUNEABLE | DIMMABLE | TILTABLE 30°

Honeycomb | Beam Soft

Accessories

Outer Ring

Retrofit

Slim Fitting

		Wattage (W)	7W	9W	7W	9W	12W	15W
LUMEN OUTPUT	N	4000K	720	900	720	900	1262	1485
	W	3000K	672	840	672	840	1262	1485
	W	2700K	672	840	672	840	1173	1380
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1	1	1
		THD (%)	20	20	-	20	20	20
		Power Factor	>0.9	>0.9	>0.45	>0.9	>0.9	>0.9
		Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	X	Diameter	65	65	75	75	75	75
	H	Height	79	79	91	91	114	114
	Ø	Cutout	55	55	65	65	65	65

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	BAG
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

COLOUR OPTIONS	Housing	White
	Reflector	White

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz



PLATINUM - I

LFSL1099A,B

RECESSED MODULAR SPOTLIGHT (WALL WASHER)

ANTI - GLARE | TUNEABLE | DIMMABLE

Honeycomb | Beam Soft

Accessories

Outer Ring

Retrofit

		Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	N	4000K	720	900	1262	1485
	W	3000K	672	840	1262	1485
	W	2700K	672	840	1173	1380
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1
		THD (%)	-	20	20	20
		Power Factor	>0.45	>0.9	>0.9	>0.9
		Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	X	Diameter	88	88	88	88
	H	Height	88	88	109	109
	Ø	Cutout	75	75	75	75

SYSTEM SPECS	Housing	Aluminium
	LED Make	Cree
	Driver Brand	BAG
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

COLOUR OPTIONS	Housing	White / Black

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz



PLATINUM - J

LFSL1100A,B,C,D

RECESSED MODULAR SPOTLIGHT

ANTI - GLARE · TILTABLE 20° · ROTATABLE 355° · TUNEABLE · DIMMABLE

Outer Ring

Retrofit

	Wattage (W)	7W	9W	12W	15W	18W	24W	33W
LUMEN OUTPUT	N 4000K	720	900	1262	1485	1634	2639	3128
	W 3000K	672	840	1262	1485	1634	2500	2924
	W 2700K	672	840	1173	1380	1518	2399	2720
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1
	THD (%)	-	20	20	20	20	15	15
	Power Factor	>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA	36V DC 400mA	36V DC 600mA	36V DC 700mA
DIMENSIONS (in mm)	Diameter X	90	90	90	90	110	110	130
	Height H	79	79	102	102	116	116	139
	Cutout Ø	80	80	80	80	95	95	115

SYSTEM SPECS

Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali



BEAM ANGLES

7W, 9W , 12W , 15W , 18W , 24W , 33W , 40W

15° 24° 38° 55°

COLOUR OPTIONS

Housing: White | Black

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

PLATINUM - K

LFSL1101A,B,C,D,E

RECESSED MODULAR SPOTLIGHT

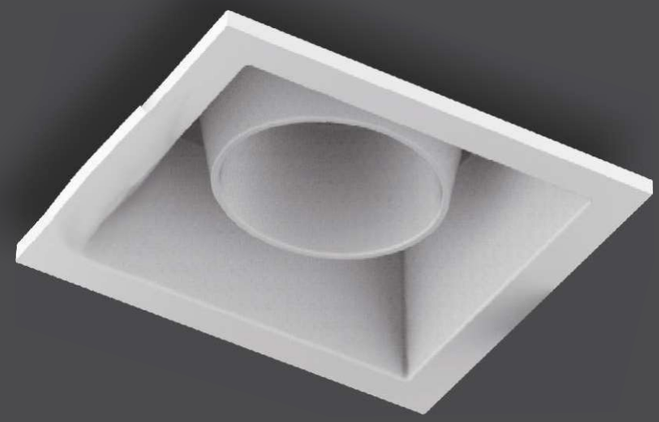

ANTI - GLARE · TILTABLE 20° · ROTATABLE 355° · TUNEABLE · DIMMABLE

Outer Ring

Retrofit

	Wattage (W)	7W	9W	12W	15W	18W	24W	33W
LUMEN OUTPUT	N 4000K	720	900	1262	1485	1634	2639	3128
	W 3000K	672	840	1262	1485	1634	2500	2924
	W 2700K	672	840	1173	1380	1518	2399	2720
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1
	THD (%)	-	20	20	20	20	15	15
	Power Factor	>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA	36V DC 400mA	36V DC 600mA	36V DC 700mA
DIMENSIONS (in mm)	Size L	90	90	90	90	110	110	130
	W	90	90	90	90	110	110	130
	Height H	79	79	102	102	116	116	139
	Cutout L	80	80	80	80	95	95	115
	W	80	80	80	80	95	95	115

SYSTEM SPECS

Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali



BEAM ANGLES

7W, 9W , 12W , 15W , 18W , 24W , 33W , 40W

15° 24° 38° 55°

COLOUR OPTIONS

Housing: White | Black

CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

PLATINUM - L

LFGL1102A,B,C,D,E

RECESSED MODULAR GIMBLE LIGHT

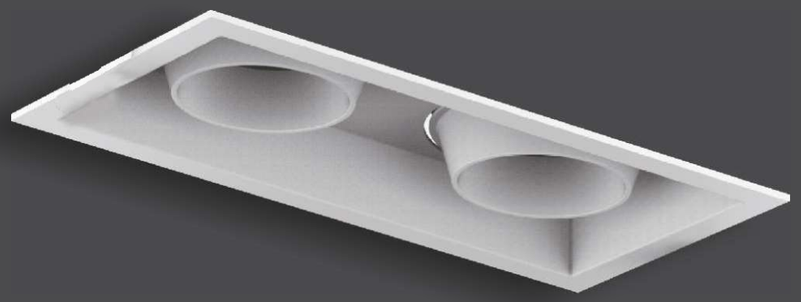

ANTI - GLARE · TILTABLE 20° · ROTATABLE 355° · TUNEABLE · DIMMABLE

Outer Ring

Retrofit

	Wattage (W)	14W	18W	24W	30W	36W	48W	66W
LUMEN OUTPUT	N 4000K	1440	1800	2524	2970	3268	5278	6256
	W 3000K	1345	1680	2524	2970	3268	5000	5848
	W 2700K	1345	1680	2345	2760	3036	4798	5440
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1	1	1	1
	THD (%)	-	20	20	20	20	15	15
	Power Factor	>0.45	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95
	Driver Rating	36V DC 150mA x2	36V DC 200mA x2	36V DC 300mA x2	36V DC 350mA x2	36V DC 400mA x2	36V DC 600mA x2	36V DC 700mA x2
DIMENSIONS (in mm)	Size L	175	175	175	175	220	220	260
	Size W	90	90	90	90	110	110	130
	Height H	79	79	102	102	116	116	139
	Cutout L	165	165	165	165	205	205	245
	Cutout W	80	80	80	80	95	95	115

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES: 14W, 18W , 24W , 30W , 36W , 48W , 66W — 15° 24° 38° 55°

COLOUR OPTIONS: Housing — White / Black



CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-20	240V/ 50Hz

PLATINUM - M

LFSL1110A,B

RECESSED MODULAR SPOT LIGHT

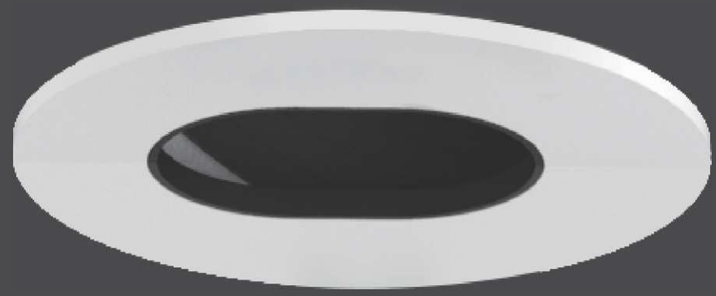

ANTI - GLARE · TUNEABLE · DIMMABLE



Outer Ring

RetrofiRetrofit

	Wattage (W)	7W	9W	12W	15W
LUMEN OUTPUT	N 4000K	720	900	1262	1485
	W 3000K	672	840	1262	1485
	W 2700K	672	840	1173	1380
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	-	20	20	20
	Power Factor	>0.45	>0.9	>0.9	>0.9
	Driver Rating	36V DC 150mA	36V DC 200mA	36V DC 300mA	36V DC 350mA
DIMENSIONS (in mm)	Diameter X	88	88	88	88
	Height H	93	93	116	116
	Cutout Ø	75	75	75	75

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES: 7W, 9W , 12W , 15W — 15° 24° 38° 55°

COLOUR OPTIONS: Housing — White



CRI	TEMP	IP RATING	INPUT
80 / 90	0-45°	IP-54	240V/ 50Hz

SKEW

LFSL1111A

RECESSED WALLWASHER

WALL WASHER

TUNEABLE

DIMMABLE

	Wattage (W)	12W	15W	24W	28W
LUMEN OUTPUT	N 4000K	1262	1485	2358	3128
	W 3000K	1262	1485	2358	2924
	WW 2700K	1173	1380	2196	2720
SYSTEM EFFICIENCY	No. of LEDs	1	1	1	1
	THD (%)	<20	<20	<20	<20
	Power Factor	>0.9	>0.9	>0.95	>0.95
	Driver Rating	36V DC 300mA	36V DC 350mA	36V DC 600mA	36V DC 700mA
	Surge	2kV	2kV	3kV	3kV
DIMENSIONS (in mm)	Diameter X	105	105	135	135
	Height H	59.5	59.5	69.5	69.5
	Cutout Ø	90	90	120	120

SYSTEM SPECS	
Housing	Aluminium
LED Make	Cree
Driver Brand	BAG
Dimming	Triac / Analog / Dali

COLOUR OPTIONS	
Housing	White



CRI	TEMP	IP RATING	INPUT
80	0-45°	IP-20	240V/ 50Hz

RADIUS

LFDL1077R

RECESSED FIXED DOWNLIGHT

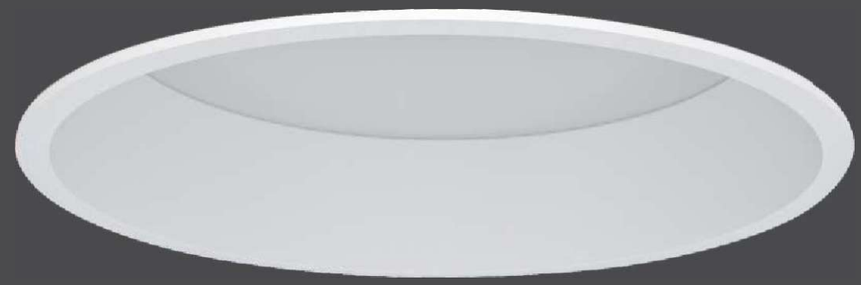

TUNEABLE

DIMMABLE

	Wattage (W)	7W	10W	12W	15W	20W	25W	30W	35W
LUMEN OUTPUT	C 6500K	734	979	1468	1713	2448	2937	3672	4161
	N 4000K	734	979	1468	1713	2448	2937	3672	4161
	W 3000K	707	943	1414	1650	2358	2829	3537	4008
SYSTEM EFFICIENCY	No. of LEDs	36	36	48	48	96	96	144	144
	THD (%)	-	20	20	20	20	15	15	15
	Power Factor	>0.5	>0.9	>0.9	>0.9	>0.9	>0.95	>0.95	>0.95
	Driver Rating	27-40V DC 150mA	23-45V DC 200mA	22-44V DC 300mA	26-36V DC 350mA	20-40V DC 500mA	25-50V DC 600mA	37V DC 750mA	37V DC 850mA
	Surge	2kV	2kV	2kV	2kV	2kV	2kV	2kV	2kV
DIMENSIONS (in mm)	Diameter X	78	78	103	103	153	153	211	211
	Height H	55	55	58	58	58	58	58	58
	Cutout Ø	72	72	98	98	148	148	206	206

SYSTEM SPECS	
Housing	Aluminum
LED Make	Bridgelux
Driver Brand	BAG
Dimming	Triac / Analog / Dali

BEAM ANGLES	
	7W,10W,12W,15W,20W,25W,30W,35W
	90°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

SHARP

LFSL1041R

RECESSED FIXED SPOT LIGHT (PIN HOLE)

Wattage (W)			10W
LUMEN OUTPUT	N	4000K	966
	W	3000K	943
SYSTEM EFFICIENCY		No. of LEDs	1
		THD (%)	<60
		Power Factor	0.85
		Driver Rating	7-12V DC 700mA
DIMENSIONS (in mm)		Diameter X	70
		Height H	69
		Cutout Ø	63

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Fulham

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

EVA

LFSL1078R

RECESSED FIXED SPOTLIGHT

ANTI - GLARE

DIMMABLE



Wattage (W)			3W	9W	12W
LUMEN OUTPUT	N	4000K	193	828	1336
	W	3000K	193	720	1262
SYSTEM EFFICIENCY		No. of LEDs	1	1	1
		THD (%)	-	20	20
		Power Factor	-	>0.9	>0.9
		Driver Rating	3V DC 700mA	36V DC 200mA	36V DC 300mA
DIMENSIONS (in mm)		Diameter X	35	57	77
		Height H	36	50	70
		Cutout Ø	31	52	72

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Egalrise (3W), BAG (9W/12W)
	Dimming	Triac / Analog / Dali

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

VISTA

LFSL1046R

RECESSED FIXED DOWNLIGHT

TUNEABLE

DIMMABLE

		Wattage (W)	7W	12W	18W
LUMEN OUTPUT	C	6500K	617	1170	1669
	N	4000K	617	1170	1559
	W	3000K	572	1092	1559
SYSTEM EFFICIENCY		No. of LEDs	1	1	1
		THD (%)	-	55	60
		Power Factor	≥0.5	>0.85	0.85
		Driver Rating	38V DC 150mA	38V DC 300mA	38V DC 400mA
DIMENSIONS (in mm)		Diameter X	60	70	84
		Height H	78	94	125
		Cutout Ø	50	62	75

SYSTEM SPECS	
Housing	Aluminum
LED Make	Cree
Driver Brand	Bag
Dimming	Triac / Analog

BEAM ANGLES

7W, 12W, 18W

38°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

BEACON

LFSL1042A

RECESSED FIXED DOWNLIGHT

LFSL1042A

Trimless
LFSL1042B

Surface
LFSS1043A/B

		Wattage (W)	11W
LUMEN OUTPUT	C	6500K	-
	N	4000K	1073
	W	3000K	998
SYSTEM EFFICIENCY		No. of LEDs	3
		THD (%)	60
		Power Factor	0.85
		Driver Rating	21-42V DC 350mA
		Surge	3kV
DIMENSIONS (in mm)		Size L	120
		W	55
		Height H	57
		Cutout L	110
		W	45

SYSTEM SPECS	
Housing	Aluminum PDC
LED Make	Bridgelux
Driver Brand	Fulham
Dimming	Triac / Analog

BEAM ANGLES

11W

24°



COLOUR OPTIONS

Housing: White

Inner-Ring: Black

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

BEACON

LFSL1042B

RECESSED FIXED TRIMLESS DOWNLIGHT

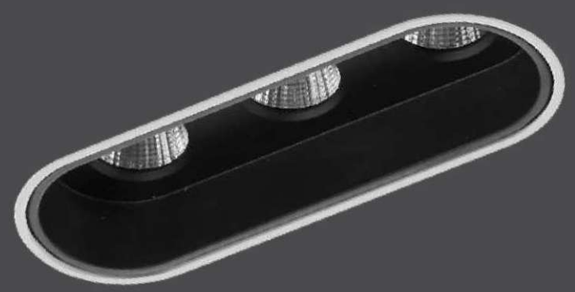



LFSL1042B



Recessed
LFSL1042A

Surface
LFSS1043A/B

	Wattage (W)		11W
LUMEN OUTPUT	N	4000K	1073
	W	3000K	998
SYSTEM EFFICIENCY		No. of LEDs	3
		THD (%)	60
		Power Factor	0.85
		Driver Rating	21-42V DC 350mA
		Surge	3kV
DIMENSIONS (in mm)	Size	L	207
		W	77
	Height	H	66
	Cutout	L	157
		W	80

SYSTEM SPECS	Housing	Aluminum + Gypsum
	LED Make	Bridgelux
	Driver Brand	Fulham
	Dimming	Triac / Analog



BEAM ANGLES: 11W, 24°

COLOUR OPTIONS	Housing	White
	Inner Ring	Black

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

DELON

LFSL1037A, B, C, D

RECESSED FIXED DOWNLIGHT

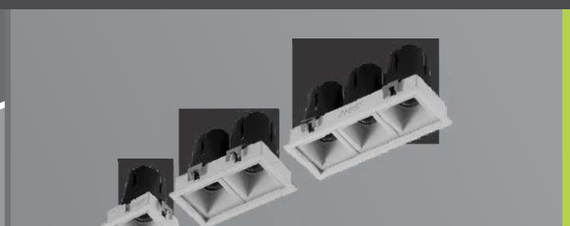

	Wattage (W)		5W	10W	15W	20W
LUMEN OUTPUT	N	4000K	595	1190	1785	2380
	W	3000K	559	1115	1675	2235
SYSTEM EFFICIENCY		No. of LEDs	1	2	3	4
		THD (%)	-	-	-	≥10
		Power Factor	0.5	0.9	0.9	0.95
		Driver Rating	9V 500mA	18V 500mA	27V 500mA	36V 500mA
DIMENSIONS (in mm)	Size	L	52	92	132	92
		W	52	52	52	92
	Height	H	69	69	69	69
	Cutout	L	48	88	128	88
		W	48	48	48	88

SYSTEM SPECS	Housing	Aluminum PDC
	LED Make	Bridgelux
	Driver Brand	Bag
	Dimming	Triac / Analog



BEAM ANGLES: 5W, 10W, 15W, 20W, 30°

COLOUR OPTIONS	Housing	White
	Reflector	White / Black / Chrome / Copper

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LUMIX A

LFSL1045A

TRIMLESS ADJUSTABLE SPOTLIGHT

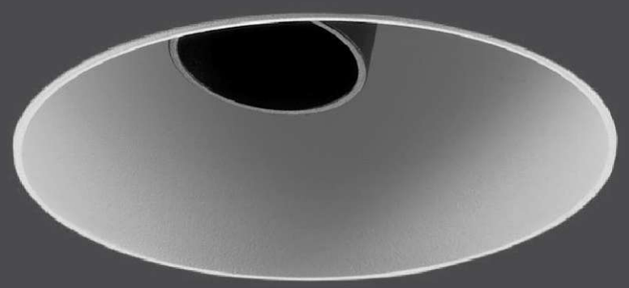

ANTI - GLARE

TILTABLE



	Wattage (W)		9W
LUMEN OUTPUT	N	4000K	690
	W	3000K	640
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Power Factor		0.8
	Driver Rating		9-15V DC 700mA
	Surge		1.7kV
DIMENSIONS (in mm)	Diameter	X	124
	Height	H	111
	Cutout	Ø	90

SYSTEM SPECS	Housing	Aluminum
	LED Make	Bridgelux
	Driver Brand	Philips
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 9W, 18°

COLOUR OPTIONS: Housing — White; Inner Ring — Black



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

LUMIX B

LFSL1045B

TRIMLESS ADJUSTABLE SPOTLIGHT

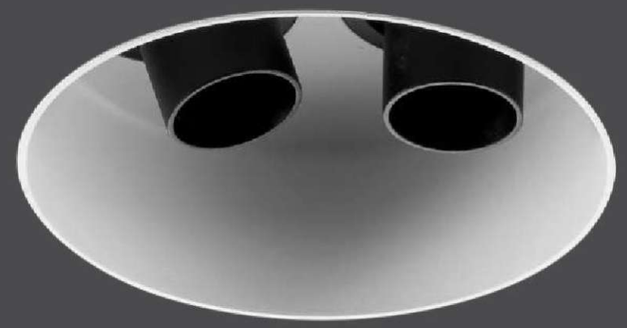

TILTABLE

ANTI - GLARE

	Wattage (W)		18W
LUMEN OUTPUT	N	4000K	1380
	W	3000K	1280
SYSTEM EFFICIENCY	No. of LEDs		2
	THD (%)		-
	Power Factor		0.8
	Driver Rating		9-15V DC 700mA x 2
	Surge		1.7kV
DIMENSIONS (in mm)	Diameter	X	159
	Height	H	111
	Cutout	Ø	125

SYSTEM SPECS	Housing	Aluminum
	LED Make	Bridgelux
	Driver Brand	Philips
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 9W, 18°

COLOUR OPTIONS: Housing — White; Inner Ring — Black



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

LUMIX C

LFSL1045C

TRIMLESS ADJUSTABLE SPOTLIGHT

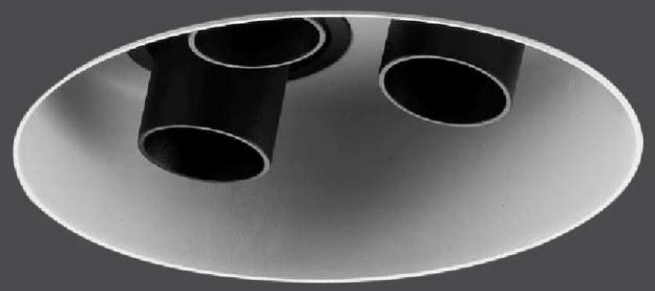

ANTI - GLARE

TILTABLE

Wattage (W)			27W
LUMEN OUTPUT	N	4000K	2070
	W	3000K	1920
SYSTEM EFFICIENCY		No. of LEDs	3
		THD (%)	60
		Power Factor	0.8
		Driver Rating	9-15V DC 700mA x 3
		Surge	1.7kV
DIMENSIONS (in mm)		Diameter X	169
		Height H	111
		Cutout Ø	135

SYSTEM SPECS	Housing	Aluminum
	LED Make	Bridgelux
	Driver Brand	Philips
	Dimming	Triac / Analog / Dali

BEAM ANGLES: 9W — 18°

COLOUR OPTIONS	Housing	White
	Inner Ring	Black



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

RACE

LFSL1007A

RECESSED ADJUSTABLE SPOTLIGHT

ANTI - GLARE

TILTABLE 30°

TUNEABLE

DIMMABLE



Wattage (W)			6W	9W	12W	15W
LUMEN OUTPUT	N	4000K	641.25	824	1215	1500
	W	3000K	594	763	1134	1350
SYSTEM EFFICIENCY		No. of LEDs	1	1	1	1
		THD (%)	20	20	20	20
		Power Factor	>0.9	>0.9	>0.9	>0.9
		Driver Rating	36VDC 150mA	36VDC 200mA	36VDC 250mA	36VDC 300mA
DIMENSIONS (in mm)		Diameter X	93	105	105	105
		Height H	82	96	96	96
		Cutout Ø	85	98	98	98

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Bag
	Dimming	Triac/ Analog/ Dali

BEAM ANGLES: 6W — 24° ; 9W, 12W, 15W — 38°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ASTRUM

LFDL907A

RECESSED ADJUSTABLE SPOTLIGHT

DIMMABLE

TILTABLE 25°

ANTI - GLARE

			7W	12W
	Wattage (W)			
LUMEN OUTPUT	C	6500K	650	1130
	N	4000K	615	1100
	W	3000K	560	1060
SYSTEM EFFICIENCY	No. of LEDs		1	1
	THD (%)		55	55
	Power Factor		0.80	0.85
	Driver Rating		16-27V DC 300mA	28-40V DC 300mA
	Surge		2kV	2kV
DIMENSIONS (in mm)	Diameter	X	90	90
	Height	H	92	92
	Cutout	Ø	83	83

SYSTEM SPECS	Housing	Aluminum
	LED Make	Bridgelux
	Driver Brand	Philips
	Dimming	Triac / Analog

BEAM ANGLES: 7W, 12W — 36°

COLOUR OPTIONS	Housing	White
	Reflector	Black / Copper



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

MINI ANGLE

LFSL1050

RECESSED LINEAR SPOTLIGHTS

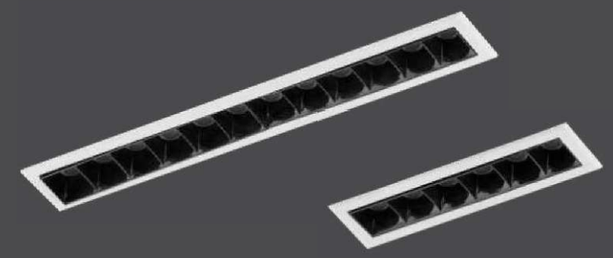



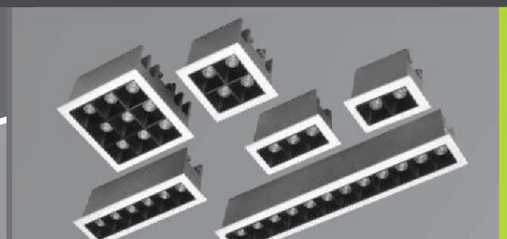

			4W	6W	8W	12W	18W	24W
	Wattage (W)							
LUMEN OUTPUT	C	6500K	417	626	940	1411	2008	2678
	N	4000K	405	607	912	1368	1944	2592
	W	3000K	385	578	867	1300	1850	2467
SYSTEM EFFICIENCY	No. of LEDs		2	3	4	6	9	12
	THD (%)		-	-	-	60	10	10
	Power Factor		0.5	0.5	0.5	0.85	0.97	0.97
	Driver Rating		2-10V DC 500mA	2-10V DC 500mA	8-24V DC 600mA	21-21V DC 640mA	18-36V DC 610mA	18-36V DC 610mA
DIMENSIONS (in mm)	Diameter	L	52	62	52	108	71	204
		W	32	32	52	32	71	32
	Height	H	40	40	40	40	40	40
	Cutout	L	47	57	47	104	66	200
		W	28	28	47	28	66	28

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Allooking (2W, 6W, 8W), Fulham (12W, 18W, 24W)
	Dimming	Triac / Analog/ Dali

BEAM ANGLES: 2W, 6W, 8W, 12W, 18W, 24W — 27°



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

DINAL

LFSL1022, LFOD1022

RECESSED WATERPROOF SPOTLIGHT

TUNEABLE | DIMMABLE | IP54 WATER PROOF (LFSL1022) | IP65 WATER PROOF (LFOD1022)

		LFSL1022	LFOD1022
	Wattage (W)	12W	12W
LUMEN OUTPUT	N 4000K	1215	1080
	W 3000K	1134	1008
SYSTEM EFFICIENCY	No. of LEDs	1	1
	THD (%)	≤ 60	10
	Power Factor	0.85	0.98
	Driver Rating	28-40V DC 300mA	21-42V DC 250mA
	Surge	2kV	4kV
DIMENSIONS (in mm)	Diameter X	78	78
	Height H	72	72
	Cutout Ø	70	70

SYSTEM SPECS

Housing	Aluminum
LED Make	Cree
Driver Brand	Philips (LFSL1022) Fulham (LFDL1022)

BEAM ANGLES



CRI	TEMP	IP RATING		INPUT
		LFSL1022	LFOD1022	
80	0-50°	IP-54	IP-65	240V/ 50Hz

ADAH

LFSL1018

RECESSED WATERPROOF SPOTLIGHT

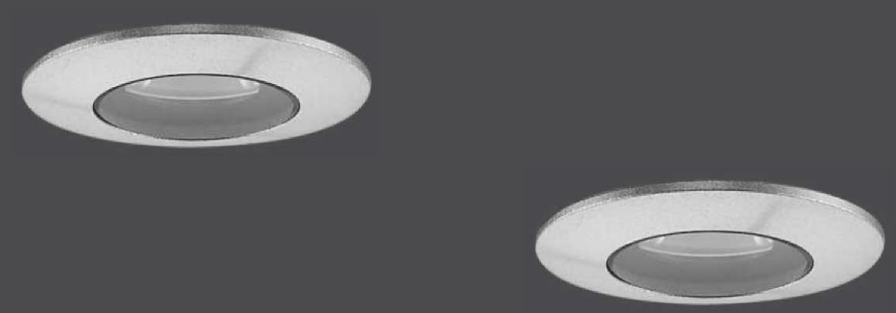

IP54 WATER PROOF

		2W
	Wattage (W)	
LUMEN OUTPUT	C 6500K	155
	N 4000K	136
	W 3000K	127
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	0.5
	Driver Rating	4V DC 500mA
DIMENSIONS (in mm)	Diameter X	45
	Height H	45
	Cutout Ø	40

SYSTEM SPECS

Housing	Aluminum
LED Make	Cree
Driver Brand	Allooking

BEAM ANGLES



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-54	240V/ 50Hz

ACE

LFSL1084R/C/D/E

RECESSED CABINET SPOTLIGHTS

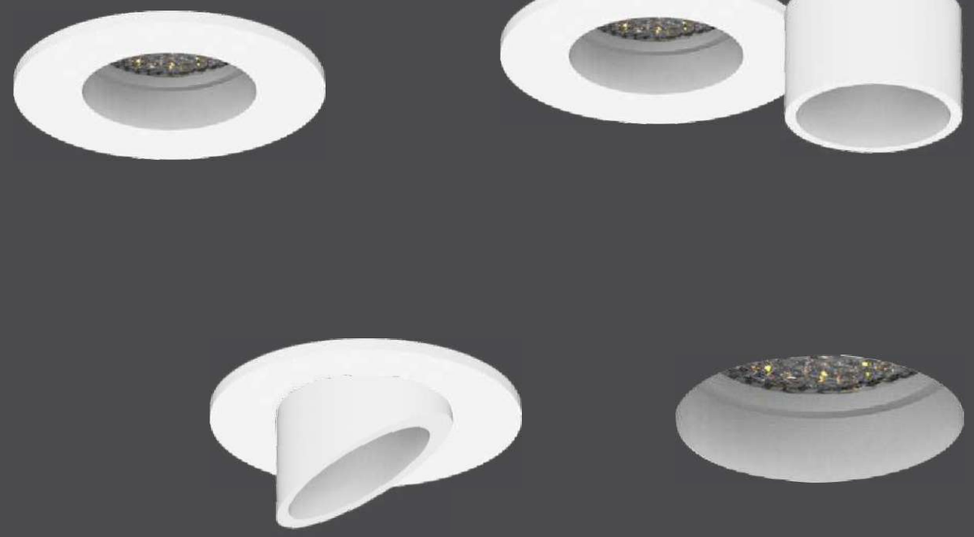

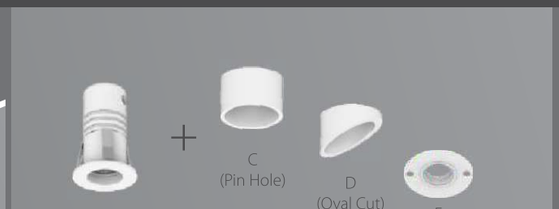

	Wattage (W)		1W			
LUMEN OUTPUT	C	6500K	140			
	N	4000K	114			
	W	3000K	106			
SYSTEM EFFICIENCY	No. of LEDs		1			
	THD (%)		-			
	Power Factor		-			
	Driver Rating		3V DC 300mA			
DIMENSIONS (in mm)	Diameter	X	25	25	25	50.5
	Height	H	38.5 (Standard)	48.5 (Pin Hole)	48.5 (Ovalcut)	38.5 (Rimless)
	Cutout	Ø	20	20	20	33

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	La?t

BEAM ANGLES

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

DINA

LFSL1020

RECESSED CABINET SPOTLIGHTS

ADJUSTABLE BEAM ANGLE | IP32 | ZOOM TILT | TILTABLE 25°

	Wattage (W)		Wattage (W)	2.5W	2W
LUMEN OUTPUT	C	6500K	6500K	165	155
	N	4000K	4000K	136	136
	W	3000K	3000K	127	127
SYSTEM EFFICIENCY	No. of LEDs		No. of LEDs	1	1
	THD (%)		THD (%)	-	-
	Power Factor		Power Factor	0.5	0.5
	Driver Rating		Driver Rating	2-4VDC 500mA	2-4VDC 500mA
DIMENSIONS (in mm)	Diameter	X	Diameter	58	40
	Height	H	Height	48	32
	Cutout	Ø	Cutout	50	36

SYSTEM SPECS	Housing	Housing	Aluminum
	LED Make	LED Make	Cree
	Driver Brand	Driver Brand	La?t

BEAM ANGLES



COLOUR OPTIONS: Anodize Matt Black

CRI	TEMP	IP RATING	IP	INPUT	INPUT
80	0-50°	IP-32		240V/ 50Hz	240V/ 50Hz

DINA

LFSL1020

RECESSED CABINET SPOTLIGHTS

ADJUSTABLE BEAM ANGLE

IP32

ZOOM TILT

TILTABLE 25°

Wattage (W)			2.5W
LUMEN OUTPUT	C	6500K	155
	N	4000K	136
	W	3000K	127
SYSTEM EFFICIENCY		No. of LEDs	1
		THD (%)	-
		Power Factor	0.5
		Driver Rating	2-4VDC 500mA
DIMENSIONS (in mm)		Diameter X	58
		Height H	48
		Cutout Ø	50

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Allooking

BEAM ANGLES





CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-32	240V/ 50Hz

Project: Louis Philippe Showroom (Nagarcoil, Tamil Nadu)

Project: Saraza Banquet (Rajkot)

LAFIT

Magnetic Series

DAWNA

LFJW639 A, B

JEWELLERY / DISPLAY LIGHTS

LFJW639 A

LFJW639 B

Connectors

Connectors



		LFJW639 A	LFJW639 B
	Wattage (W)	5W	5W
LUMEN OUTPUT	N 4000K	408	408
	W 3000K	380	380
SYSTEM EFFICIENCY	No. of LEDs	1	1
	THD (%)	-	-
	Power Factor	0.85	0.85
	Driver Rating	12V DC 350mA	12V DC 350mA
SYSTEM SPECS	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Fulham	
BEAM ANGLES	5W 35°		

LFJW639 A

DIMENSIONS (in mm)		
Diameter	X	37
Width	W	71
Height	H	110



LFJW639 A

LFJW639 B

DIMENSIONS (in mm)		
Diameter	X	37
Width	W	102
Height	H	228



LFJW639 B

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

DAWNA

LFJW639 C, D

JEWELLERY / DISPLAY LIGHTS

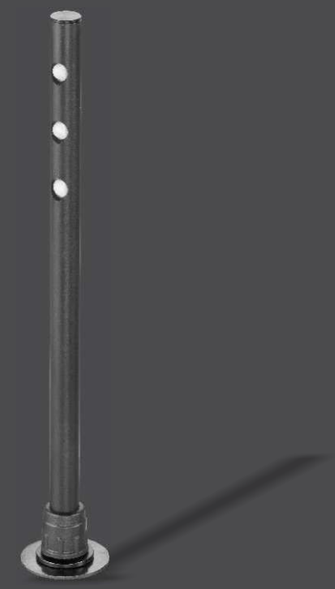

LFJW639 C

LFJW639 D

Connectors

Connectors



		LFJW639 C	LFJW639 D
	Wattage (W)	3W	3W
LUMEN OUTPUT	N 4000K	363	363
	W 3000K	348	348
SYSTEM EFFICIENCY	No. of LEDs	3	3
	THD (%)	-	-
	Power Factor	0.85	0.85
	Driver Rating	12V DC 300mA	12V DC 300mA
SYSTEM SPECS	Housing	Aluminum	
	LED Make	Cree	
	Driver Brand	Fulham	
BEAM ANGLES	3W 90°		

LFJW639 C

DIMENSIONS (in mm)		
Diameter	X	10
Height	H	200



LFJW639 C

LFJW639 D

DIMENSIONS (in mm)		
Diameter	X	10
Width	W	62
Height	H	327



LFJW639 D

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ZIA

LFJW636A, LFJW637A, B

JEWELLERY / DISPLAY LIGHTS

LFJW637A

LFJW637B

LFJW636A

Wattage (W)			5W
LUMEN OUTPUT	C	6500K	-
	N	4000K	485
	W	3000K	480
SYSTEM EFFICIENCY	No. of LEDs		-
	THD (%)		-
	Power Factor		0.85
	Driver Rating		12V DC 350mA
SYSTEM SPECS	Housing		Die-Casting Aluminum
	LED Make		Cree
	Driver Brand		Meanwell (for multiple products) Fulham (for single product)

BEAM ANGLES

LFJW636A	LFJW637A, B
35°	120°

LFJW636A

DIMENSIONS (in mm)	Diameter	X	54
	Width	W	26
	Height	H	56



LFJW637A

DIMENSIONS (in mm)	Size	L	104
		W	25
	Height	H	7



LFJW637B

DIMENSIONS (in mm)	Size	L	53
		W	25
	Height	H	18



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	12VDC

MARBUL PLUS

LFTL1124 C

MEGNETIC TRACK LIGHTS

Honeycomb Beam Soft

DIMMABLE | ANTI - GLARE | TUNEABLE | TILTABLE 90° | 48 V DC | Alexa

LFJW636A

LFJW637A

LFJW637B

Surface



Recessed



Hanging

			5W	12W	20W
Wattage (W)					
LUMEN OUTPUT	N	4000K	550	1320	2200
	W	3000K	525	1260	2100
SYSTEM EFFICIENCY	No. of LEDs		1	1	1
	Driver Rating		48V DC	48V DC	48V DC
	UGR Rating		>14	>14	>14
DIMENSIONS (in mm)	Diameter	Ø	40	60	80
	Height	H	90	121	151
	Adapter	L	185	185	185

Recessed (Trimless)

Track Size	L	500 /1000 / 2000
	W	67
	H	54
Cutout	Ø	30

Surface mounted / Pendant / Recessed

Track Size	L	500 /1000 / 2000
	W	27 (23mm Inner width)
	H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES

5W,12W,20W

36°

COLOUR OPTIONS

Black



Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 D

MEGNETIC TRACK LIGHTS

DIMMABLE · ANTI - GLARE · TILTABLE 90° · 48 V DC

Surface



Recessed



Hanging

Wattage (W)			12W
LUMEN OUTPUT	N	4000K	1200
	W	3000K	1080
SYSTEM EFFICIENCY	No. of LEDs		-
	Driver Rating		48V DC
	UGR Rating		>25
DIMENSIONS (in mm)	Diameter	Ø	113
	Height	H	35
	Adapter	L	185
Recessed (Trimless)			
	Track Size	L	500 /1000 / 2000
		W	67
		H	54
	Cutout	Ø	30
Surface mounted / Pendant / Recessed			
	Track Size	L	500 /1000 / 2000
		W	27 (23mm Inner width)
		H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Edison
	Driver Brand	Meanwell (External)
BEAM ANGLES	12W	100°
COLOUR OPTIONS	Black	

Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 E

MEGNETIC TRACK LIGHTS

DIMMABLE · ANTI - GLARE · TUNEABLE · 48 V DC · Alexa

Surface



Recessed



Hanging

Wattage (W)			6W	12W	18W
LUMEN OUTPUT	N	4000K	660	1320	1980
	W	3000K	630	1260	1890
SYSTEM EFFICIENCY	No. of LEDs		6	12	18
	Driver Rating		48V DC	48V DC	48V DC
	UGR Rating		>9	>9	>9
DIMENSIONS (in mm)	Size	L	119	233	348
		W	22	22	22
	Height	H	43	43	43
Recessed (Trimless)					
	Track Size	L	500 /1000 / 2000		
		W	67		
		H	54		
	Cutout	Ø	30		
Surface mounted / Pendant / Recessed					
	Track Size	L	500 /1000 / 2000		
		W	27 (23mm Inner width)		
		H	54		

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)
BEAM ANGLES	6W,12W,18W	30°
COLOUR OPTIONS	Black	



Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 F

MEGNETIC TRACK LIGHTS

DIMMABLE · ANTI - GLARE · TUNEABLE · TILTABLE 90° · 48 V DC · Alexa

Surface



Recessed



Hanging

		Wattage (W)	6W	12W
LUMEN OUTPUT	N	4000K	660	1320
	W	3000K	630	1260
SYSTEM EFFICIENCY		No. of LEDs	6	12
		Driver Rating	48V DC	48V DC
		UGR Rating	>9	>9
DIMENSIONS (in mm)	Size	L	119	233
		W	22	22
	Height	H	55	55
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)
BEAM ANGLES	6W,12W,18W	
	30°	
COLOUR OPTIONS	Black	

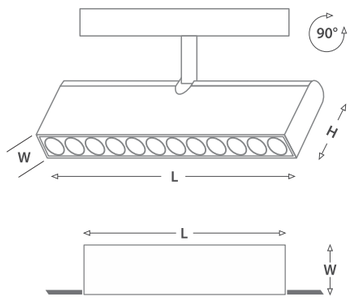

Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 G

MEGNETIC TRACK LIGHTS

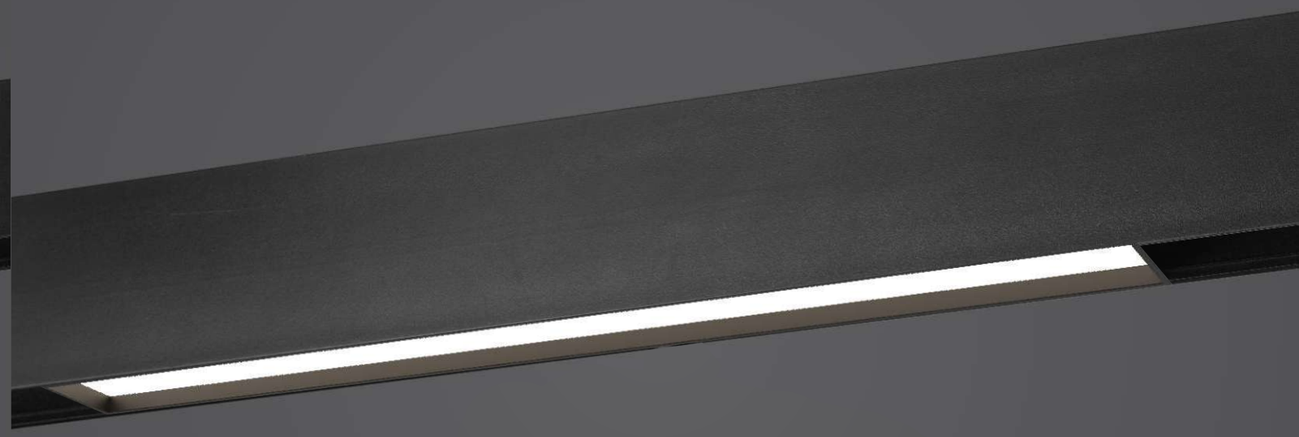

DIMMABLE · ANTI - GLARE · TUNEABLE · 48 V DC · Alexa

Surface



Recessed



Hanging

		Wattage (W)	7W	15W	22W
LUMEN OUTPUT	N	4000K	700	1500	2200
	W	3000K	630	1350	2090
SYSTEM EFFICIENCY		Driver Rating	48V DC	48V DC	48V DC
		UGR Rating	>25	>25	>25
DIMENSIONS (in mm)	Size	L	233	463	693
		W	22	22	22
	Height	H	43	43	43
Recessed (Trimless)					
	Track Size	L	500 /1000 / 2000		
		W	67		
		H	54		
	Cutout	Ø	30		
Surface mounted / Pendant / Recessed					
	Track Size	L	500 /1000 / 2000		
		W	27 (23mm Inner width)		
		H	54		

SYSTEM SPECS	Housing	Aluminum
	LED Make	Edison
	Driver Brand	Meanwell (External)
BEAM ANGLES	7W,15W,22W	
	100°	
COLOUR OPTIONS	Black	



Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 H

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		5W	12W
LUMEN OUTPUT	N	4000K	550	1320
	W	3000K	525	1260
SYSTEM EFFICIENCY	No. of LEDs		-	-
	Driver Rating		48V DC	48V DC
	UGR Rating		>14	>14
DIMENSIONS (in mm)	Diameter	Ø	40	50
	Height	H	300	300
	Adapter	L	185	185
	Hanging wire	L	1.5m	1.5m
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

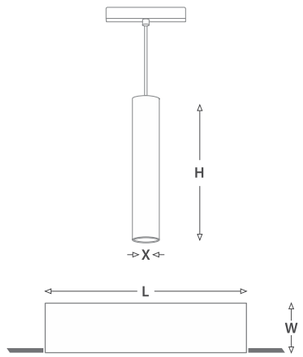

Track Trimless

MARBUL PLUS

LFTL1124 I

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		5W
LUMEN OUTPUT	N	4000K	550
	W	3000K	525
SYSTEM EFFICIENCY	No. of LEDs		-
	Driver Rating		48V DC
	UGR Rating		>9
DIMENSIONS (in mm)	Diameter	Ø	79
	Height	H	120
	Adapter	L	185
	Hanging wire	L	1.5m
Recessed (Trimless)			
	Track Size	L	500 /1000 / 2000
		W	67
		H	54
	Cutout	Ø	30
Surface mounted / Pendant / Recessed			
	Track Size	L	500 /1000 / 2000
		W	27 (23mm Inner width)
		H	54

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

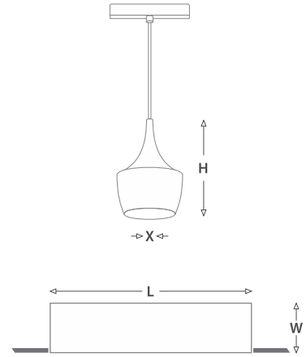

Track Trimless

MARBUL PLUS

LFTL1124 J

MEGNETIC TRACK LIGHTS

Surface 5W

10W


Recessed


Hanging

			5W	10W
Wattage (W)				
LUMEN OUTPUT	N	4000K	550	1100
	W	3000K	525	1050
SYSTEM EFFICIENCY	No. of LEDs		-	-
	Driver Rating		48V DC	48V DC
	UGR Rating		>9	>9
DIMENSIONS (in mm)	Diameter	Ø	50	50
	Height	H	73	73
	Adapter	L	185	185
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES: 5W,10W — 36°

COLOUR OPTIONS: Black



Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 K

MEGNETIC TRACK LIGHTS

Surface 3W

6W


Recessed


Hanging

			6W	3W
Wattage (W)				
LUMEN OUTPUT	N	4000K	600	300
	W	3000K	570	285
SYSTEM EFFICIENCY	No. of LEDs		-	-
	Driver Rating		48V DC	48V DC
	UGR Rating		>25	>25
DIMENSIONS (in mm)	Diameter	Ø	60	60
	Height	H	108	108
	Adapter	L	185	185
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES: 6W,3W — 100°

COLOUR OPTIONS: Black | White



Track Trimless

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

MARBUL PLUS

LFTL1124 L

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		8W	
LUMEN OUTPUT	N	4000K	800	
	W	3000K	760	
SYSTEM EFFICIENCY	No. of LEDs		-	
	Driver Rating		48V DC	
	UGR Rating		>9	>9
DIMENSIONS (in mm)	Diameter	Ø	100	100
	Height	H	97	97
	Adapter	L	185	185
	Hanging wire	L	1.5m	1.5m
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black | Champagne Gold

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

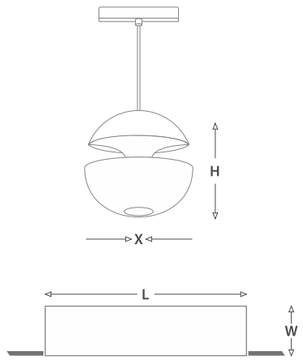

Track Trimless

MARBUL PLUS

LFTL1124 M

MEGNETIC TRACK LIGHTS

Surface


Recessed


Hanging

	Wattage (W)		8W	
LUMEN OUTPUT	N	4000K	800	
	W	3000K	760	
SYSTEM EFFICIENCY	No. of LEDs		-	
	Driver Rating		48V DC	
	UGR Rating		>11	
DIMENSIONS (in mm)	Diameter	Ø	85	
	Height	H	76	
	Adapter	L	115	
	Hanging wire	L	1.5m	
Recessed (Trimless)				
	Track Size	L	500 /1000 / 2000	
		W	67	
		H	54	
	Cutout	Ø	30	
Surface mounted / Pendant / Recessed				
	Track Size	L	500 /1000 / 2000	
		W	27 (23mm Inner width)	
		H	54	

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



COLOUR OPTIONS

Black

CRI	TEMP	IP RATING	INPUT
>80	0-45°	IP-20	48VDC

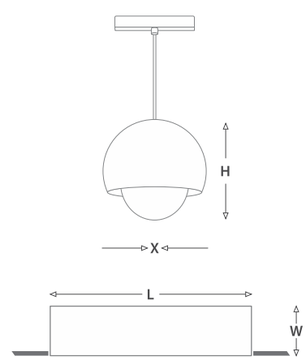

Track Trimless

MARBUL

LFTL931 A/B/C/D/E/K

MAGNETIC TRACK LIGHTS

DIMMABLE

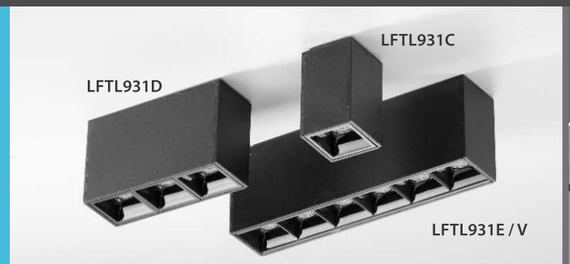



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

Wattage (W)		2W	6W	12W	18W NEW
LUMEN OUTPUT	N 4000K	150	450	900	1350
	W 3000K	140	420	840	1260
SYSTEM EFFICIENCY	No. of LEDs	1	3	6	6
	THD (%)	-	-	-	-
	Driver Rating (For 1 Spot)	24V DC 90mA	24V DC 250mA	24V DC 500mA	24V DC 750mA
DIMENSIONS (in mm)	Size L	34	94	165	323
	W	34	34	34	34
	Height H	56	56	56	56
	Track Size L	500 / 1000 / 2000			
	W	40			

SYSTEM SPECS Housing	Aluminum
LED Make	Osram
Driver Brand	Meanwell (External)

BEAM ANGLES 2W, 6W, 12W,18W

23°



Track (Recessed / Suspended)

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MARBUL

LFTL931 A/B/K/F/S/G

MAGNETIC TRACK LIGHTS

DIMMABLE



LFTL931 F/S/G



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

Wattage (W)		10W	20W	30W
LUMEN OUTPUT	N 4000K	750	1500	2250
	W 3000K	700	1400	2100
SYSTEM EFFICIENCY	No. of LEDs	24	48	72
	THD (%)	-	-	-
	Driver Rating (For 1 Spot)	24V DC 420mA	24V DC 850mA	24V DC 1250mA
DIMENSIONS (in mm)	Size L	320	640	960
	W	34	34	34
	Height H	56	56	56
	Track Size L	500 / 1000 / 2000		
	W	40		

SYSTEM SPECS Housing	Aluminum
LED Make	Bridgelux
Driver Brand	Meanwell (External)

BEAM ANGLES 10W, 20W, 30W

120°



Track (Recessed / Suspended)

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MARBUL

LFTL931 A/B/K/X

MAGNETIC TRACK LIGHTS

DIMMABLE

LFTL931 X



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

	Wattage (W)		15W
LUMEN OUTPUT	N	4000K	1386
	W	3000K	1300
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Driver Rating (For 1 Spot)		24V DC 625mA
DIMENSIONS (in mm)	Diameter	Ø	70
	Height	H	112
	Track Size	L	500 /1000 / 2000
		W	40

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES



Track (Recessed / Suspended)

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MARBUL

LFTL931 A/B/K/U

MAGNETIC TRACK LIGHTS

DIMMABLE

LFTL931 U



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

	Wattage (W)		6W
LUMEN OUTPUT	N	4000K	450
	W	3000K	420
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Driver Rating (For 1 Spot)		24V DC 250mA
DIMENSIONS (in mm)	Diameter	Ø	34
	Height	H	54
	Track Size	L	500 /1000 / 2000
		W	40

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Meanwell (External)

BEAM ANGLES





Track (Recessed / Suspended)

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MARBUL

LFTL931J,W

MAGNETIC TRACK LIGHTS

DIMMABLE

LFTL931 J/W



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

			Wattage (W)	12W	NEW 18W
LUMEN OUTPUT	N	4000K		900	1350
	W	3000K		840	1260
SYSTEM EFFICIENCY		No. of LEDs		6	6
		THD (%)		-	-
		Driver Rating (For 1 Spot)		24V DC 500mA	24V DC 750mA
DIMENSIONS (in mm)		Size	L	165	323
			W	34	34
		Height	H	182	182
		Track Size	L	500 /1000 / 2000	
			W	40	

SYSTEM SPECS		
	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (External)

BEAM ANGLES







Track (Recessed / Suspended)

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MARBUL

LFTL931T

MAGNETIC TRACK LIGHTS (WALLWASHER)

DIMMABLE

LFTL931 T



Recessed
LFTL931 A/B/K



Surface / Suspended
LFTL931 A/B/K

			Wattage (W)	12W
LUMEN OUTPUT	N	4000K		900
	W	3000K		840
SYSTEM EFFICIENCY		No. of LEDs		7
		THD (%)		-
		Driver Rating (For 1 Spot)		24V DC 500mA
DIMENSIONS (in mm)		Size	L	137
			W	34
		Height	H	57
		Track Size	L	500 /1000 / 2000
			W	40

SYSTEM SPECS		
	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Meanwell (Exeternal)





Track (Recessed / Suspended)

CRI	TEMP	IP RATING	INPUT
>80	0-50°	IP-20	24VDC

MERAKI

LFTL1123A

MAGNETIC PENDANT TRACK LIGHTS

	Wattage (W)		10W
LUMEN OUTPUT	N	4000K	975
	W	3000K	940
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	46
	Height	H	102
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	10W	24°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC



MERAKI

LFTL1123B

MAGNETIC PENDANT TRACK LIGHTS

	Wattage (W)		5W
LUMEN OUTPUT	N	4000K	595
	W	3000K	535
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	30
	Height	H	155
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	5W	80°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC



MERAKI

LFTL1123C

MAGNETIC PENDANT TRACK LIGHTS

48 V DC

Wattage (W)			5W
LUMEN OUTPUT	N	4000K	595
	W	3000K	535
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	100
	Height	H	140
Track Size		L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	5W	110°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



MERAKI

LFTL1123D

MAGNETIC PENDANT TRACK LIGHTS



Wattage (W)			5W
LUMEN OUTPUT	N	4000K	595
	W	3000K	535
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	100
	Height	H	Adjustable
Track Size		L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	5W	110°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



MERAKI

LFTL1123E

MAGNETIC PENDANT TRACK LIGHTS

Wattage (W)			10W
LUMEN OUTPUT	N	4000K	1185
	W	3000K	1120
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Diameter	X	101
	Height	H	18
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	10W	120°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)



MERAKI

LFTL1123F

MAGNETIC PENDANT TRACK LIGHTS

Wattage (W)			10W
LUMEN OUTPUT	N	4000K	1185
	W	3000K	1120
SYSTEM EFFICIENCY	No. of LEDs		SMD
	THD (%)		-
	Driver Rating		24V DC
DIMENSIONS (in mm)	Size	L	319
		W	55
	Height	H	34
	Track Size	L	1000 /1500 / 2000
		W	12
		H	10.6

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Lafit
BEAM ANGLES	10W	120°
COLOUR OPTIONS	Outer-Body	Champagne Gold

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	24VDC

Track (Suspended)





Project: Surve's Restaurant
(Pune)

Project: Miraj Cinema
(Dombivali)

Project: bungalow bhuj kutch

LAFIT

Track Lights

FUNNEL

LFTL1079A,B

TRACK LIGHT

ANTI - GLARE

TILTABLE

Honeycomb

Snoot



Barn door

Accessories

LFSL1079A,B

LFSS1079A,B

	Wattage (W)	12W	18W	30W
LUMEN OUTPUT	N 4000K	1336	1986	3128
	W 3000K	1262	1881	2924
SYSTEM EFFICIENCY	No. of LEDs	1	1	1
	THD (%)	20	20	15
	Power Factor	>0.9	>0.9	>0.95
	Driver Rating	36V DC 300mA	36V DC 400mA	36V DC 750mA
DIMENSIONS (in mm)	Lamp Diameter Ø	81	81	92
	Height H	81	81	92
	Total Width W	185	185	195
	Height H	205	205	223

SYSTEM SPECS	
Housing	Aluminum
LED Make	Cree
Driver Brand	BAG

BEAM ANGLES: 15° 23° 30° 45° 60°

COLOUR OPTIONS: White | Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



FUNNEL

LFSS1079A,B

SURFACE SPOT LIGHT

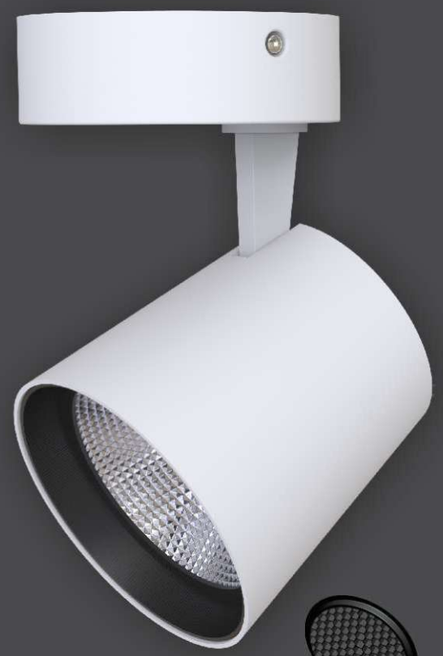

ANTI - GLARE

TILTABLE



Honeycomb

Snoot

Barn door

Accessories

LFTL1079A,B

LFSL1079A,B

	Wattage (W)	12W	18W	30W
LUMEN OUTPUT	N 4000K	1336	1986	3128
	W 3000K	1262	1881	2924
SYSTEM EFFICIENCY	No. of LEDs	1	1	1
	THD (%)	20	20	15
	Power Factor	>0.9	>0.9	>0.95
	Driver Rating	36V DC 300mA	36V DC 400mA	36V DC 750mA
DIMENSIONS (in mm)	Lamp			
	Diameter Ø	81	81	92
	Height H	81	81	92
	Total			
	Width W	110	110	137
	Height H	150	150	165

SYSTEM SPECS		
	Housing	Aluminum
	LED Make	Cree
	Driver Brand	BAG

BEAM ANGLES: 15° 23° 30° 45° 60°

COLOUR OPTIONS: White | Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



FUNNEL

LFSL1079A,B

SPOT LIGHT

ANTI - GLARE

TILTABLE

Honeycomb

Snoot



Barn door

Accessories

LFTL1079A,B

LFSS1079A,B

	Wattage (W)	12W	18W	30W
LUMEN OUTPUT	N 4000K	1336	1986	3128
	W 3000K	1262	1881	2924
SYSTEM EFFICIENCY	No. of LEDs	1	1	1
	THD (%)	20	20	15
	Power Factor	>0.9	>0.9	>0.95
	Driver Rating	36V DC 300mA	36V DC 400mA	36V DC 750mA
DIMENSIONS (in mm)	Lamp			
	Diameter Ø	81	81	92
	Height H	81	81	92
	Total			
	Width W	100	100	100
	Height H	140	140	150
	Cutout Ø	90	90	90

SYSTEM SPECS		
	Housing	Aluminum
	LED Make	Cree
	Driver Brand	BAG

BEAM ANGLES: 15° 23° 30° 45° 60°

COLOUR OPTIONS: White | Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



Surface Lights

BEACON

LFSS1043A, B

SURFACE CEILING LIGHTS

LFSS1043A

LFSS1043B

		LFSS1043A	LFSS1043B
	Wattage (W)	7W	7W
LUMEN OUTPUT	N 4000K	613	613
	W 3000K	570	570
SYSTEM EFFICIENCY	No. of LEDs	3	3
	THD (%)	-	-
	Power Factor	-	-
	Driver Rating	18-30VDC 200mA	18-30VDC 200mA
DIMENSIONS (in mm)	Diameter L	105	105
	W	38	38
	Height H	64	104

SYSTEM SPEC	Housing	Aluminum
	LED Make	Bridgelux
	Driver Brand	Lafit

BEAM ANGLES

COLOUR OPTIONS: White | Black



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

LAFIT

Pendant Lights

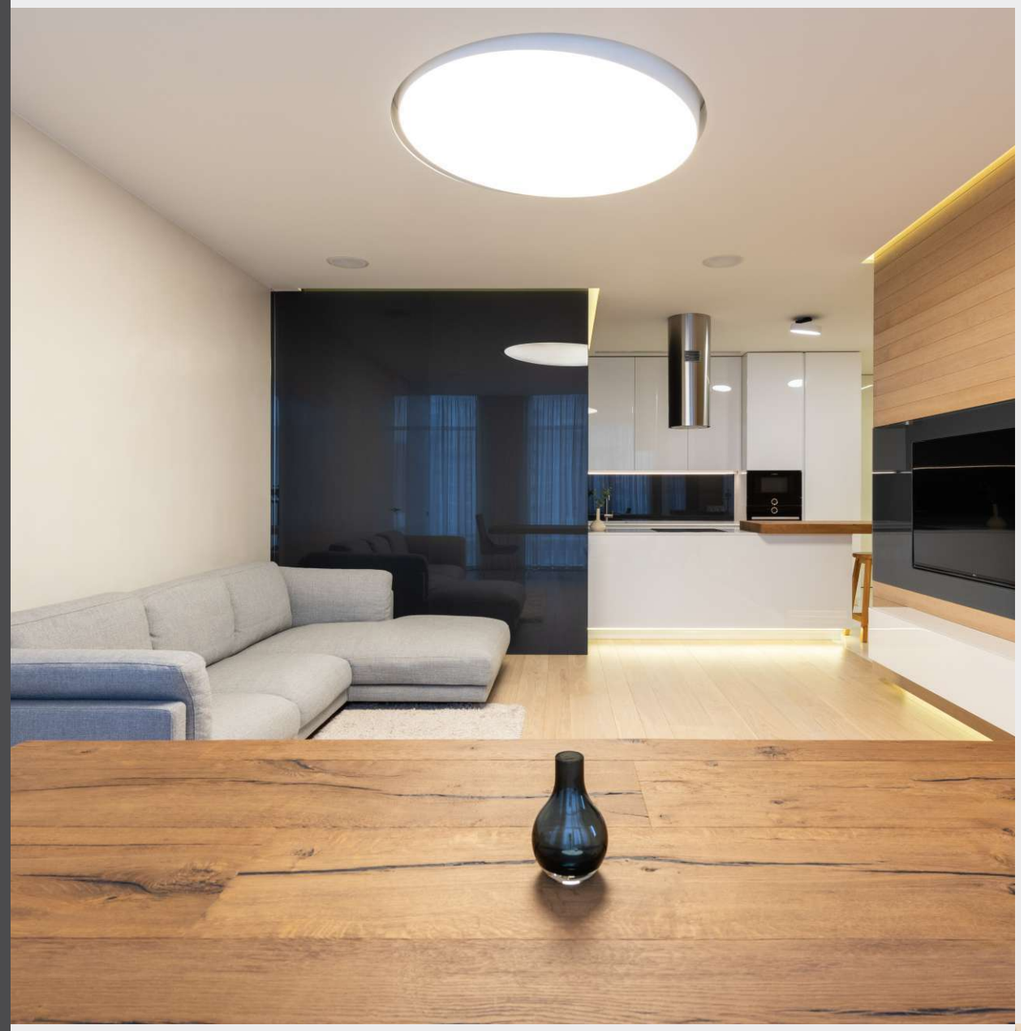

LIGHTBAR

LFSL1080A,B

OFFICE LIGHT

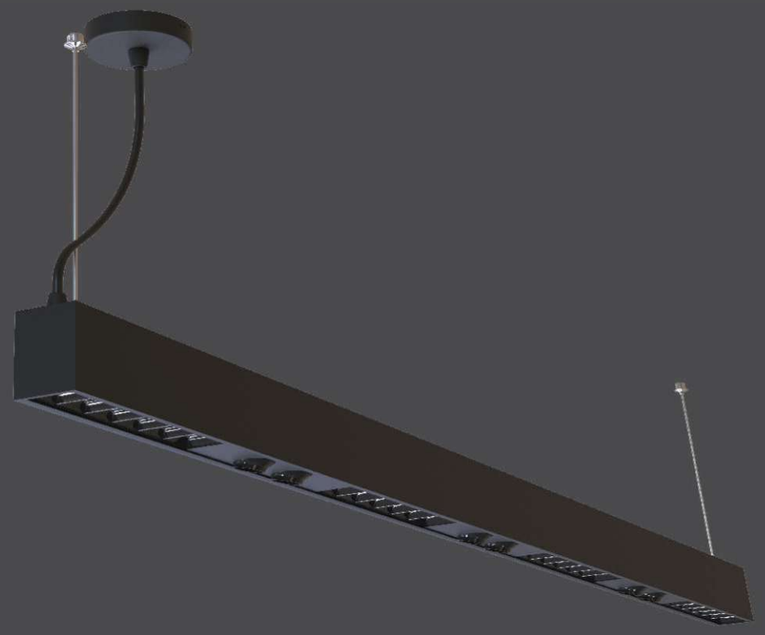

UP & DOWN

Wattage (W)		TOTAL - 56W UP - 12W DOWN - 20W(SMD) 24W(COB)
LUMEN OUTPUT	N 4000K	TOTAL - 4648lm UP - 960lm (SMD) DOWN - 1752lm (SMD) 1936lm (COB)
SYSTEM EFFICIENCY	No. of LEDs	-
	THD (%)	20
	Power Factor	>0.9
	Driver Rating	30-45V DC 800mA (UP & DOWN SMD) 30-40V DC 450mA (DOWN COB)
DIMENSIONS (in mm)	Length L	1120
	Width W	40
	Height H	85

SYSTEM SPECS	Housing	Aluminum
	LED Make	UP (SMD) - Bridgelux DOWN (SMD) - Osram DOWN (COB) - Bridgelux
	Driver Brand	LAFIT

BEAM ANGLES

UP	DOWN
34°	100°

COLOUR OPTIONS: White | **Black**



CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ZODIAC

LFXPL1089R

MAGNETIC PENDANT LIGHT

ANTI - GLARE

Compatible with LFXPL1089A

Wattage (W)		Empty Fixture			6W
LUMEN OUTPUT	C 5000K	NA	NA	NA	660
	N 4000K	NA	NA	NA	620
	W 3000K	NA	NA	NA	610
SYSTEM EFFICIENCY	No. of LEDs	NA	NA	NA	1
	THD (%)	<20	<20	<20	-
	Power Factor	-	0.95	0.95	-
	Driver Rating	12V DC 35W Inbuilt	12V DC 60W Inbuilt	12V DC 60W Inbuilt	-
DIMENSIONS (in mm)	Diameter X	600	900	1200	53(L)
	Height H	31	31	31	25(W)
	Wire Length L	1800	1800	1800	56(H)
	Cutout Ø	NA	NA	NA	NA

SYSTEM SPECS	Housing	Aluminium
	LED Make	Bridgelux
	Driver Brand	Meanwell

BEAM ANGLES: 6W — 40°

COLOUR OPTIONS: **Black**



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

ORBIT

LFXPL1088R

PENDANT LIGHT

SWITCH TUNEABLE

ANTI - GLARE

	Wattage (W)	25W	36W	50W
LUMEN OUTPUT	N 4000K	1512	2332	2976
	W 3000K	1466	2216	2821
SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD	SMD
	THD (%)	<15	<15	<15
	Power Factor	0.9	0.9	0.9
	Driver Rating	25-42V DC 600mA	25-42V DC 900mA	25-50V DC 1200mA
	Surge	1kV	1kV	1kV
DIMENSIONS (in mm)	Diameter X	600	900	1200
	Height H	31	31	31
	Wire Length L	1500	1800	1800
	Cutout Ø	NA	NA	NA

SYSTEM SPECS	
Housing	Aluminium
LED Make	Osram
Driver Brand	Lafit
Dimming	Switch Tunable

BEAM ANGLES: 25W,36W,50W — 175°

COLOUR OPTIONS: White



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

LUNAR

LFXPL1087R

PENDANT LIGHT

SWITCH TUNEABLE

ANTI - GLARE

	Wattage (W)	30W	38W
LUMEN OUTPUT	N 4000K	2778	4911
	W 3000K	2766	4541
SYSTEM EFFICIENCY	No. of LEDs	SMD	SMD
	THD (%)	<15	<15
	Power Factor	0.9	0.9
	Driver Rating	25-42V DC 600mA	25-42V DC 900mA
	Surge	1kV	1kV
DIMENSIONS (in mm)	Diameter X	380	600
	Height H	38	38
	Wire Lenght L	1500	1500

SYSTEM SPECS	
Housing	Steel
LED Make	Osram
Driver Brand	Lafit
Dimming	Switch Tunable

BEAM ANGLES: 10W — 85°

COLOUR OPTIONS: White



CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz

Indoor Lights

CANEL

LFIF1082X

INDOOR FIXTURE

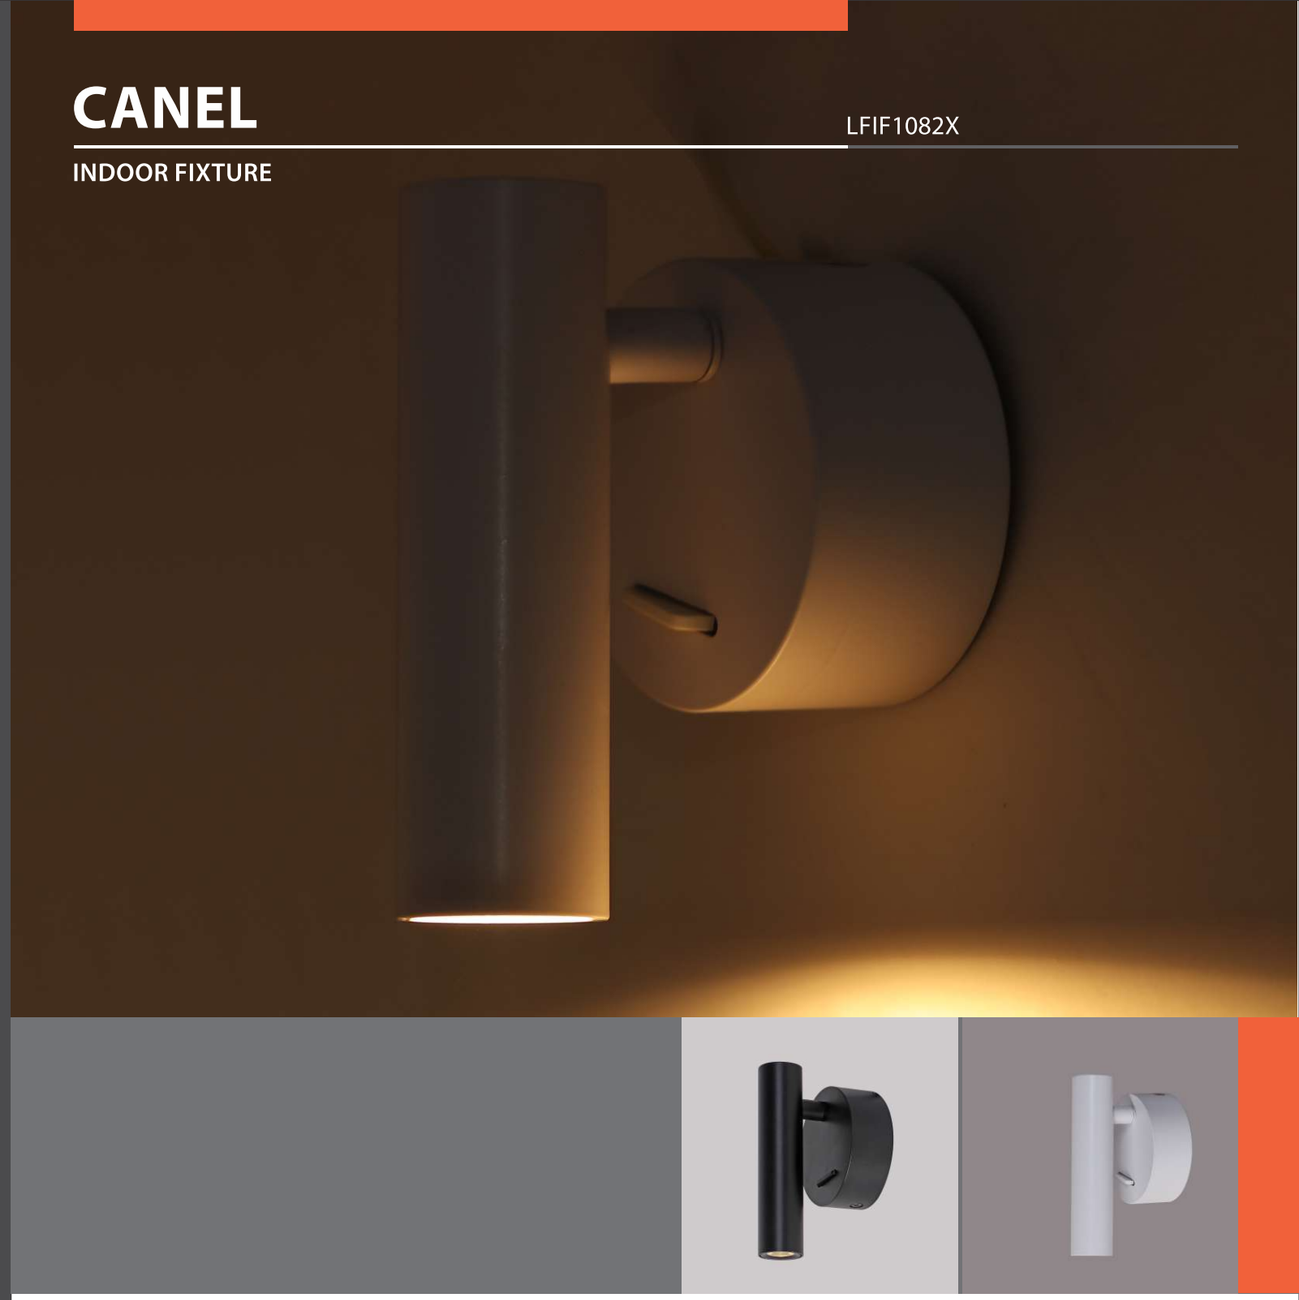

	Wattage (W)	3W
LUMEN OUTPUT	W 3000K	255
SYSTEM EFFICIENCY	No. of LEDs	1
	THD (%)	-
	Power Factor	0.5
	Driver Rating	2-4V DC 600mA
DIMENSIONS (in mm)	Diameter X	29
	Height H	125
		160(With Junction Box)

SYSTEM SPECS	Housing	Aluminum
	LED Make	Cree
	Driver Brand	Allooking

BEAM ANGLES: 3W (UP & DOWN) — 90°

COLOUR OPTIONS: Housing — White | Black

CRI	TEMP	IP RATING	INPUT
80	0-50°	IP-20	240V/ 50Hz



ARCHER

LFSL1085R

RECESSED FOOT LIGHT



	Wattage (W)		1W
LUMEN OUTPUT	W	3000K	106
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Power Factor		-
	Driver Rating		3V DC 650mA
DIMENSIONS (in mm)	Diameter	X	25
	Height	H	35 (Standard)
	Cutout	Ø	20

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Lafit

BEAM ANGLES

1W

15°

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

ORIEL

LFSL1086R

RECESSED FOOT LIGHT

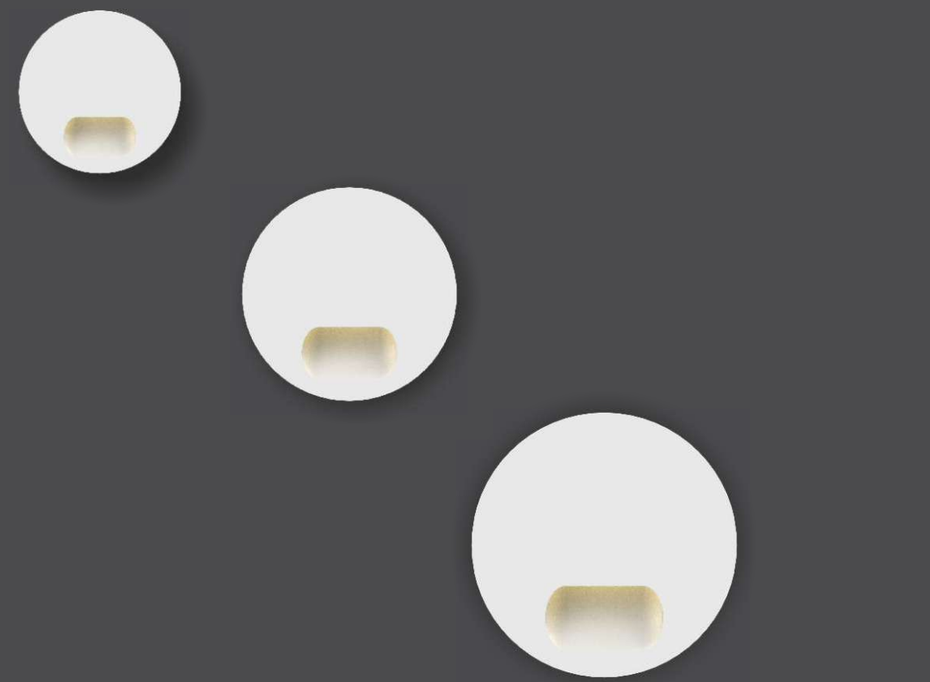



	Wattage (W)		3W
LUMEN OUTPUT	W	3000K	206
SYSTEM EFFICIENCY	No. of LEDs		1
	THD (%)		-
	Power Factor		-
	Driver Rating		3V DC 650mA
DIMENSIONS (in mm)	Diameter	X	45
	Height	H	26
	Cutout	Ø	35

SYSTEM SPECS	Housing	Aluminum
	LED Make	Osram
	Driver Brand	Lafit

BEAM ANGLES

3W

30°

CRI	TEMP	IP RATING	INPUT
90	0-50°	IP-20	240V/ 50Hz

LAFIT

COB STRIP LIGHT

LASSO

LFFS1121 / LFFW1121

COB Flexible Strip Light / Cove Light

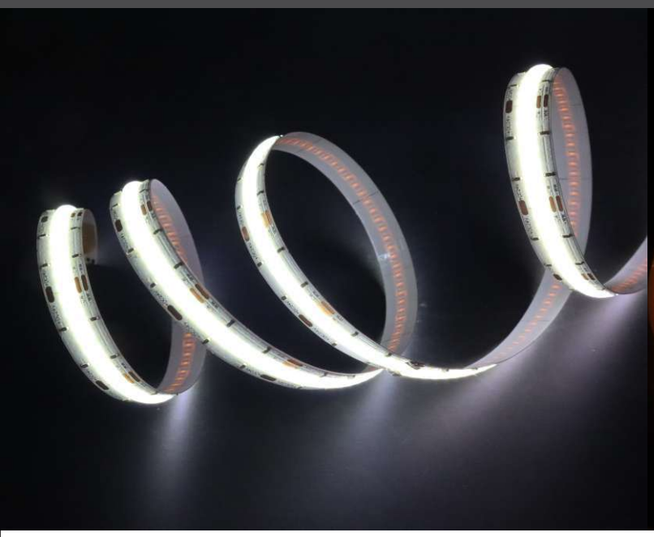

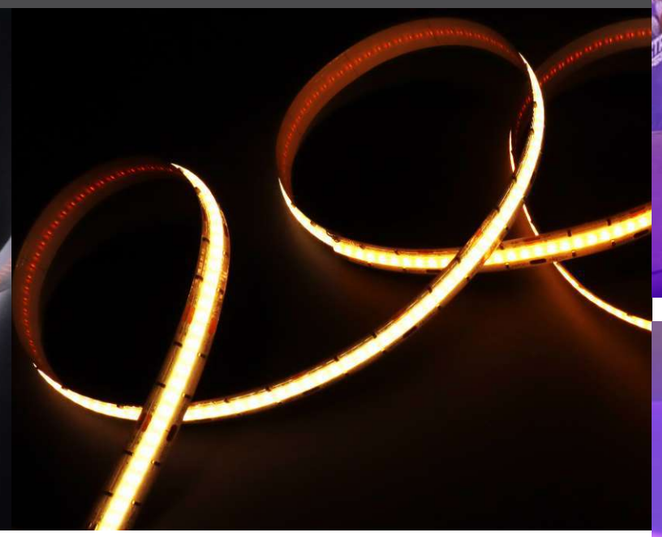

Product Code	Description (per meter)	Wattage (per mtr).	Input Voltage	Colour Temperature	LED Make	Lumens Efficacy (per Watt)	IP Rating	Indoor / Outdoor	Strip Width (in mm)	Role Length	Material
LFFS1121X	480 Pcs (ULTRA SLIM)	5W	24VDC	6500k,4000k,3000k	Epistar	100 lm	IP-20	Indoor	5	5 Mtr	Base of Strip : Copper
LFFS1121X	504 Pcs	12W	24VDC	6500k,4000k,3000k, 2700k	Epistar	90 lm	IP-20	Indoor	10	5 Mtr	Base of Strip : Copper
LFFS1121X	528 Pcs	15W	24VDC	6500k,4000k,3000k	Epistar	100 lm	IP-20	Indoor	10	5 Mtr	Base of Strip : Copper
LFFS1121X	640 Pcs	16W	24VDC	(Tunable) 2700K-6500K 1800K-3000K	Epistar	90 lm	IP-20	Indoor	10	5 Mtr	Base of Strip : Copper
LFFW1121H	504 Pcs	12W	24VDC	3000k	Epistar	90 lm	IP-65 (Hollow Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFFW1121H	528 Pcs	15W	24VDC	3000k	Epistar	100 lm	IP-65 (Hollow Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFFW1121H	640 Pcs	16W	24VDC	(Tunable) 2700k-6500k	Epistar	90 lm	IP-65 (Hollow Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFFW1121S	528 Pcs	15W	24VDC	3000k	Epistar	100 lm	IP-67 (Solid Silicon)	Outdoor	12	5 Mtr	Base of Strip : Copper
LFAC1121A	NA	Straight Joiner	24VDC	Strip to strip without wire	NA	NA	IP-20	Indoor	10	NA	NA
LFAC1121C	NA	Power Connector	24VDC	With wire on one end	NA	NA	IP-20	Indoor	10	NA	NA
LFAC1121D	NA	Flexible Joiner	24VDC	With connectors on both end	NA	NA	IP-20	Indoor	10	NA	NA
LFAC1121L	NA	L Connector	24VDC	6500k,4000k,3000k	Epistar	NA	IP-20	Indoor	10	NA	NA
LFAC1121X	NA	X Connector	24VDC	6500k,4000k,3000k	Epistar	NA	IP-20	Indoor	10	NA	NA
LFAC1121T	NA	T Connector	24VDC	6500k,4000k,3000k	Epistar	NA	IP-20	Indoor	10	NA	NA

CRI	TEMP	BEAM
80	0-45°	170°

Project: gamex prozone mall (Aurangabad)

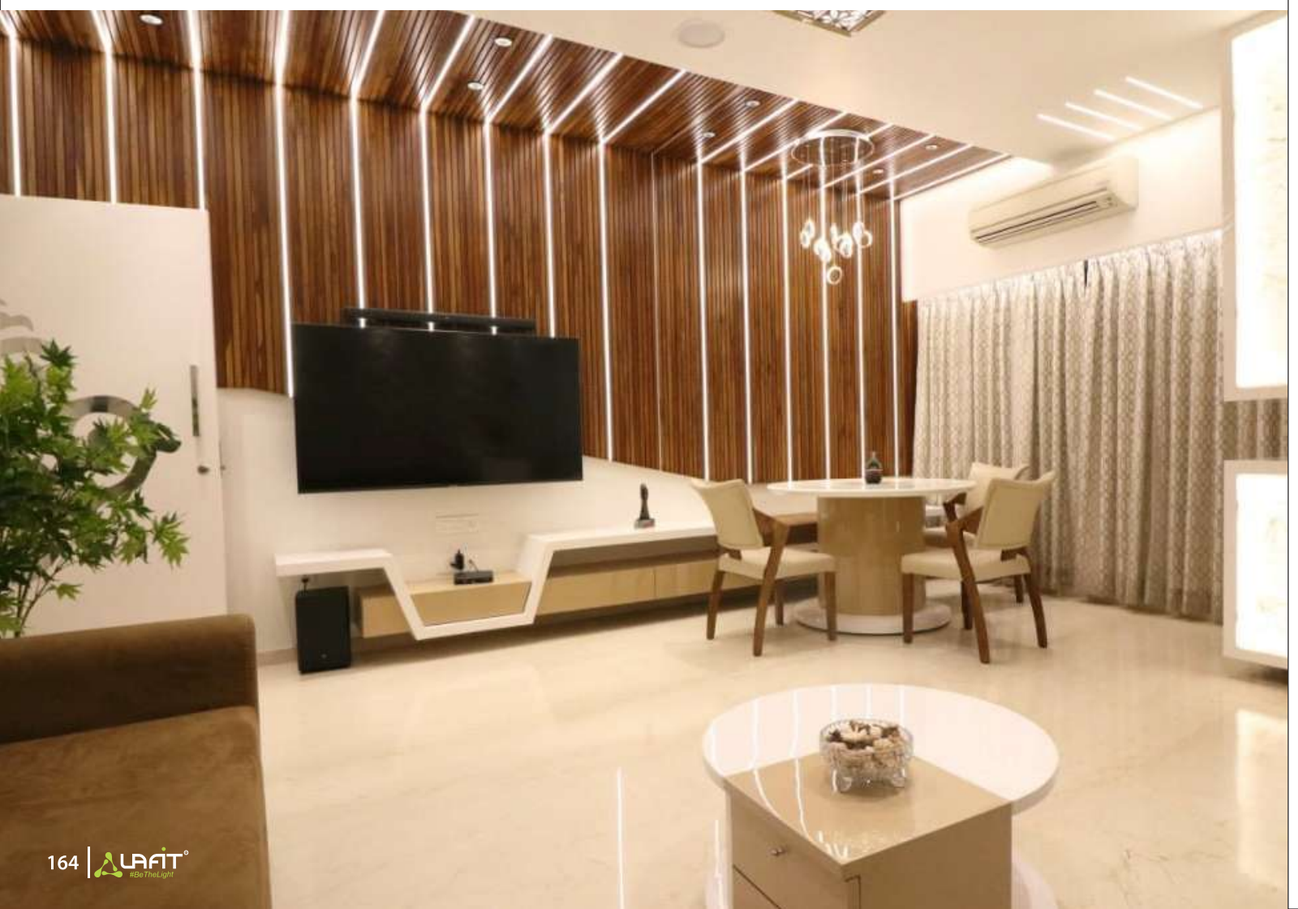

LAFIT® #BeTheLight

Notes:

Notes:

The Brillo Series

LAFIT®
#BeTheLight

Architectural Lighting Solutions

Lafit Lighting Pvt Ltd
Experience Centre
Unit 2B, Block No 7, Opp Todi Estate
New Sunmill Compound, Sitaram Jadhav Marg,
Lower Parel (W), Mumbai - 400013

Customer Care : customercare@lafitlighting.com
/+91 8879665865
Enquiry : contact@lafitlighting.com
/+91 8879665864

FOLLOW US ON

www.lafitlighting.com