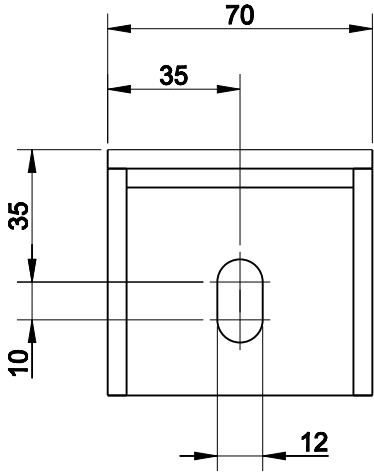
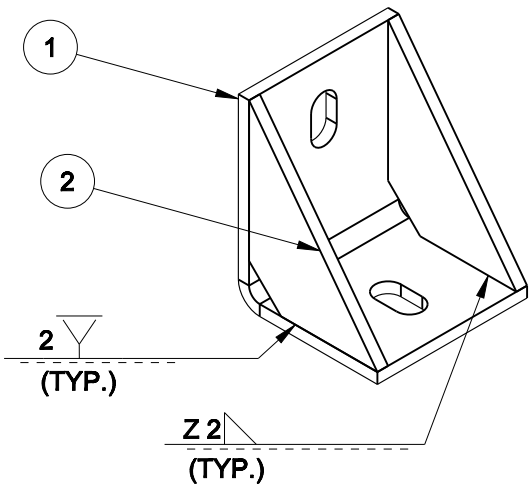
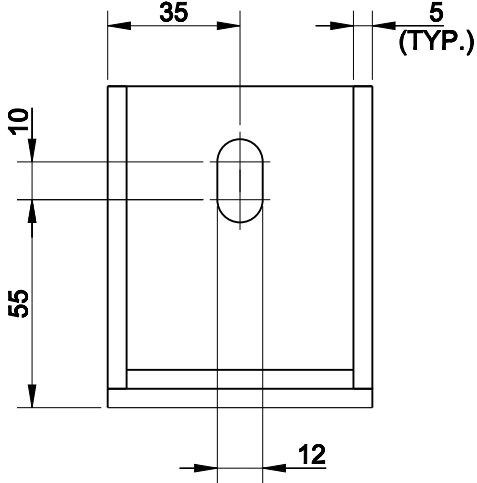
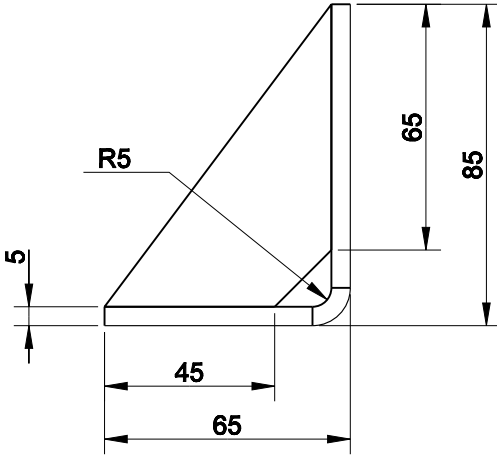


1	2	3	4
			
			
NOTES: - 1. BREAK ALL SHARP EDGES AND BURRS. 2. UNSPECIFIED TOL. AS PER IS: 2102-m. 3. WELDING SHOULD BE OF GOOD QUALITY. 4. WELDING SHOULD BE FREE FROM DEFECTS, BLOW HOLES, POROSITY, DISTORTION, SLAG AND INCLUSIONS. 5. NO SPATTER ACCEPTED ON THE PART. 6. SUR. TREAT.- Fe/Zn 12.5 MIN. THK. BLACK PASSIVATION, AS PER IS: 1573.			
2 WEDGE PIECE		2 1S100000668-2 E250A-IS:2062	
1 BENT PLATE		1 1S100000668-1 E250A-IS:2062	
S.NO.	DESCRIPTION	QTY	PART NO.
Alt.	Amendments	Name Sign Date	Alt.
Sur.Sym.	N1 N2 N3 N4 N5 N6 N7 N8 N9 N10 N11 N12	Mat.- SEE NOTES	
Ra Value(μm)	0.025 0.05 0.1 0.2 0.4 0.8 1.6 3.2 6.3 12.5 25 50	Sur. Treat.- SEE NOTES	
IS:3073	REF. NO.:-	Size -	Wt. 0.55 kg. Appx.
Gen. Tol. : IS-2102		Name	Sign. Date
Fine Med. Coar. Very Coar.	Name	Sign.	Date
0.5-3 ±0.05 ±0.1 ±0.2 --	Drawn	Prateek	PS 07-07-20
>3-6 ±0.05 ±0.1 ±0.3 ±0.5	Checked	Siva Karthik	CVK 13-07-20
>6-30 ±0.10 ±0.2 ±0.5 ±1.0	Approved	Bhaskara Rao K	KBR 14-07-20
>30-120 ±0.15 ±0.3 ±0.8 ±1.5	Title		Scale
>120-400 ±0.2 ±0.5 ±1.2 ±2.5	MOUNTING BRACKET FOR DOOR FRAME		1:2
>400-1000 ±0.3 ±0.8 ±2.0 ±4.0	Project :-		Drawing No.
>1000-2000 ±0.5 ±1.2 ±3.0 ±6.0	LHB PLUG DOOR		1S100000668
>2000-4000 - ±2.0 ±4.0 ±8.0	Sheet 1 of 1		Alt No. 00
Status: RELEASED			
1	2	3	4