




5	CHAIN	1	1C101020003-5	IS:2062 E250 A														
4	CLIP	1	1C101020003-4	IS:2062 E250 A														
3	SPRING DOWEL (Ø4.4x10)	1	1C101020003-3	ISO 8752 / DIN1481														
2	PLATE	1	1C101020003-2	SS-304														
1	LOCKING PIN	1	1C101020003-1	817M40 TO BS -970 (EN-24)	HARDENED & TEMPERED: 35-40 HRC													
ITEM	DESCRIPTION	QTY.	DRG. NO.	MATERIAL	REMARKS													
02	DRAWING UPDATED FOR SONA TRACEABILITY																	
01	DESIGN UPDATED AS PER ECN NO. RED-RD-CS-011-ECN-04-24					HARENDER KEENA	HSK	20.08.24										
Alt.	Amendments					Name	Sign	Date	Alt.	Amendments					Name	Sign	Date	
Sur.Sym.	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	Mat.-	SEE TABLE				
Ra Value (µm)	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50	Sur. Treat.-	SEE NOTES				
IS:3073	REF. NO.:-												-	Size -	-	Wt.	0.6	kg. Appx.
Gen. Tol. : IS-2102														Drawn Checked Approved Title H . DHYANI P. K. SONI H.S. KEENA LOCKING PIN ASSEMBLY 02.07.24 02.07.24 03.07.24 Scale 1:1 Dimensions in mm SONA COMSTAR SONA BLW Precision Forgings Limited Railway Business Plot No. 114-115, Sector-24, Faridabad-121005 Drawing No. 1C101020003 Sheet 1 OF 2 Alt No. 02 Status: Draft Drawing				
	Fine	Med.	Coar.	Very Coar.														
0.5-3	±0.05	±0.1	±0.2	--														
>3-6	±0.05	±0.1	±0.3	±0.5														
>6-30	±0.10	±0.2	±0.5	±1.0														
>30-120	±0.15	±0.3	±0.8	±1.5														
>120-400	±0.2	±0.5	±1.2	±2.5														
>400-1000	±0.3	±0.8	±2.0	±4.0														
>1000-2000	±0.5	±1.2	±3.0	±6.0														
>2000-4000	-	±2.0	±4.0	±8.0														
Project :-																		
AAR-H COUPLER																		

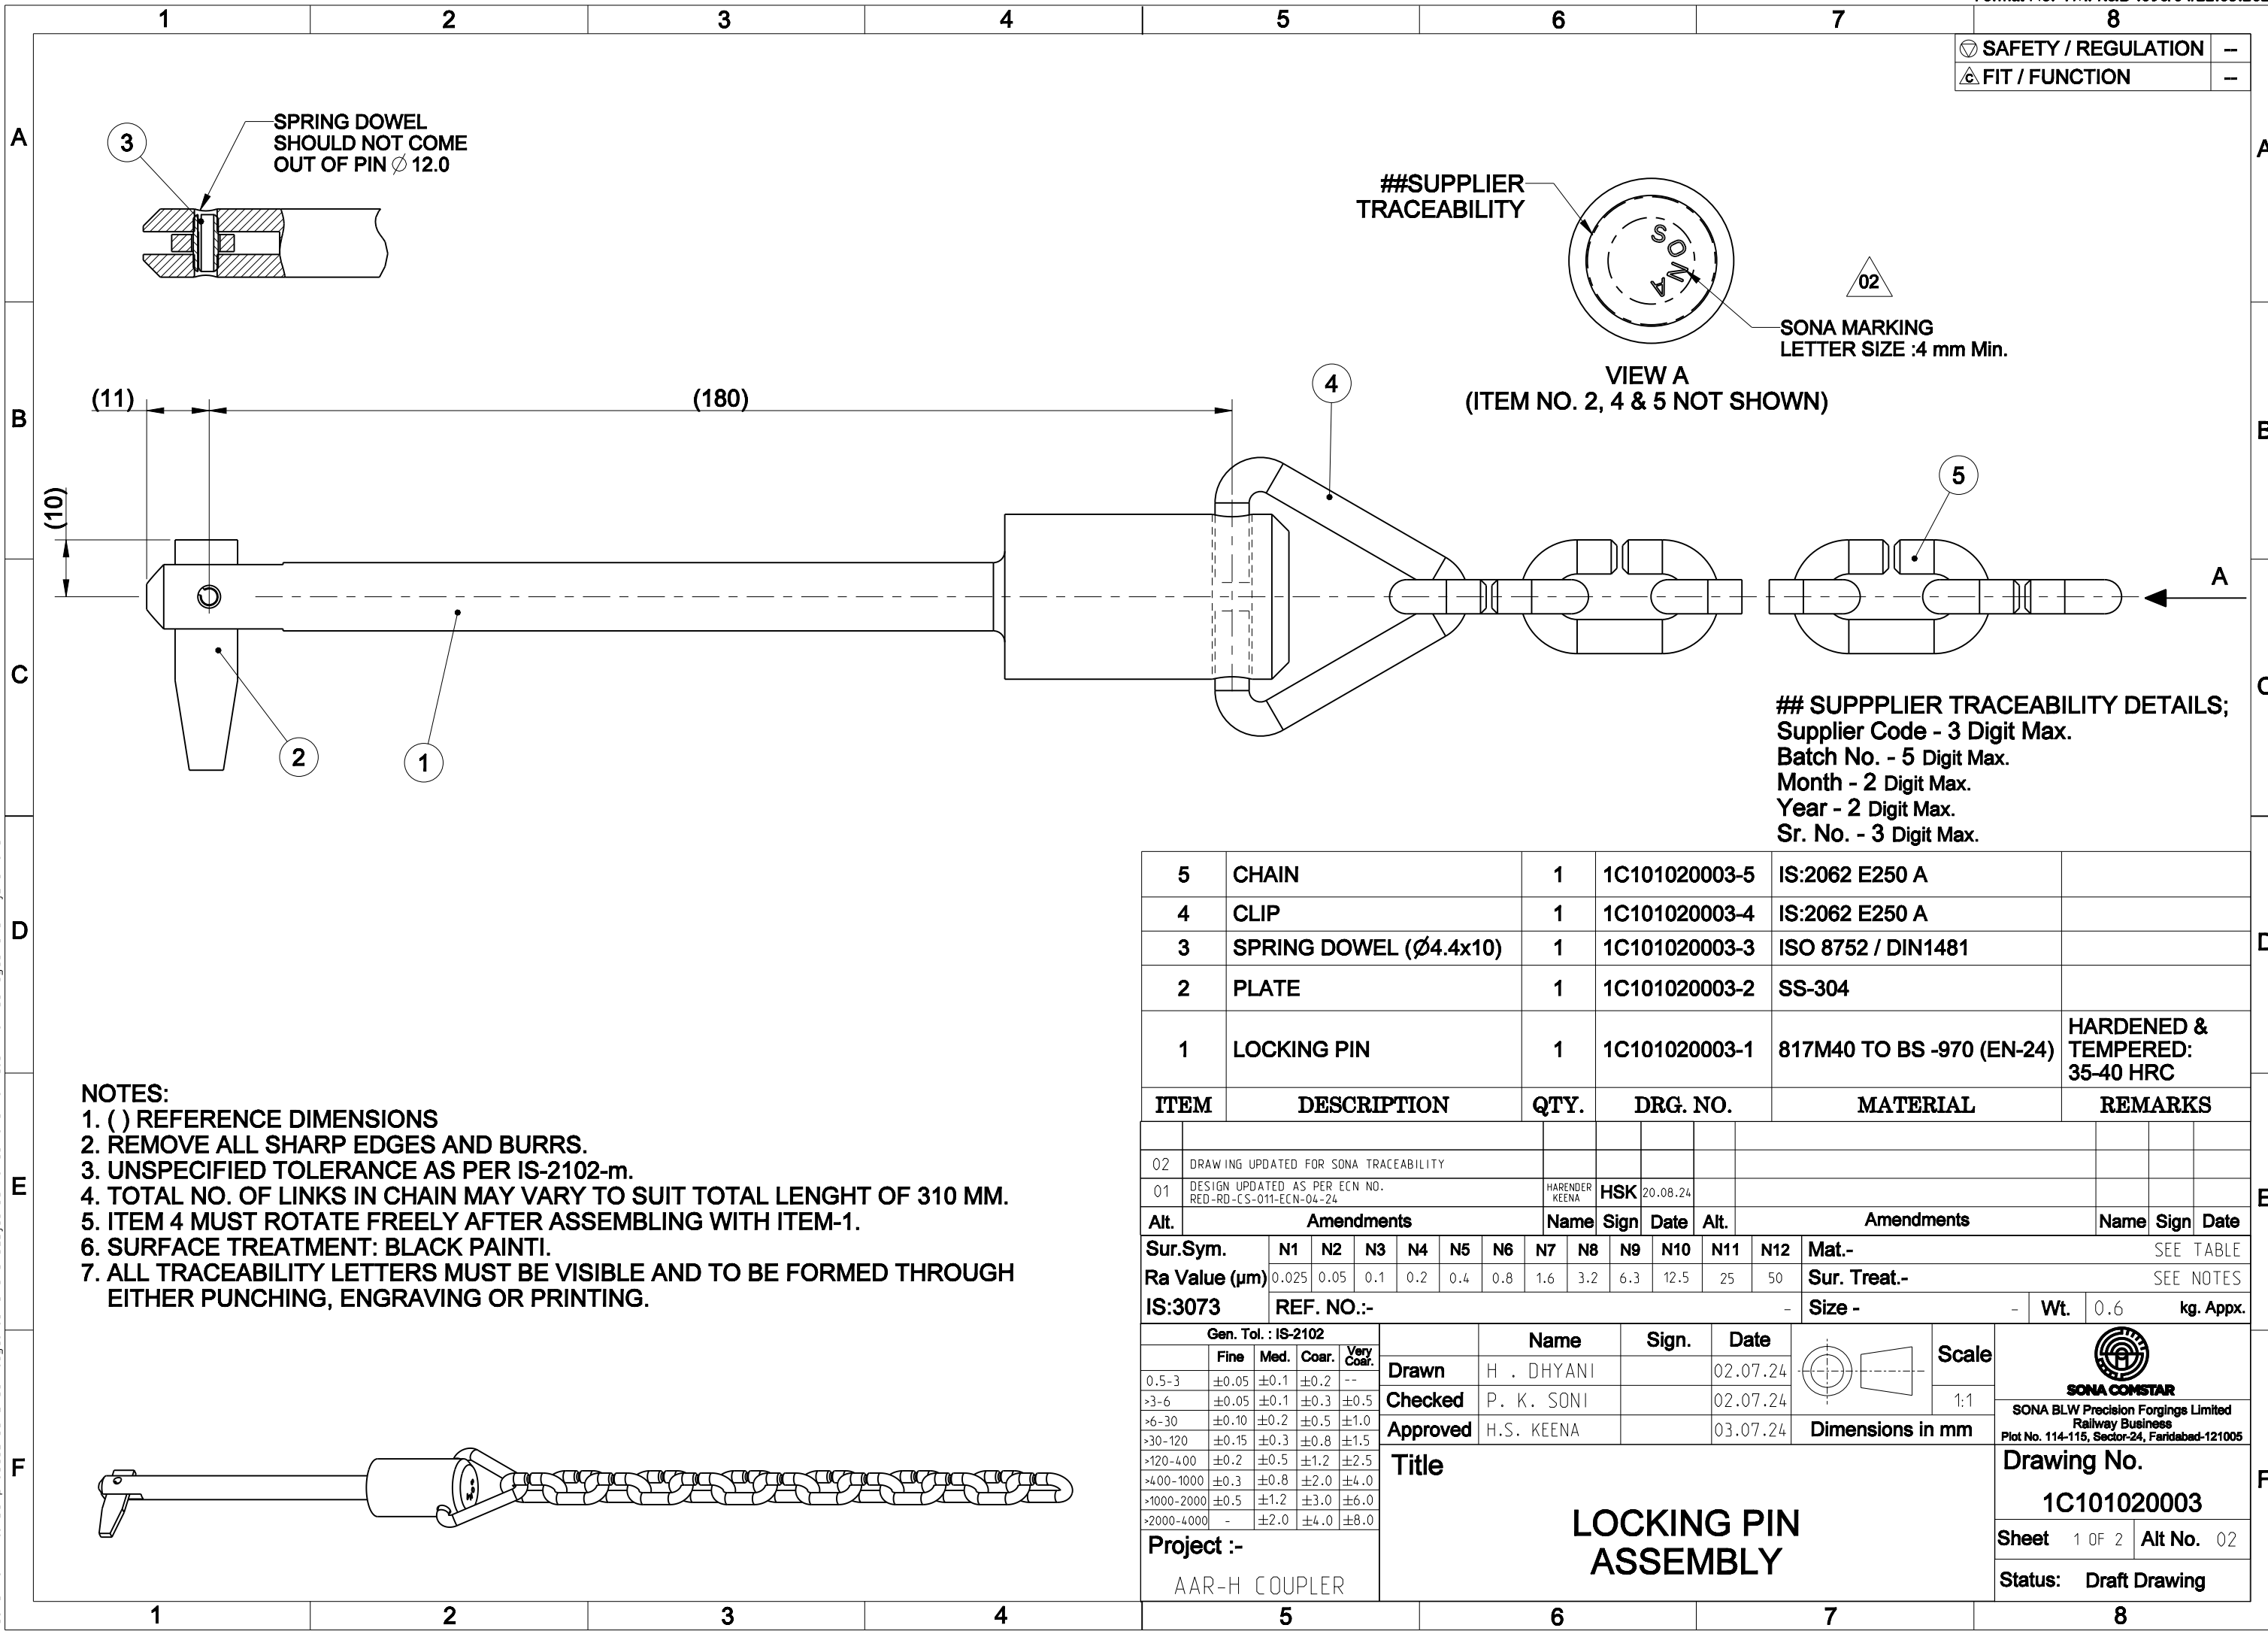