


HН

1. BREAK ALL SHARP EDGES AND BURRS.
2. () - FOR REFERENCE ONLY.
3. UNSPECIFIED TOL. ON MACHINING DIMS. AS PER EN ISO 13920 CLASS B.
4. WELDING SHOULD BE OF GOOD QUALITY.
5. WELDING SHOULD BE FREE FROM DEFECTS, BLOW HOLES, POROSITY, DISTORTION, SLAG AND INCLUSIONS.
6. NO SPATTER ACCEPTED ON THE PART.
7. SUR. TREAT.: - POWDER COATED WITH SIGNAL BLACK COLOR (RAL 9004), WITH MIN. THK. OF 40µm, EXCEPT THE * MARKED AREA & THREADED PORTION.

[illegible]

The present drawing is the intellectual property of ESCORTS LIMITED, RAILWAY EQUIPMENT DIVISION, contains confidential information. It must not be photocopied, scanned, photographed or copied either wholly or in part, or made accessible, disclosed over to any third party or unauthorised party without the prior express written agreement of ESCORTS LIMITED, RAILWAY EQUIPMENT DIVISION. Any breach of this condition will be prosecuted under legal laws and subjected to actions for claim of damages and injunctions.

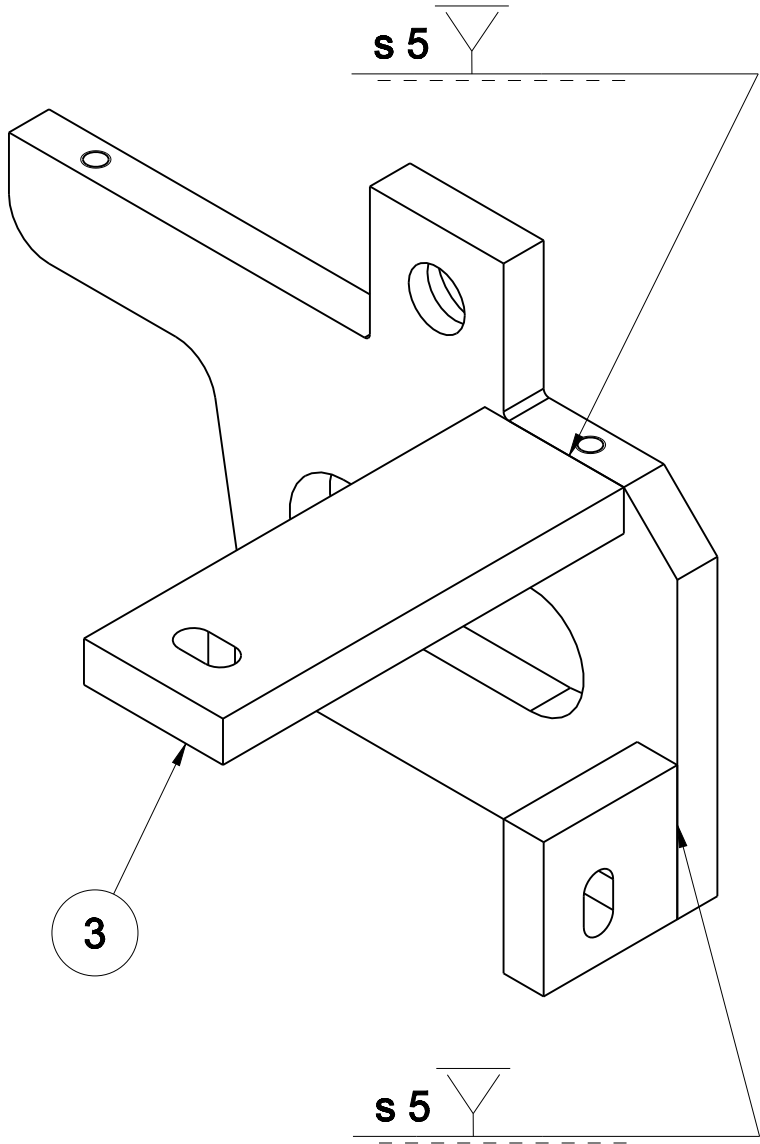