

	1	2	3	4
A				
B				
C				
D				
E				
F				

The drawing shows a mechanical part with the following dimensions and features:

- Front View:**
 - Top width: 20
 - Top thickness: 5
 - Top section width: 29
 - Overall height: 119
 - Intermediate section width: 56
 - Bottom section width: 23.6
 - Bottom radius: R30
 - Bottom angle: 29.5°
 - Internal features: R5 TYP, 2XR2, 4XR10
 - Section line: B-B
- Section View (SECTION):**
 - Top width: 95
 - Top thickness: 30
 - Intermediate section width: 48
 - Bottom section width: 72
 - Internal diameters: Ø30, Ø25


MATERIAL:-
LM 25 T6 AS PER BS 1490: 1988.

NOTES:-

1. ALL CASTING DIMENSIONS TO BE MAINTAINED & MEASURED.
2. UNSPECIFIED DRAFT ANGLE 2 MAX.
3. UNSPECIFIED RADII R2 MAX.
4. CASTING SHOULD BE SHOT BLASTED AND FREE FROM BURRS & SHARP EDGES.
5. CASTING SHOULD BE OF GOOD QUALITY, UNIFORM & SOUND.
6. CASTING SHOULD BE FREE FROM POROSITY, BLOW HOLES, HARD SPOTS, CRACKS, HOT TEARS, COLD SHUTS, DISTORTION, SAND AND SLAG INCLUSIONS AND OTHER HARMFUL DEFECTS.
7. UNSPECIFIED DIMS. TO BE TAKEN FROM SOLID MODEL AND ASK IF IN DOUBT.
8. UNSPECIFIED TOL. ON DIMS. AS PER ISO 8062-4 2023.

	1	2	3	4
1				
2				
3				
4				

Technical drawing of a mechanical part, likely a bracket or support. The drawing shows a side view with a vertical section and a horizontal section. A dimension of 9 is indicated for the vertical section, and a dimension of 20 is indicated for the horizontal section. A dashed line indicates a hidden internal feature.

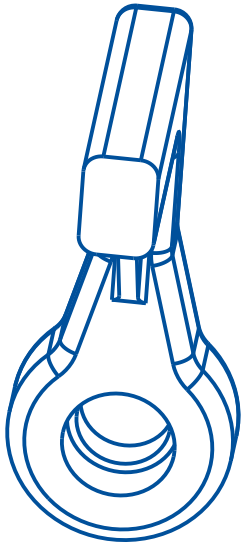

ISOMETRIC VIEW

SECTION B-B

MATERIAL:-
LM 25 T6 AS PER BS 1490: 1988.

NOTES:-

1. ALL CASTING DIMENSIONS TO BE MAINTAINED & MEASURED.
2. UNSPECIFIED DRAFT ANGLE 2 MAX.
3. UNSPECIFIED RADII R2 MAX.
4. CASTING SHOULD BE SHOT BLASTED AND FREE FROM BURRS & SHARP EDGES.
5. CASTING SHOULD BE OF GOOD QUALITY, UNIFORM & SOUND.
6. CASTING SHOULD BE FREE FROM POROSITY, BLOW HOLES, HARD SPOTS, CRACKS, HOT TEARS, COLD SHUTS, DISTORTION, SAND AND SLAG INCLUSIONS AND OTHER HARMFUL DEFECTS.
7. UNSPECIFIED DIMS. TO BE TAKEN FROM SOLID MODEL AND ASK IF IN DOUBT.
8. UNSPECIFIED TOL. ON DIMS. AS PER ISO 8062-4 2023.

[illegible]