
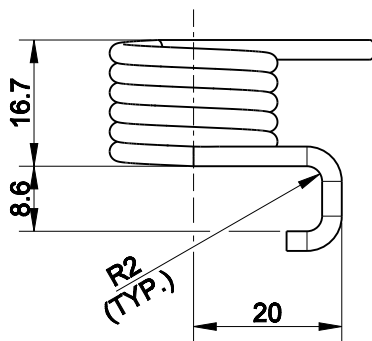


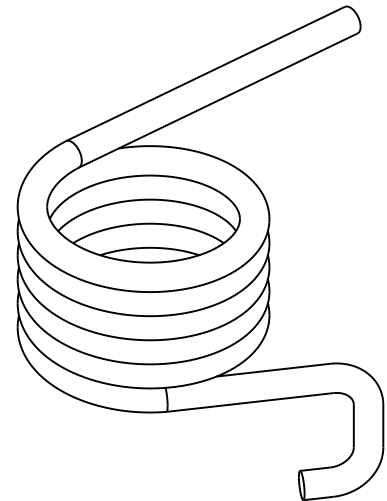

1. INNER DIA. OF SPRING	= 17 mm
2. DIA. OF SPRING WIRE	= 2.6 mm
3. WINDING DIRECTION	= LH - LEFT HAND
4. TOTAL NO. OF COILS	= 5.4
5. FREE LENGTH OF SPRING	= 16.7 mm
6. FULL DEFLECTION ANGLE	= 78°
7. SPRING RATE	= 8.2 N.m/Turn
8. MANDREL SIZE	= 14 mm

SPRING STEEL WIRE GRADE SH AS PER IS: 4454 (PART -1).

1. REMOVE ALL SHARP EDGES AND BURRS.
2. SUR. TREAT.: - ED COATING OF SIGNAL BLACK COLOR (RAL 9005), WITH MIN. COATING THK. OF 15µm.
3. UNSPECIFIED TOL. ON DIMS. AS PER IS: 2102-c.

[illegible]