



Vishakha
Inspire Growth to the World

Vishakha Multivista — Products

Inspire Growth to the World

COMPANY PROFILE

Official Website : <https://vishakhamultivistaproducts.in>



MAHALAKSHMI KANNAN
Managing Director



ABOUT US

- ❖ Manufacturing, Supply and Installation of Premium Steel Doors, Steel windows, Steel frames, Steel Ventilators. Vishakha Multivista elevate your homes with elegance and security
- ❖ We are in this field from 2018, have experienced staffs to give customer product with delight experience. Start from selection to supply, delivery and installations at single window operations
- ❖ We have consultancy services for Builders, Architects and Construction engineers Also, we are doing Turnkey Jobs for Multispecialty Hospitals and Institutions We look forward for your valuable enquiry for mutual benefits

COMMERCIAL DOORS

- ❖ The commercial steel door is a high-performance, factory-engineered door system constructed using galvanized iron (GI) sheets, designed specifically for heavy-duty applications in commercial, institutional, and industrial environments. The door shutter is fabricated from 0.8mm to 1.2mm thick GI sheets and filled with a high-strength core material such as honeycomb, rockwool, or polyurethane foam, based on the functional requirement—offering options for fire resistance, thermal insulation, and sound attenuation. The door is available in single or double-leaf configurations with standard sizes ranging from 900mm to 1500mm in width and up to 2400mm in height. The frame is formed from 1.2mm to 1.6mm thick GI sheets, either welded or knock-down type, with provisions for anchoring into masonry, concrete, or drywall structures.
- ❖ Surface finishing includes a zinc-based primer followed by a powder-coated or polyurethane-painted topcoat, available in standard RAL shades. Additional finishes such as anti-bacterial or anti-graffiti coatings can be provided on request. The door system is compatible with a wide range of architectural hardware including stainless steel ball-bearing hinges, mortise locks, lever handles, door closers, and optional panic bars or vision panels with fire-rated or wired glass. Louvers can also be integrated for ventilation, fitted with fly mesh as required.
- ❖ These doors are ideal for internal and external use in high-traffic areas like hospitals, office buildings, malls, airports, educational institutions, and industrial facilities. Key features include excellent structural strength, rust resistance, fire retardancy (non-rated to 2-hour options), termite-proof construction, and minimal maintenance. Fully customizable in terms of size, finish, accessories, and cutouts, commercial steel GI doors deliver a balance of durability, safety, and aesthetics for modern infrastructure requirements

GENRAL DOOR



Size:

Standard Width: 800mm – 1000mm

Height: 2000mm – 2100mm

Thickness: 40mm – 45mm

Materials:





1. Core: Honeycomb / Rockwool / Polyurethane Foam (PUF)
2. Shutter Skin: Galvanized Iron (GI), 0.8mm to 1.2mm thick
3. Finish: Powder-coated / Polyurethane painted (custom RAL shades available)

Frame:

1. Galvanized Iron (GI) Frame, 1.2mm – 1.6mm thick
2. Welded or knock-down type
3. Anchor fasteners for wall fixing

Applications:

Suitable for toilets, stores, utility rooms, corridor doors, and internal doors in commercial, institutional, or residential buildings

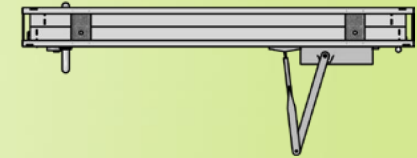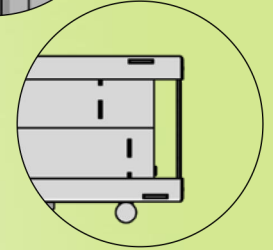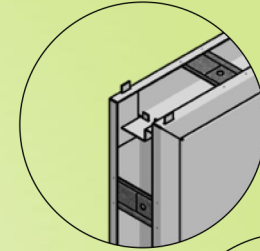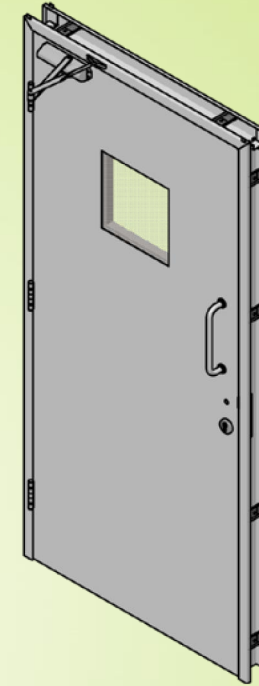

Door Types:

1. Flush Door (Plain or with Bead) With or without Vision Panel
Louver (optional)

Hardware (Optional):

1. SS Hinges, Mortise Lock / Lever Handle
2. Door Closer, Door Stopper, Rubber Gasket

2 Hrs Fire Rated Door



Material: Galvanized Steel / Stainless Steel

Core: Rockwool / Honeycomb / Ceramic Wool

Fire Rating: 120 minutes (UL / BS / IS standards)

Finish: Powder Coated / PU Painted




Hardware: Fire Rated Hinges, Panic Bar, Door Closer

Vision Panel: Fire Rated Glass (Optional)

Standard Sizes:

Single Door: 900 x 2100 mm

Double Door: 1800 x 2100 mm

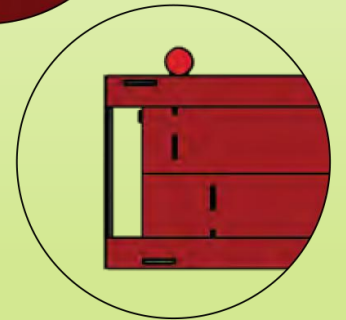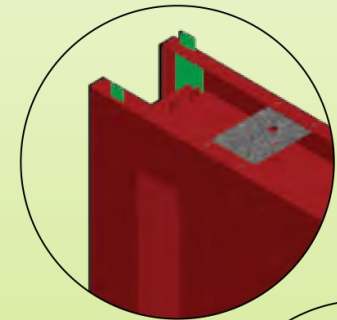

EGRESS DOOR

Materials:

Core: Honeycomb / Rockwool (for fire-rated models)

Finish: Galvanized Steel (GI) / Stainless Steel

Hardware: Panic bar, door closer, hinges, vision panel (optional)

Size:

Standard Width: 900mm – 1200mm

Height: 2100mm – 2400mm

Thickness: 40mm – 70mm (based on fire rating and material)

Features:



Compliant with international building and life safety codes

Outward-opening design for emergency egress

Available in single or double leaf

Smoke seal and intumescent strips available

Suitable for staircases, corridors, and emergency exits in commercial, residential, and industrial buildings

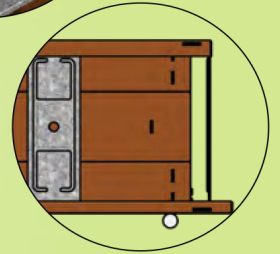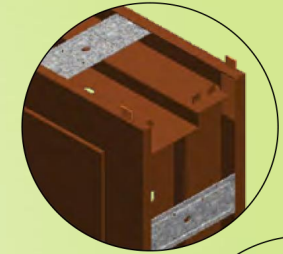

Fire Exit Door

Materials:

1. Core: Honeycomb / Rockwool
2. Shutter: Galvanized Iron (GI) 0.8mm – 1.2mm thick
3. Frame: GI 1.2mm – 1.6mm, welded or knock-down
4. Finish: Powder-coated / Painted (custom RAL shades)

Size:

1. Standard Width: 900mm – 1500mm
2. Height: Up to 2400mm
3. Thickness: 46mm – 70mm

Hardware (Optional):


1. SS Hinges, Lever Handle / Mortise Lock
2. Door Closer, Door Stopper
3. Optional: Vision Panel, Louvers, Push Plate

Features:

1. Rigid, rust-proof construction
2. Fire-retardant (non-rated or as required)
3. Termite-proof, maintenance-free
4. Custom designs and cutouts possible

Applications:

1. Internal and external use in commercial, industrial, institutional, and residential buildings
2. Utility rooms, service areas, common corridors

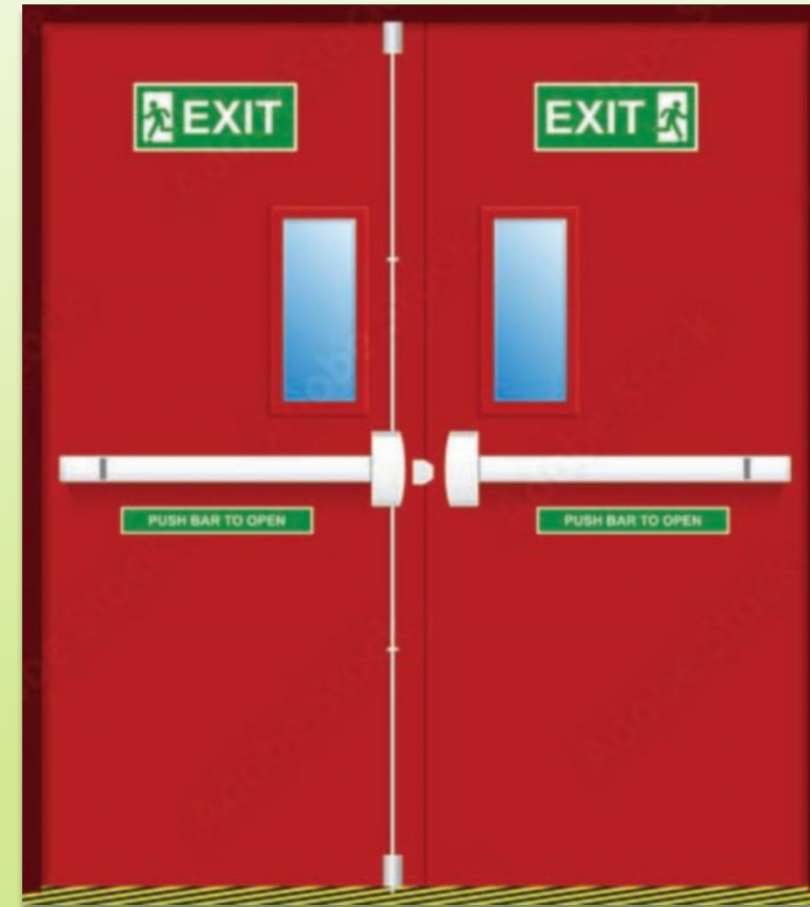

Stainless Steel Door



Technical Specifications

Material SS304

Infill Honeycomb / Puff / Rockwool

Frame Profile (mm)

Single Rebate 100x58x1.2, 100x58x1.6, 100x78x1.2/1.6

Double Rebate 143x58x1.2, 143x58x1.6, 143x78x1.2, 143x78x1.6

Door Sizes


Single Leaf upto 1420mm, upto 3000mm

Double Leaf upto 2840mm, upto 3000mm

Shutter thickness : 46mm

Areas of Application

Kitchens, Food Processing Areas, Hospitals,
Cleanrooms, Industrial Facilities.

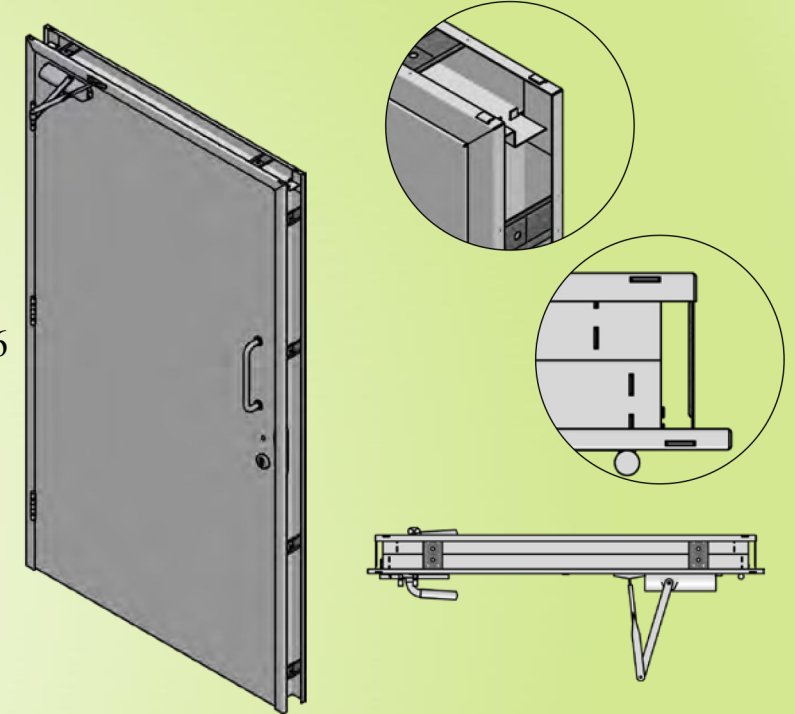

Stainless steel doors are crafted for durability, strength, and corrosion resistance, making them an ideal choice for high-performance environments. Designed to withstand harsh conditions, they are easy to maintain and provide long-lasting performance.

ACOUSTIC DOORS



Technical Specifications

Material GPSP (Galvanized Plain Skin Pass)

Infill Rockwool

Frame Profile (mm)

Single Rebate 100x58x1.6, 100x78x1.6

Double Rebate 143x58x1.6, 143x78x1.6

Door Sizes


Single Leaf upto 1420mm, upto 3000mm

Double Leaf upto 2840mm, upto 3000mm

Shutter thickness : 46mm

Areas of Application

Studios, Conference Rooms, Hospitals, Hotels, and Offices where soundproofing and noise control are required.

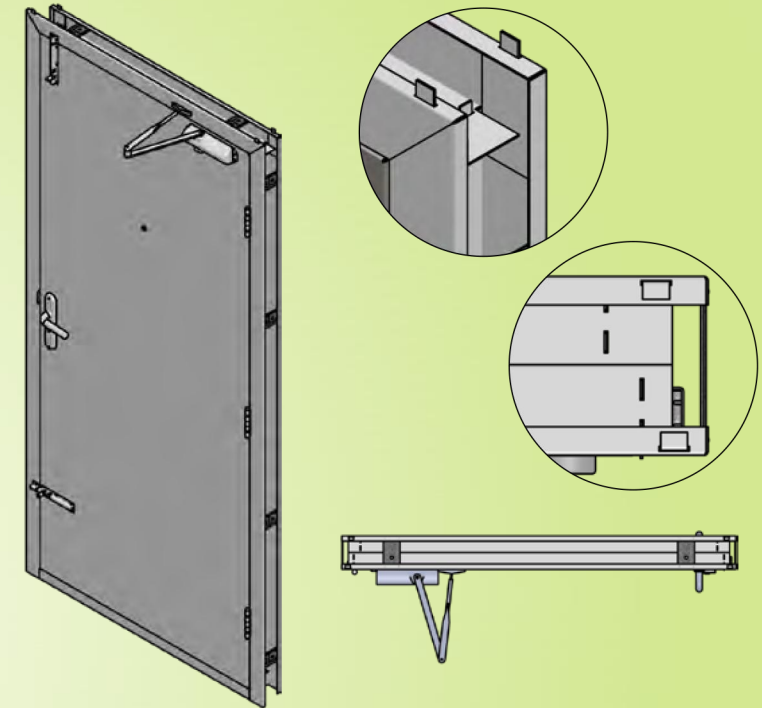

Acoustic doors are designed to provide superior sound insulation, ensuring noise reduction and enhanced privacy. Constructed with high-density materials and advanced sealing technology, these doors effectively block sound transmission while maintaining strength and durability.

GENERAL SLIDING DOORS

Technical Specifications

Material GPSP (Galvanized Plain Skin Pass)

Infill Honeycomb / Puff / Rockwool

Frame Profile (mm)

Single Rebate 80x65x1.20mm / 80x65x1.6mm

Double Rebate N/A

Door Sizes


Single Leaf upto 1420mm, upto 3000mm

Double Leaf upto 2840mm, upto 3000mm

Shutter thickness: 46mm

Areas of Application

Retail Stores, Malls, Office Buildings,
Hospitals

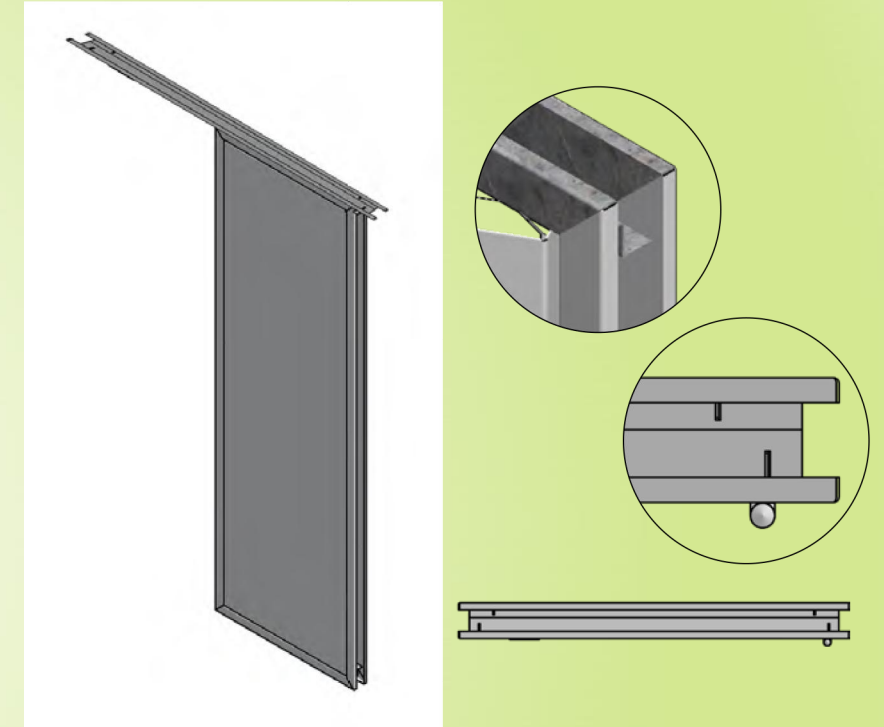

General sliding doors provide a space-saving solution with smooth operation and durable tracks. Designed for reliability, they offer easy access and a modern aesthetic, perfect for high-traffic areas or stylish spaces.

EGRESS DOORS



Material :GPSP (Galvanized Plain Skin Pass)

Infill : Honeycomb / Puff / Rockwool

Frame Profile (mm)

Single Rebate 100x65x1.20mm / 100x65x1.6mm

Double Rebate N/A

Door Sizes

Single Leaf upto 1420mm, upto 3000mm


Double Leaf upto 2840mm, upto 3000mm

Shutter thickness : 46mm

Areas of Application

Commercial Buildings, Hospitals, Schools,
Industrial Facilities, Hotels, and Residential
Buildings

Our shaft doors offer reliable access and safety for service areas like elevator shafts and utility rooms. Made from highgrade steel, they meet fire safety and durability standards. Available in various sizes and finishes for a perfect fit in any project.

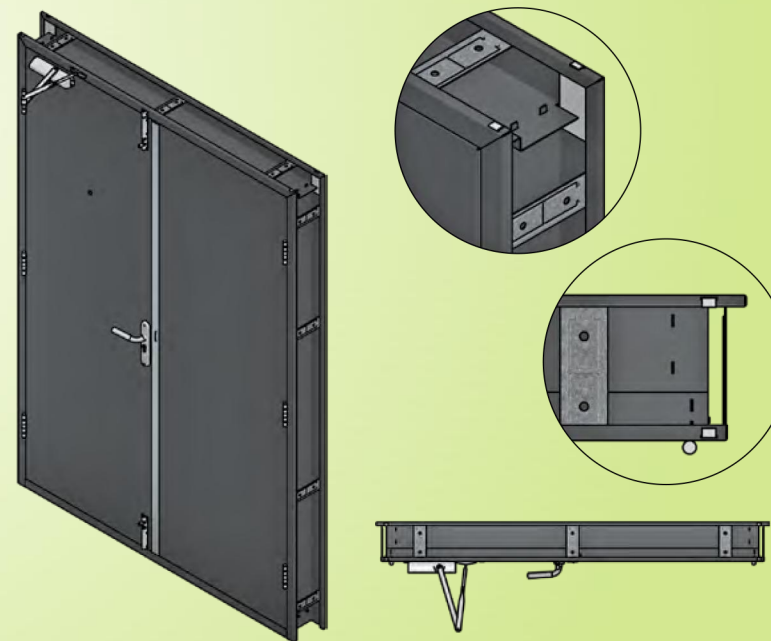

RAIL AND STILE DOORS



Technical Specifications

Material GPSP (Galvanized Plain Skin Pass)

Infill Honeycomb / Puff / Rockwool

Frame Profile (mm)

Single Rebate 100x58x1.2, 100x58x1.6, 100x78x1.2/1.6

Double Rebate 143x58x1.6, 143x78x1.6

Door Sizes

Single Leaf upto 1420mm, upto 3000mm


Double Leaf upto 2840mm, upto 3000mm

Shutter thickness : 46mm

Areas of Application

Commercial and Residential Buildings where Aesthetics and Large Glass Panels are desired, such as Offices, Lobbies, and Public Spaces.

Rail and stile doors combine a large glass panel with a metal frame, offering modern aesthetics and steel durability. Customizable in size, finish, and hardware, they balance transparency and strength for visually striking, secure spaces.

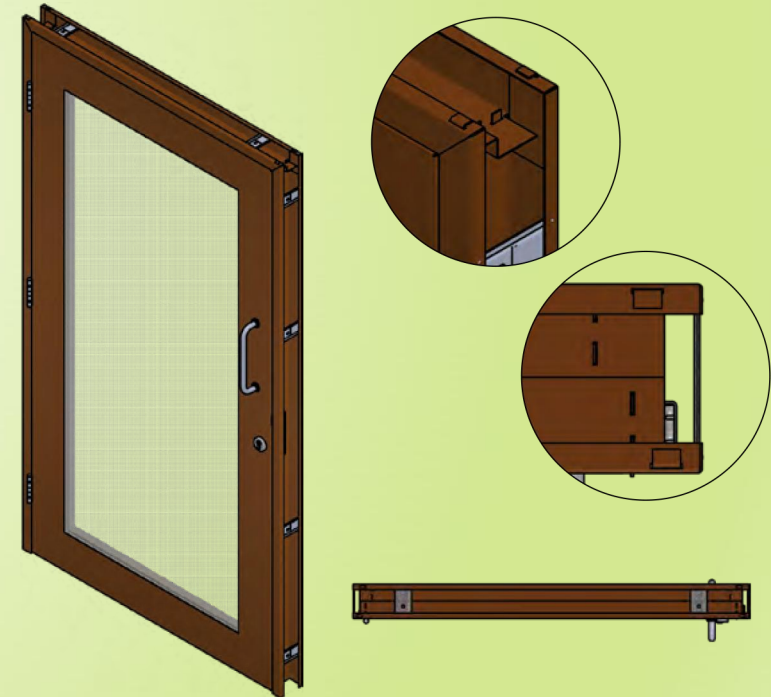

SCIENTIFIC DOORS



Material : GPSP (Galvanized Plain Skin Pass)

Infill : Honeycomb / Puff / Rockwool

Frame Profile (mm)

Single Rebate : 100x58x1.2, 100x58x1.6, 100x78x1.2/1.6

Double Rebate : 143x58x1.6, 143x78x1.6


Door Sizes

Single Leaf upto 1420mm, upto 3000mm

Double Leaf upto 2840mm, upto 3000mm

Shutter thickness :46mm

Scientific doors, made from stainless or galvanized steel, offer easy cleaning and durability. Their smooth, nonporous surfaces resist dirt, germs, and chemicals, providing protection against bacteria and insects.

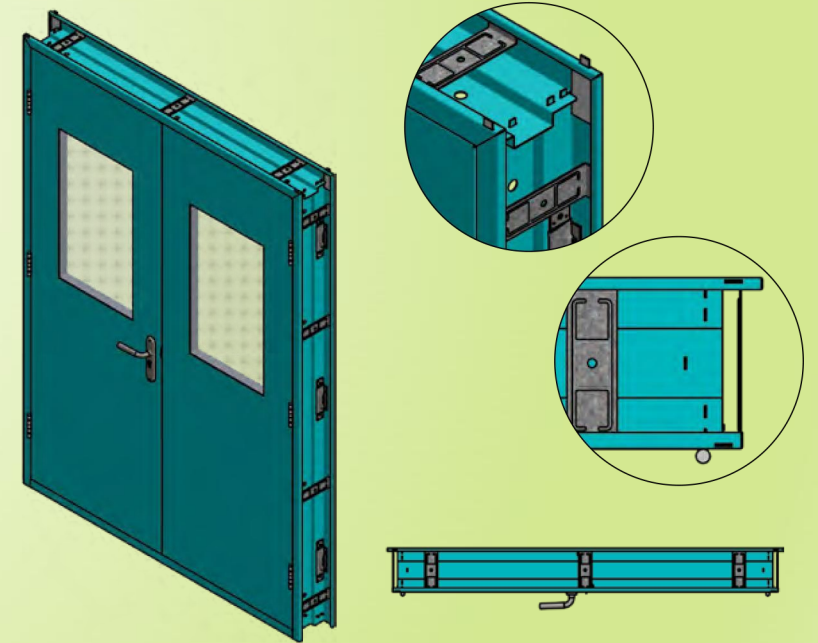

Lead Line Door

Technical Specifications

Material



GPSP (Galvanized Plain Skin Pass)
Infill Puff / Rockwool with Lead Sheet

Frame Profile (mm)

Single Rebate 100x58x1.2, 100x58x1.6, 100x78x1.2/1.6
Double Rebate 143x58x1.6 , 143x78x1.6

Door Sizes

Single Leaf upto 1420mm, upto 3000mm
Double Leaf upto 2840mm, upto 3000mm
Shutter thickness:46mm

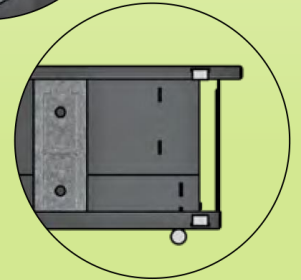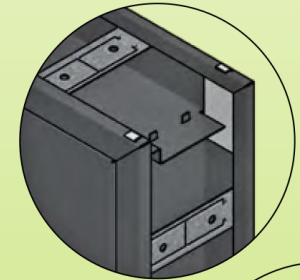

Automatic Sliding Door

Technical Specifications

1. Single sliding door

Bi-parting sliding doors (two panels sliding in opposite directions)

2. Door Material

Tempered or laminated glass (8–12 mm thick)

steel, or UPVC frames

Optional: Composite panels for specific designs

3. Opening Size

Width: 1000–3000 mm (customizable)

Height: 2100–3000 mm (customizable)

4. Drive System

Motorized mechanism (usually brushless DC motor)

Rated voltage: 24V DC

Power supply: 230V AC, 50/60 Hz

Opening speed: 300–600 mm/s

Closing speed: 250–500 mm/s

Hold open time: Adjustable (1–10 seconds)



Fully Louvered Metal Door

Types of Specifications

Material:

- Door Sheet: Galvanized Steel (GI) or Mild Steel (MS), Aluminium and UPVC
- Louver Fins: Same material as the door (GI/MS)
- Frame: Pressed steel sheet or angle iron (usually 1.2mm to 1.6mm thick)

Door Size (Standard)

- Single Door: 900 mm × 2100 mm
- Double Door: 1800 mm × 2100 mm (or as per requirement)
- Custom sizes are available based on the ventilation and room size requirements.

Thickness:

Door Shutter:

- 0.8 mm to 1.2 mm thick GI/MS sheet

Frame:

- 1.2 mm to 1.6 mm thick GI/MS sheet

Louvers:

- Fixed louvers with inverted "Z" or "Y" type blades.
- Blade Pitch: 25 mm to 50 mm
- Louver Coverage Area: Typically 75%–90% of the shutter area.
- Louvers are welded or riveted to the door panel and reinforced for strength.

Applications : Electrical Room, Pump Room , Ventilation Room



Manual Sliding Door



Technical Specifications

1. Type

Single or double panel sliding doors

Pocket door or barn door style

2. Door Material

Glass, steel, or PVC

Glass thickness: 8–12 mm for frameless doors

3. Opening Size

Width: 800–3000 mm

Height: 2100–3000 mm

Custom sizes possible

4. Hardware

Sliding rollers and brackets (nylon or steel)

Handles and locks (optional)

Soft-close mechanisms (optional)

Clean Room Door



Technical Specifications

Type: GI clean room door (single or double leaf)

Glass: 10mm/12mm thick toughened safety glass (clear/frosted as per requirement)

Frame: Powder-coated or stainless steel (SS 304) for clean room compatibility

Size: As per architectural/clean room layout drawings

Hardware: Clean room-compatible stainless steel hinges, D-handle, lockset, and door closer

Sealing: EPDM gaskets or magnetic seals for airtightness

Finish: Flush surfaces with easy-to-clean profiles, antimicrobial coating if required

Compliance: Meets GMP/ISO clean room standards

Installation: To be installed by trained personnel following clean room protocols
Optional Features: Vision panel, interlocking system, access control readiness



Fully Glazed Door

Technical Specifications

Type: Single/Double leaf fully glazed door

Door Leaf: Toughened/Safety glass, 10mm/12mm thick/14mm (as specified)

Frame: Steel/PVC (optional, as per design)

Glass Type: Clear/Tinted/Frosted/Low-E glass

Size: As per approved architectural drawings

Hardware: Stainless steel hinges, floor spring/patch fittings, handle, lockset


Finish: Polished edges, smooth surface

Compliance: Conforms to IS 2553 / BS EN 12150 (or relevant standard)

Installation: To be carried out by skilled technicians as per manufacturer's guidelines

Accessories: Door closers, gaskets, and seals as required for air/water tightness



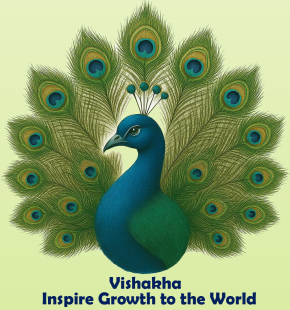

Vishakha Multivista Products Pvt Ltd.,

For more Information Visti our Website :

<https://vishakhamultivistaproducts.in>

Office Address:

No : 8/65, First Floor, M K Pathamnaban Street,

C Pallavaram, Chennai - 43

Cell : 9444602376

Email : salesvishakha2024@gmail.com