
Flyback 24V in, 12V/2A out, 100kHz. Power stage only: no PWM controller or feedback yet.
Two grounds on purpose: GND_PRI (input side) and GND_SEC (output side) form the isolation barrier.
T1 footprint is unassigned until a core and bobbin are chosen. Pin 1 and pin 3 are the dot terminals.

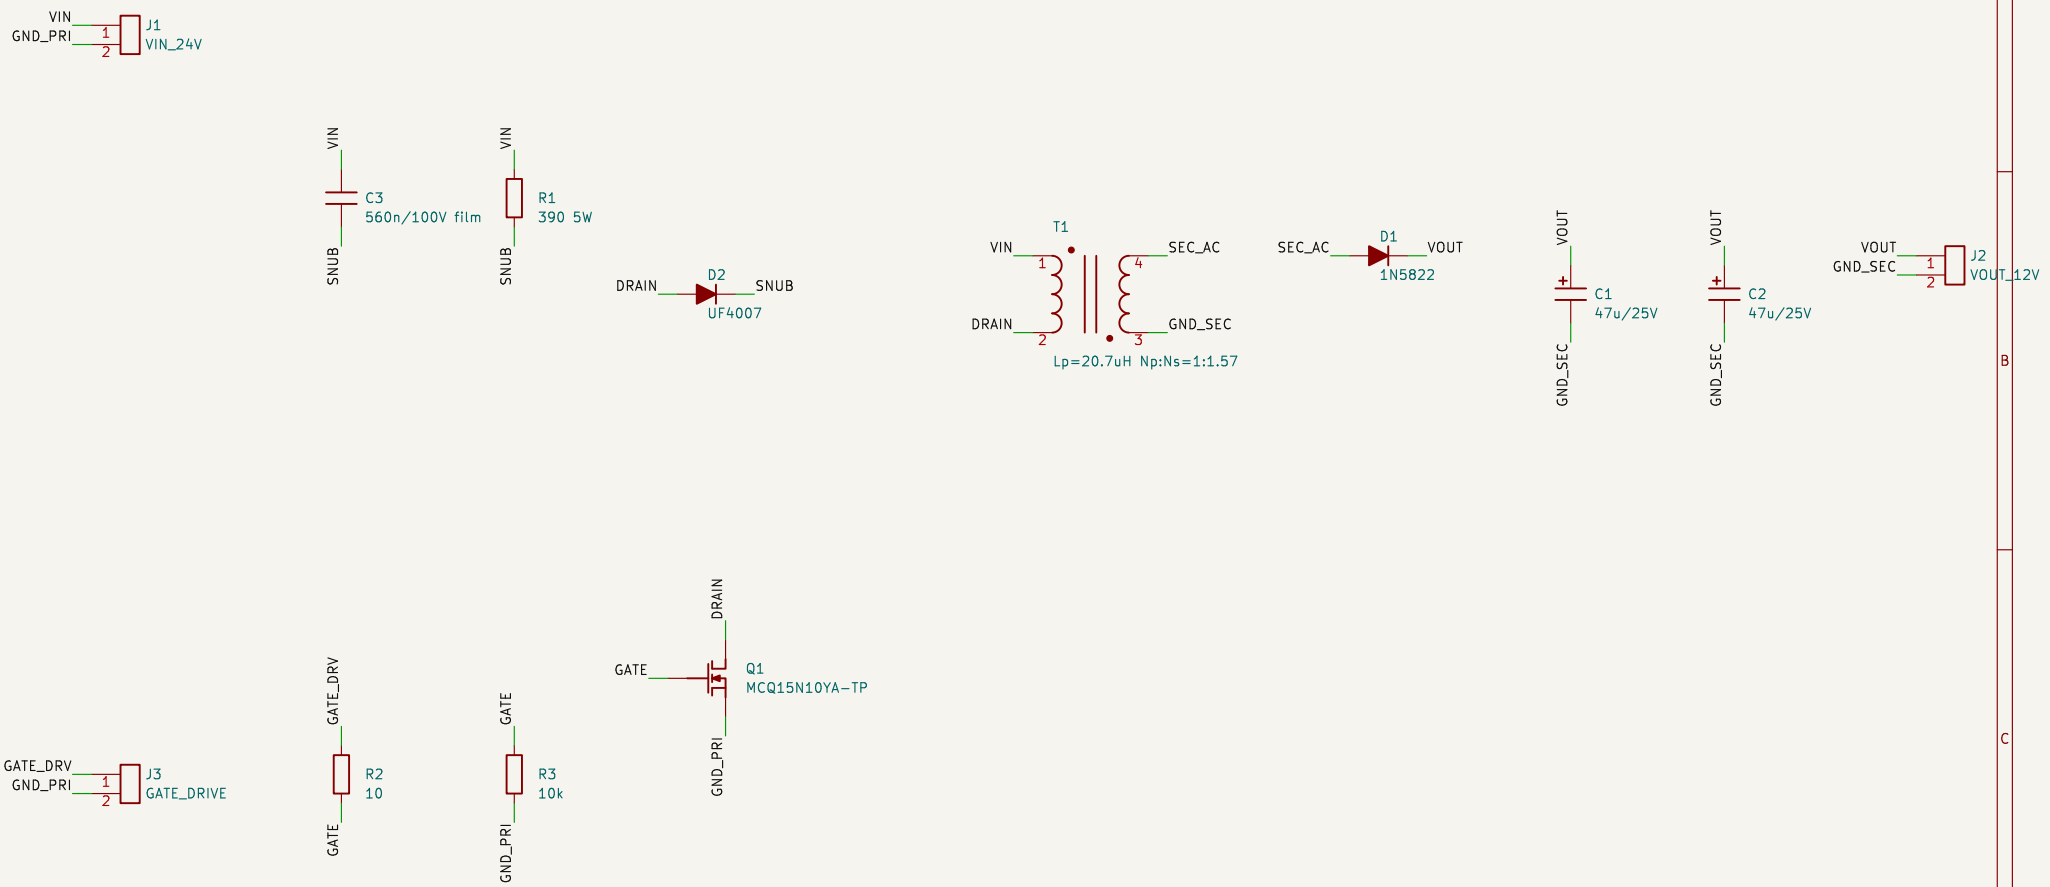

Sheet: /		
File: flyback.kicad_sch		
Title: Flyback 24V to 12V 24W power stage		
Size: A4	Date: 2026-10-21	**Rev: 0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1