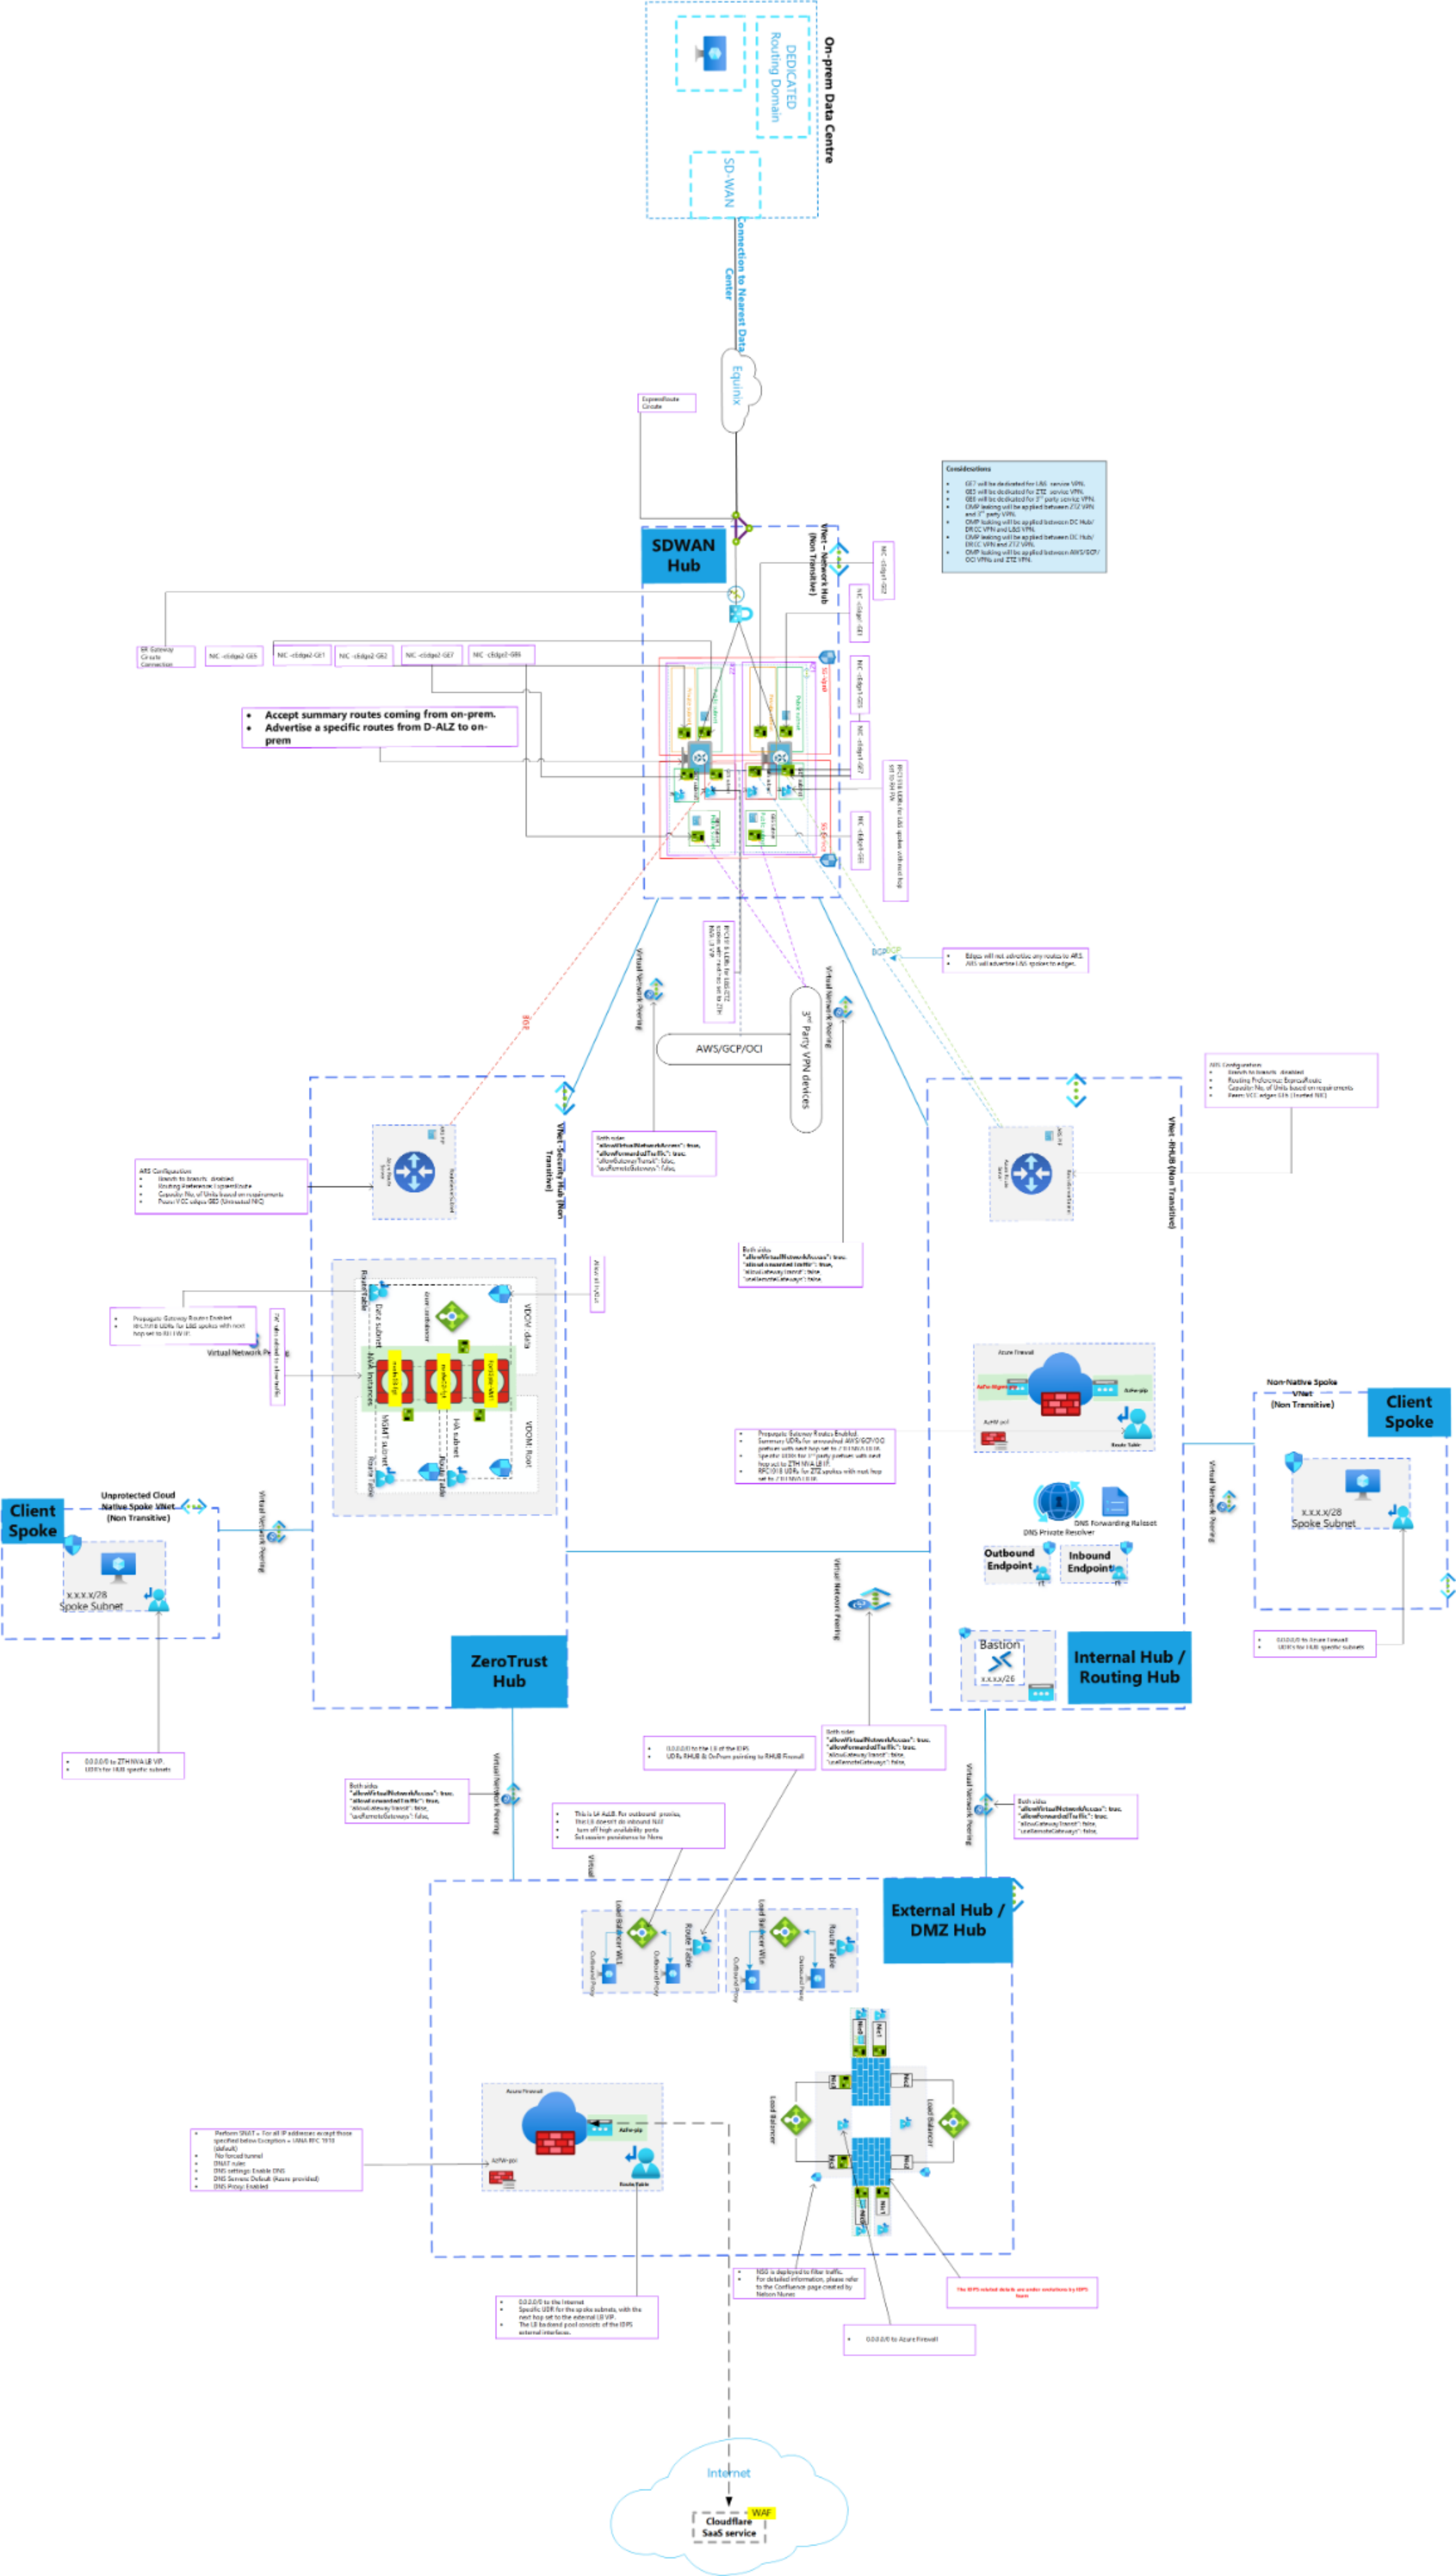

Considerations

- GE7 will be dedicated for L&S service VPN.
- GE5 will be dedicated for ZTZ service VPN.
- GE8 will be dedicated for 3rd party service VPN.
- OMP leaking will be applied between ZTZ VPN and 3rd party VPN.
- OMP leaking will be applied between DC Hub/ DR DC VPN and L&S VPN.
- OMP leaking will be applied between DC Hub/ DR DC VPN and ZTZ VPN.
- OMP leaking will be applied between AWS/GCP/ OCI VPNs and ZTZ VPN.

- **Accept summary routes coming from on-prem.**
- **Advertise a specific routes from D-ALZ to on-prem**

RFC1918 UDRs for L&S spokes with next hop set to RH FW.

RFC1918 UDRs for L&S/ZTZ spokes with next hop set to ZTH NVA LB VIP.

- Edges will not advertise any routes to ARS.
- ARS will advertise L&S spokes to edges.

Both sides:
"allowVirtualNetworkAccess": true,
"allowForwardedTraffic": true,
"allowGatewayTransit": false,
"useRemoteGateways": false,

Both sides:
"allowVirtualNetworkAccess": true,
"allowForwardedTraffic": true,
"allowGatewayTransit": false,
"useRemoteGateways": false,

ARS Configuration
- Branch to branch: disabled
- Routing Preference: ExpressRoute
- Capacity: No. of Units based on requirements
- Peers: VCC edges GE8 (Untrusted NIC)

ARS Configuration
- Branch to branch: disabled
- Routing Preference: ExpressRoute
- Capacity: No. of Units based on requirements
- Peers: VCC edges GE6 (Trusted NIC)

- Propagate Gateway Routes Enabled
- RFC1918 UDRs for L&S spokes with next hop set to RH FW IP.

- Propagate Gateway Routes Enabled.
- Summary UDRs for unmatched AWS/GCP/OCI prefixes with next hop set to ZTH NVA LB IP.
- Specific UDRs for 3rd party prefixes with next hop set to ZTH NVA LB IP.
- RFC1918 UDRs for ZTZ spokes with next hop set to ZTH NVA LB IP.

- 0.0.0.0/0 to ZTH NVA LB VIP.
- UDR's for HUB specific subnets

- 0.0.0.0/0 to Azure Firewall
- UDR's for HUB specific subnets

Both sides:
"allowVirtualNetworkAccess": true,
"allowForwardedTraffic": true,
"allowGatewayTransit": false,
"useRemoteGateways": false,

- 0.0.0.0/0 to the LB of the IDPS
- UDRs RHUB & OnPrem pointing to RHUB Firewall

Both sides:
"allowVirtualNetworkAccess": true,
"allowForwardedTraffic": true,
"allowGatewayTransit": false,
"useRemoteGateways": false,

- This is L4 ALB. For outbound proxies,
- This LB doesn't do inbound NAT
- turn off high availability ports
- Set session persistence to None

Both sides:
"allowVirtualNetworkAccess": true,
"allowForwardedTraffic": true,
"allowGatewayTransit": false,
"useRemoteGateways": false,

- Perform SNAT = For all IP addresses except those specified below Exception = IANA RFC 1918 (default)
- No forced tunnel
- DNAT rules
- DNS settings: Enable DNS
- DNS Servers: Default (Azure provided)
- DNS Proxy: Enabled

- 0.0.0.0/0 to the Internet
- Specific UDR for the spoke subnets, with the next hop set to the external LB VIP.
- The LB backend pool consists of the IDPS external interfaces.

- NSG is deployed to filter traffic.
- For detailed information, please refer to the Confluence page created by Nelson Nunes

The IDPS related details are under evolutions by IDPS team

- 0.0.0.0/0 to Azure Firewall