


Logical Physical x 168, y 0

Root 06 03 0

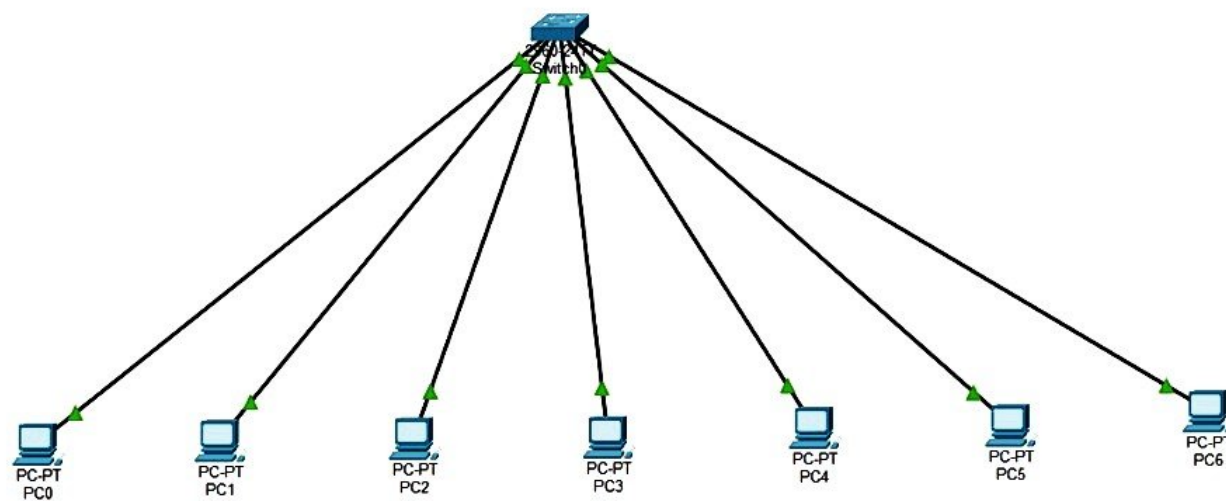

Time 00:11:58

Realtime Simulation




Scenario 0

New Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	PC2	ICMP		0.000	N	0	(edit)	(delete)

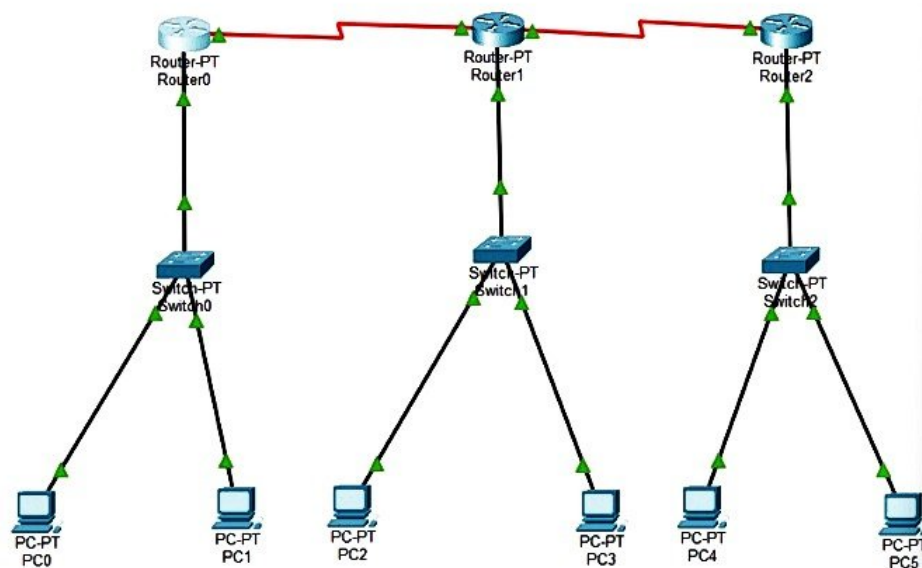

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Static Routes


Network	30.0.0.0
Mask	255.0.0.0
Next Hop	40.40.40.2

Add


Remove

Equivalent IOS Commands

```
Router(config)#ip address 10.10.10.1 255.0.0.0
Router(config-if)#ip address 40.40.40.1 255.0.0.0
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 20.0.0.0 255.0.0.0 40.40.40.2
Router(config)#ip route 30.0.0.0 255.0.0.0 40.40.40.2
Router(config)#
```



Logical Physical c 76 y: 0

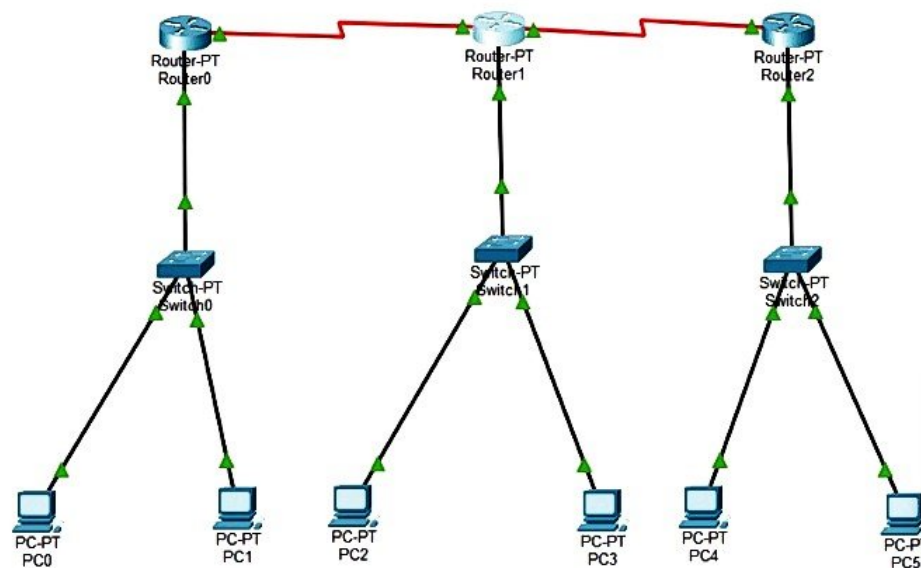

Router1

Physical Config CLI Attributes

Static Routes

Network	30.0.0.0
Mask	255.0.0.0
Next Hop	50.50.50.2

Add

Remove

INTERFACE


FastEthernet0/0	
FastEthernet1/0	
Serial2/0	
Serial3/0	10.0.0.0/8 via 40.40.40.1
FastEthernet4/0	30.0.0.0/8 via 50.50.50.2
FastEthernet5/0	

Equivalent IOS Commands

```
Router(config)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#ip address 50.50.50.1 255.0.0.0
Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up

Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 10.0.0.0 255.0.0.0 40.40.40.1
Router(config)#ip route 30.0.0.0 255.0.0.0 50.50.50.2
Router(config)#
```

Time 00:21:20




Scenario 0

New Delete

Toggle PDU List Window

Realtime Simulation

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
------	-------------	--------	-------------	------	-------	-----------	----------	-----	------	--------

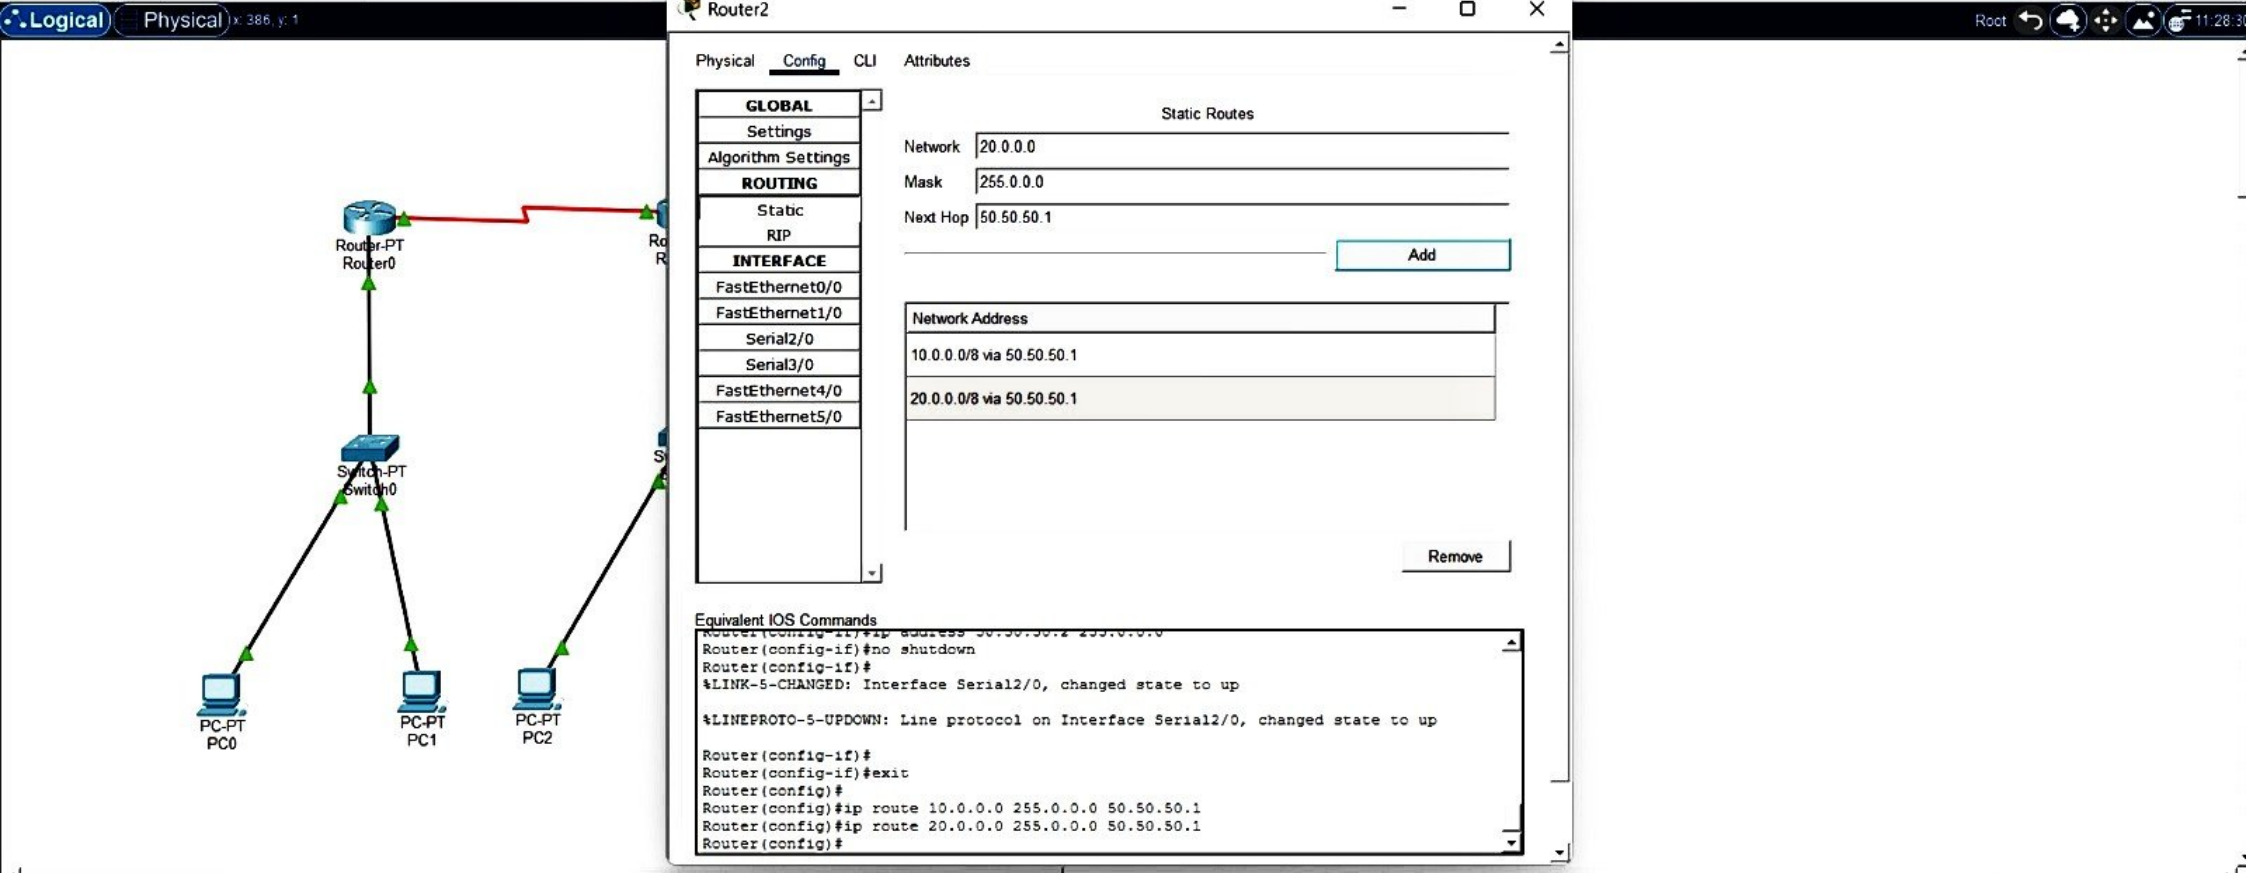

Router2

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Static Routes

Network: 20.0.0.0

Mask: 255.0.0.0

Next Hop: 50.50.50.1

Add

Remove


Network Address



10.0.0.0/8 via 50.50.50.1

20.0.0.0/8 via 50.50.50.1

Equivalent IOS Commands

```
Router(config)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 10.0.0.0 255.0.0.0 50.50.50.1
Router(config)#ip route 20.0.0.0 255.0.0.0 50.50.50.1
Router(config)#
```

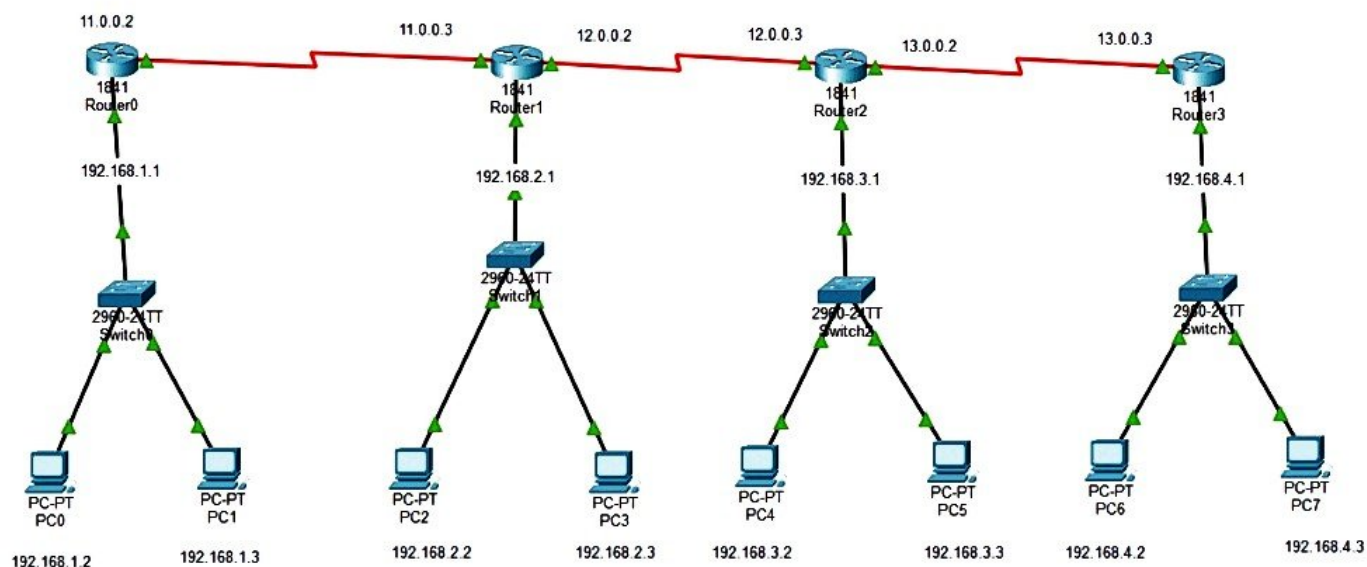

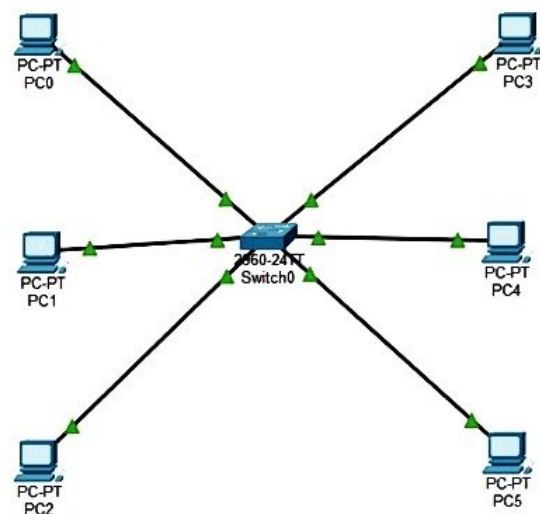

Scenario 0

New Delete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	PC0	192.168.1.4	ICMP		0.000	N	0	(edit)	(delete)
	Successful	PC0	255.255.2...	ICMP		0.000	N	1	(edit)	(delete)