

Item 855, 64-pin Boardmount Socket.....9.95 each

Use this connector to interface custom-designed CB boards to the CableEye base unit or QuickMount Housing (Item 712, p.7).

The 3M 8564-4500PL 64-pin boardmount socket that has been used on CableEye CB boards since 1994 was discontinued by 3M in February, 2017. We found replacement socket shown below from an Asian supplier which actually has fit and high voltage qualities superior to the 3M product and is now used on all CB boards. We purchase these in large quantities from the our supplier. To our knowledge, this is not available through distribution. You may order these as needed directly from CAMI Research.



64-Pin Boardmount Socket (Item 855)

B22b FEMALE HEADER WITH POLARIZATION BUMP STR (H: 11.0mm)

PITCH: 2.54mm * 2.54mm

SPECIFICATIONS



Material

Insulator : PBT, glass reinforced, rated UL 94V-0
Contact : Brass


Electrical

Current Rating : 1 Amp
Contact Resistance : 30 mΩ max.
Insulation Resistance : 3000 MΩ min.
Dielectric Withstanding Voltage : 500V AC for 1minute
Operating Temperature : -40°C to +105°C






► Mating Suggestion : C03, C03b, C03c, C03e, C04, C04a, C04c & C04d series.

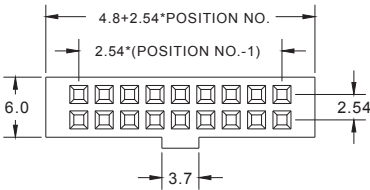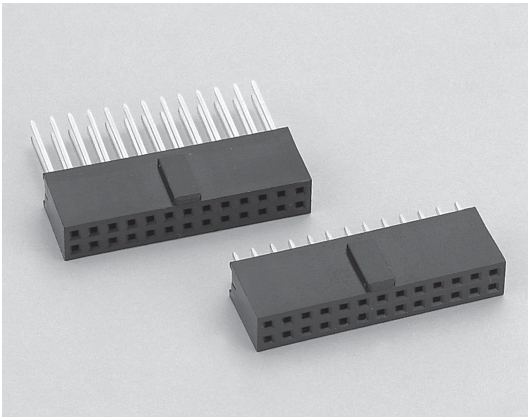


(TYPE A)



(TYPE B)

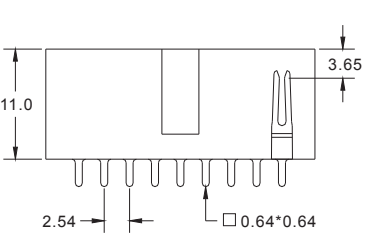

RECOMMENDED P.C.B LAYOUT



RECOMMENDED P.C.B LAYOUT

How to order: B22b - 1 - 2 - 3 - 4 - 5 - 6 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR TYPE	5.PIN LENGTH	6.INSULATOR COLOR
06 08 10 12 14 16 20 24 26 30 34 40 44 50 60 64	A: BRASS	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	A: TYPE A B: TYPE B	A: 3.2mm B: 6.0mm C: 7.9mm D: 12.0mm	1. BLACK